INCH-POUND

MIL-L-10269H
5 July 1991
SUPERSEDING
MIL-L-10269G
22 June 1984

MILITARY SPECIFICATION

LUBRICATING AND SERVICING UNIT,

POWER-OPERATED, PORTABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a lubricating and servicing unit (hereinafter called lubricator) for installation on a trailer chassis. The lubricator shall dispense lubricants and supply compressed air for the maintenance of equipment under both normal and extreme climatic conditions.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-393 - Extinguisher, Fire, Dry Chemical, (Hand Portable).
A-A-50477 - Oilers, Hand, Pump.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir, Research, Development and Engineering Center, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

GG-G-91	- Gage, Tire Pressure, Self-Contained and Inflator-Gage, Pneumatic Tire.
QQ-A-200	- Aluminum Alloy Bar, Rod, Shapes, Structural Shapes, Tube and Wire Extruded.
QQ-A-200/9	- Aluminum Alloy Bar, Rod, Shapes, Tube, and Wire Extruded, 6063.
QQ-A-250	- Aluminum and Aluminum Alloy Plate and Sheet, General Specification for.
QQ-A-250/11	- Aluminum Alloy 6061, Plate and Sheet.
QQ-S-700	- Steel Sheet and Strip, Medium and High Carbon.
TT-P-664	- Primer Coating, Alkyd, Corrosion-Inhibiting, Lead and Chromate Free, VOC - Compliant.
GGG-B-451	- Blade, Hand Hacksaw and Blade, Power Hacksaw.
GGG-F-671	- Frame, Hand Hacksaw; Frame, Jeweler's Saw; and Frame, Coping Saw.
GGG-G-770	- Gun, Air Blow, (Blast Cleaning).
PPP-B-636	- Box, Fiberboard.
PPP-D-705	- Drum: Metal Shipping, Steel (Over 12 and Under 55 Gallon).
PPP-D-729	- Drums: Metal, 55-Gallon (for Shipment of Noncorrosive Material).
PPP-P-40	- Packaging and Packing of Hand Tools.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-V-173	- Varnish, Moisture-and-Fungus-Resistant, (for the Treatment of Communications, Electronic, and Associated Electrical Equipment).
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-L-2104	- Lubricating Oil, Internal Combustion Engine, Tactical Service.
MIL-L-2105	- Lubricating Oil, Gear Multipurpose.
MIL-R-3065	- Rubber, Fabricated Products.
MIL-F-3541	- Fittings, Lubrication.
MIL-C-3600	- Compressor, Reciprocating, Power-Driven: Air and Gas (Except Oxygen and Refrigerant): Packaging of.
MIL-G-3859	- Grease Guns, Hand, High Pressure, Lever-Operated; Cartridge and Bulk Loading (14-Ounce and 21 Ounce Capacity).
MIL-H-3868	- Hose Assemblies, Grease Gun, High and Low Pressure.
MIL-C-4109	- Coupling Assembly, Low Pressure, Air-Hose, Quick Disconnect.
MIL-L-4387	- Lubrication Dispensing Equipment Accessories.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

MIL-C-4556 - Coating Kit, Epoxy, for Interior of Steel Fuel Tanks.
MIL-E-10062 - Engines: Preparation for Shipment and Storage of.
MIL-M-10304 - Meters, Electrical Indicating, Panel Type, Ruggedized, General Specification for.
MIL-G-10924 - Grease, Automotive and Artillery.
MIL-H-13444 - Hose, Rubber: Fuel and Oil.
MIL-C-13486 - Cable, Special Purpose, Electrical: Low-Tension, Heavy Duty Single-Conductor and Multiconductor.
MIL-E-16298 - Electric Machines Having Rotating Parts and Associated Repair Parts: Preparation for Delivery of.
MIL-P-17802 - Padlocks, and Padlock Sets, Low Security, Key Operated Regular (Open) Shackle.
MIL-T-22085 - Tape, Adhesive, Preservation and Sealing.
MIL-P-23377 - Primer Coating, Epoxy Polyamide, Chemical and Solvent Resistant.
MIL-G-23827 - Grease, Aircraft and Instrument, Gear and Actuator Screw.
MIL-L-46167 - Lubricating Oil, Internal Combustion Engine, Arctic.
MIL-C-46168 - Coating, Aliphatic Polyurethane Chemical Agent Resistant.
MIL-E-46717 - Engines, Gasoline: Air-Cooled, Industrial-Type, 4-Cycle, Military-Design, 1-1/2, 3, and 6 Net Continuous Horsepower.
MIL-T-46786 - Tanks, Fuel, Engine, General Requirements for.
MIL-C-52437 - Chassis, Trailer, Trailing Arm, 2-Wheel, 2-1/2-Ton.
MIL-C-52950 - Crate, Wood, Open and Covered.
MIL-V-62038 - Vehicle, Wheeled, Preparation for Shipment and Storage of.
MIL-H-62315 - Heater Assembly, Combustion, Vehicular Compartment, 60,000 BTU/Hr.
MIL-S-81733 - Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

FEDERAL

FED-STD-313 - Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

MIL-STD-209	-	Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-461	-	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.
MIL-STD-889	-	Dissimilar Metals.
MIL-STD-1186	-	Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.
MIL-STD-1190	-	Minimum Guidelines for Level C Preservation, Packing and Marking.
MIL-STD-1300	-	Engine, Gasoline, Air-Cooled, 6 BHP, Military Design, Model 4-A032, Installation Procedures.
MIL-STD-1410	-	Methods for Selection for Industrial Engines for End Item Application.
MIL-STD-1472	-	Human Engineering Design Criteria For Military Systems, Equipment and Facilities.
MIL-STD-1474	-	Noise Limits for Army Materiel.
MS24538	-	Transmitter, Pressure - 24 Volt D.C. 60 PSI.
MS24541	-	Indicator, Pressure - 24 Volt D.C., Range 0-60 PSI.
MS24544	-	Indicator, Liquid Quantity - 24 Volt D.C. Engine Fuel.
MS35000	-	Battery, Storage, Lead-Acid, Waterproof.
MS35827	-	Hinge, Continuous (Piano), .060 Thickness .250 Pin Dia.
MS35844	-	Plug, Machine Thread; Magnetic (Drain).
MS49006	-	Plugs, Pipe, Magnetic - Headless; Aluminum Iron or Steel.
MS500040	-	Transmitter, Liquid Quantity, Float Type, Engine Fuel.

HANDBOOKS

MIL-HDBK-781	-	Reliability Test Methods, Plans, and Environments for Engineering Development, Qualification, and Production.

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government drawings. The following other Government drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

13228E2593	-	Kit, Decontaminating Apparatus, M13: Lubricating and Servicing Unit Portable, Trailer Mounted.
13228E2594	-	Instruction Sheet, Decontaminating Apparatus, M13: Lubricating and Servicing Unit, Portable, Trailer Mounted.

(Copies of drawings required by contractors in connection with specific acquisition functions should be obtained from the USA Belvoir Research, Development, and Engineering Center, ATTN: STRBE-FSH, Fort Belvoir, VA 22060-5606.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 36/A 36	-	*Standard Specification for* Structural Steel.
A 108	-	Steel Bars, Carbon, Cold Finished Standard Quality.
A 268	-	Seamless and Welded Ferritic and Martensitic Stainless Steel Tubing for General Service.
A 463	-	Standard Specification for Steel Sheet, Cold-Rolled, Aluminum - Coated, type 1 and type 2.
A 575	-	Steel Bars, Carbon, Merchant Quality, M-Grades.
A 663	-	Steel Bars, Carbon, Merchant Quality, Mechanical Properties.
D 2000	-	Standard Classification System for Rubber Products in Automotive Applications.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code

Section VIII	-	Rules for Construction of Pressure Vessels.
Section IX	-	Qualification Standard for Welding and Brazing Procedures, Welders, Brazers, and Welding and Brazing Operators.

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:43Z
Check the source to verify that this is the currenversion before use.

(Application for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10017.)

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1 Structural Welding Code - Steel.
AWS D1.2 Structural Welding Code - Aluminum.

(Application for copies should be addressed to the American Welding Society, 550 N.W. LeJeune Road, P.O. Box 351040, Miami, FL 33135.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT (NMFTA)

National Motor Freight Classification Rules.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Traffic Order Section, 2200 Mill Road., Alexandria, VA 22314.)

RUBBER MANUFACTURERS ASSOCIATION (RMA)

Engineering Standards for Multiple V-Belt Drives.

(Application for copies should be addressed to the Rubber Manufacturers Association, 1400 K Street, NW, Suite 900, Washington, DC 20005.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE J492 - Rivets and Riveting.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT (UCC)

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The lubricating and servicing unit (lubricator) shall consist essentially of the following components: An enclosure, a three-compartment lubricant container, air-powered lubricant pumps, air compressor, air receiver, engine, hose, hose reels, and accessories. The lubricator components shall be mounted on a steel skid framework to form a self-contained unit.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.6).

3.2.1 Winterized first article. When winterized lubricators are specified (see 3.36) in addition to nonwinterized lubricators, two first article models shall be furnished for examination and test. One first article model shall be a nonwinterized lubricator and one shall be a winterized lubricator.

3.3 Material. Material shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The lubricator shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the lubricator may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.1.3 Hazardous material. Hazardous materials related to the use of this item (e.g., battery electrolyte) require the provision of a Materials Safety Data Sheet in accordance with FED-STD-313 and packaging in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

3.3.2 Structural and bar steel. All structural and bar steel shall conform to ASTM A 36/A 36M, ASTM A 575, ASTM A 663, or ASTM A 108; composition and condition optional.

3.3.3 Sheet and strip steel. Sheet and strip steel shall conform to QQ-S-700, grades 1009, 1015, 1020 as applicable. Strips shall be cold rolled, temper no. 2; and sheets shall be cold rolled, or hot rolled and annealed.

3.3.4 Aluminum. Aluminum sheet and plates shall conform to QQ-A-250/11, temper T4. Structural and special shapes shall conform to QQ-A-200/9, temper T5.

3.3.5 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the lubricator may be newly fabricated from recovered materials to the maximum extent practicable, provided the lubricator produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the lubricator.

3.4 Environmental requirements.

3.4.1 Operating. The engine shall start and the lubricator shall operate as specified herein in any ambient temperature from +120 °F to -25 °F or to -40 °F when winterized (see 3.36).

3.4.2 Storage. The lubricator shall not be damaged by storage under the following conditions:

Air temperature:

High - plus 160 °F, time period, 4 hours daily.
Low - minus 65 °F, time period, 12 hours. No solar radiation.

3.5 Human factors engineering. The unit shall be designed in accordance with the accepted criteria for human factors as described in MIL-STD-1472. Special design emphasis shall be given to sections 4 (General Requirements), 5.1 (Control/Display Integration), 5.2 (Visual Displays), 5.4 (Controls), 5.5 (Labeling), 5.6 (Anthropometry), 5.9 (Design for Maintainer), and 5.13 (Hazards and Safety) of MIL-STD-1472, as applicable.

3.6 Reliability and maintainability. The "specified" mean-time-between-failure (MTBF) shall be 100 hours when the lubricator is tested as specified in 4.5.2.1.4. Each maintenance, assembly, or disassembly operation performed as a result of testing as specified in 4.5.2.1.4 shall be accomplished using common tools and special tools furnished with the lubricator. The ratio of

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

man-hours of maintenance required to hours of operation performed shall not exceed 0.15. A maintenance schedule shall be furnished prior to the start of any testing.

3.6.1 Maintenance support. All components and accessories shall be accessible for maintenance. Access opening shall be sized in accordance with 3.5. The repair, replacement and adjustment of components and accessories shall be accomplished by using common tools and with minimum drainage of and minimum disturbance to other components and accessories. Ease-of-maintenance provisions shall incorporate features to permit operation, maintenance, and service at extreme low temperatures by personnel wearing arctic mittens, bulky clothing, and bulky foot gear. Drain outlets shall be located for accessibility and shall permit complete drainage of fluids into a suitable container. Quick-connect plugs, receptacles, and multiple-line connectors shall be used in the electrical system; quick-connect couplings shall be provided in the pneumatic system. Quick-release hand operable fasteners shall be provided on cover plates that must be removed or opened for periodic adjustments. All cover plates and access covers shall be labeled to indicate the items accessed through them (see 3.5).

3.7 Dimensions. The overall dimensions of the lubricator, including skids, shall be not more than 96 inches in length by 46 inches in width by 60 inches in height.

3.8 Weight. The gross weight of the lubricator in operating condition, including accessories and lubricant container 3/4 full, shall not exceed 3175 pounds.

3.9 Roadability. When filled with appropriate lubricants and mounted on a trailer chassis conforming to MIL-C-52437, the lubricator shall withstand towing on paved roads, unimproved roads, and cross-country trails. The towing shall include abrupt stops and sharp turns. During or following towing, there shall be no damage or displacement of any component, accessory, part, or tool installed in or on the lubricator, nor shall there be any evidence of defective welded, bolted, or riveted connections on the lubricator.

3.10 Enclosure. An aluminum enclosure shall be provided to protect the lubricator components. Access doors shall be provided on both sides and on both ends. The enclosure shall be constructed as follows.

3.10.1 Base frame. A rectangular frame with rounded corners (2-inch radius minimum) shall be provided for the base of the enclosure consisting of two aluminum channel pieces bent in a U-shape and butt welded together to form one continuous member. The channel shall be 2- by 1-1/8-inch. The base frame shall not overhang the skid.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

3.10.2 Corner posts. The corner posts shall be rounded with a radius of not less than 2 inches, and shall be welded or riveted with solid rivets to the base frame and eave rails.

3.10.3 Eave rails. The eave rails shall be rounded with a radius of not less than 2 inches and shall be welded or riveted with solid rivets to the corner posts, vertical members, and roof members.

3.10.4 Vertical members. The vertical members shall be 2- by 1- by 3/32-inch aluminum channels, and shall be welded to the base frame and eave rails.

3.10.5 Roof members. The roof members shall be welded or riveted with solid rivets to the eave rails. The holes for the four lifting rings (see figure 1) shall be cut through the roof members.

3.10.6 Sheet. The sides, ends and roof panels shall be constructed of corrugated aluminum and shall be riveted to the corner posts, eave rails, vertical members, roof members, door frames, and base frame to form an integral component. The minimum nominal thickness of the aluminum sheet shall be .040-inch. An aluminum pocket to hold the technical publication shall be attached to the inside of the enclosure adjacent to a side door.

3.10.7 Doors. The side doors shall be constructed of corrugated aluminum and shall be reinforced with aluminum angles. The corrugations in the side doors shall form a continuous line with those in the rest of the enclosure when the doors are closed. Rigidity of the end doors shall be obtained through the use of angles and channel sections in the door members. Drip ledges shall be provided above all door openings. Each door shall be horizontally hinged in two equal sections. The upper section shall be attached to the enclosure by a hinge along its top edge, and the lower section shall be hinged to the top section. Hinges shall be the continuous (piano) type conforming to MS35827-1A. All hinges shall be fastened with solid rivets. The doors shall raise to permit full vertical opening; shall not interfere with the drip ledges over the doors; and shall be provided with devices to hold them in the full-open position. Devices which hold the doors in the open position shall be attached to both enclosure and doors by solid rivets with doubler plate under the skin or through frame members. All doors shall be provided with latches that can be operated by personnel wearing arctic mittens. The lower corners of each door section shall be fitted with recessed-type (flush-mounted) latches, located on the outside of the door panels to hold each section in the closed position (see figure 2).

3.10.8 Front and side doors. The bottom of the front (container end) door and of the side doors shall be not less than 22 inches above the bottom of the skids.

Source: https://assist.dla.mil -- Downloaded: 2026-04-17T13:43Z
Check the source to verify that this is the current version before use.

3.10.9 Rear door. The rear door shall be arranged so that only the nose-outlet panel, the accessory drawers, and the battery drawer are exposed when the lower section of the door is raised. Latches shall be provided to hold the lower section in the raised position.

3.10.10 Louvers. Louvers with interior shutters, operable from the outside, shall be provided in the top section of both the front and rear doors. The total open area of the louvers shall permit flow of air to operate the engine, compressor, and heater during warm-up operations, as specified herein.

3.10.11 Lifting provisions. The enclosure shall be provided with hand grasps for lifting the enclosure off the lubricator by two personnel.

3.10.12 Opening for fuel filler neck and cap assembly. An opening shall be provided to accommodate the fuel filler neck and cap assembly (see figure 2). Except when a diesel engine is specified (see 6.2), the fuel filler neck opening shall be labeled "AZ ONLY" per 3.5. When a diesel engine is specified (see 6.2), the label shall read "DIESEL ONLY".

3.11 Framework. The components of the lubricator shall be assembled on a welded-steel framework with includes a skid as shown on figure 5. A steel floor plate 1/8-inch thick shall be welded to the skid frame. A means shall be provided to limit lateral or longitudinal movement of the enclosure over the floor plate to 1/4-inch maximum.

3.12 Lubricant container. A lubricant container (see figure 3), consisting of a rectangular tank with three compartments, shall be located at the front of the unit. The center compartment shall have a capacity of not less than 23 gallons and the end compartments shall each have a capacity of not less than 27 gallons. The compartments shall be marked by permanently attached nameplates to identify the lubricant in each compartment. The lubricant container shall be constructed of steel having a minimum nominal thickness of 0.106-inch. Fill openings for each compartment shall be not less than 8 inches in diameter and shall be surrounded by a raised boss at least 3/4-inch in height which acts as a sealing surface for the cover gasket. Each opening shall be fitted with a watertight circular hinged cover. Each cover shall be equipped with a lever-operated type latch and fitted with a rubber gasket to seal on the raised box. The gasket material shall meet the requirements of MIL-R-3065 except that the rubber used shall conform to ASTM D 2000, M2BH610F17. The fill covers shall open at least 91 degrees and shall remain in an open position without holding devices. The compartment bottoms shall be inclined from the front on the two outer compartments, and from the front and sides for the center compartment. A heat reservoir surrounding the compartments shall be provided, and a separate bottom heat compartment for utilizing exhaust gases from engine and heater shall also be provided.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the currentversion before use.

Compartment cleanouts and heat reservoir exhaust shall be provided as shown on figure 1 and figure 3, and located to avoid the cross members of the trailer (see 3.37).

3.13 Lubricant pumps. An industrial-type, heavy duty, reciprocating, air-powered pump shall be installed in the top of each lubricant compartment. Each pump shall operate at an air pressure of 120 pounds per square inch gauge (psig) and shall withstand air pressures up to 200 psig. Each pump shall be furnished with an air-pressure regulator and an air-pressure gauge ranging from 0 to 200 psi. A manually operated valve for removing condensate from the air motor power head shall be included and shall be located to be operable through an open door. A manually operated valve shall be provided to permit recirculation of lubricant from the pump to the compartment. One master valve shall be furnished and installed to relieve the air pressure in all the pump lines. The lubricant discharge opening of the pump shall be threaded with 3/8-inch NPT. The weight of each pump with air-pressure regulator and gauge shall be not more than 75 pounds.

3.13.1 Grease pump. The grease pump shall have a pressure ratio of not less than 40 to 1, and shall be equipped with a priming piston located below the intake valve. A removable flat ring baffle, 5 inches outside diameter (OD), shall be attached to the riser tube 8 inches from the bottom. When assembled with the specified hose and control valve, using air pressure regulated to 120 psig and supplied with grease conforming to MIL-G-10924, the pump shall perform as required in table I.

3.13.2 Engine-oil and gear-lubricant pumps. Pumps for engine oil and gear lubricant shall have a pressure ratio of not less than 8 to 1 and shall be equipped with a ball-type foot valve. These two pumps shall be interchangeable. The pumps, assembled with the specified hose and control valve using air pressure regulated to 120 psig and supplied with oil conforming to MIL-L-46167 or MIL-L-2104 or gear lubricant conforming to MIL-L-2105, as applicable, shall perform as required in table I.

3.14 Adapter. One adapter shall be provided to permit use of the grease pump with 120-pound drums conforming to PPP-D-705, type III. A storage location shall be provided that will prevent damage to, or loss of, the adapter.

Source: https://assist.dla.mil -- Downloaded: 2026-04-17T13:43Z
Check the source to verify that this is the current version before use.

TABLE I. Performance requirements of pumps.

Pump	Temperature conditions			
	Minus 40 °F (winterized only)	Minus 25 °F	Plus 75 °F +10 °F	Plus 120 °F
Grease pump: output minimum	(a) 1 pound before cavitation (before heater output is directed to lubricant compartment). (b) 5 pounds within 5 minutes of continuous operation. (1 hour after heater output directed to the lubricant container.)	5 pounds within 5 minutes of continuous operation.	8.0 ounces in 10 pumping cycles.*	8.0 ounces in 10 pumping cycles.*
Static pressure, psig, minimum	4500	4500	4500	4500
Engine oil pump and gear lubricant output, minimum.	1 gallon within 1 minute, engine oil and 0.5 gallon within 1 minute, gear lubricant.	1 gallon within 1 minute, engine oil and 0.5 gallon within 1 minute, gear lubricant.	3.0 pints in 10 pumping cycles*	3.0 pints in 10 pumping cycles.*
Static pressure, psig, minimum.	300	300	300	300
Transfer pump: output, minimum	Pump shall operate.	Pump shall operate.	15 gallons within 1 minute.	15 gallons within 1 minute.

*A cycle shall consist of one upstroke and one downstroke.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

3.15 Transfer pump. One air-powered, reciprocating, transfer pump of not less than 1 to 1 ratio shall be included and fitted for use with 55-gallon oil drums conforming to PPP-D-729, type I. An extension, adapters, hose, and other accessories as needed shall be provided. The pump and accessories shall be stored within the lubricator housing. The pump shall pump gasoline, diesel fuel, engine oil, and gear lubricant. When using air at 120 psig and supplied with oil conforming to MIL-L-2104, grade 30, the pump shall perform as required in table I. The air inlet shall be equipped with a globe valve and a quick-disconnect coupling half conforming to MIL-C-4109, type II, size 1/4 inch. The fluid outlet shall be threaded with 3/4-inch NPT. The weight of the transfer pump and extension shall be not more than 25 pounds.

3.16 Air compressor. The air compressor shall be of the 2-cylinder, 2-stage, air-cooled type. Cooling fins shall be provided on the cylinder and cylinder heads to provide uniform cooling. The cylinder heads or cylinder assemblies, if head and cylinders are cast integral, shall be removable. The intake and exhaust valve shall be removable. The cooling fan shall be integral with the drive pulley.

3.16.1 Capacity. The air compressor shall have a free air capacity of 15 cubic feet per minute (CFM) at a rated discharge pressure of 175 psig. Maximum discharge pressure shall be 200 psig. The air compressor shall produce rated capacity for 500 hours at rated discharge pressure. Air compressor speed shall not exceed the manufacturer's recommended continuous operating speed.

3.16.2 Intercooler. An intercooler shall be provided to cool the air between the high- and low-pressure stages, and shall be located to receive the air blast from the drive pulley fan. The discharge air temperature, measured in the discharge to the air receiver, shall not exceed the ambient temperature +100 °F at a pressure of 175 ±10 psig.

3.16.3 Intake filter and muffler. The air compressor shall be furnished with a combination or separate intake filter and muffler. The filter shall be of the dry type, and shall remove dust and sand particles 50 microns nominal size and larger from the intake air.

3.16.4 Pressure regulation. An adjustable pressure-actuated mechanical control shall be provided to stop the compression of air when the receiver tank pressure has reached 175 psig ±10 psig, and shall start the compression of air when the tank pressure has dropped to 140 psig ±10 psig. An automatic unloading device shall be provided to protect the engine from starting against either tank pressure or compression in the compressor cylinders. A spring-loaded pressure relief valve shall be installed between the high- and low-pressure stages to protect the low-pressure cylinder in the event of failure of the high-pressure cylinder valves.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T13:43Z
Check the source to verify that this is the currentversion before use.

3.16.5 Air-receiver tank. The air-receiver tank shall be of the horizontal type and shall be constructed in accordance with the ASME Boiler and Pressure Vessel Code Section VIII. The receiver tank shall have a capacity of 30 gallons and shall be fitted with an adjustable, spring-loaded, pressure-relief valve, a female NPT globe-type 250 psig discharge valve and drain valve, and an air line to a 0 to 250 psig range pressure gauge. The pressure gauge shall be located in the control and instrument panel (see 3.18.6). The relief valve shall be set at 200 psig, and shall be capable of relieving the capacity of the air compressor. The takeoff point to the 1/2-inch discharge valve shall be located on the top or side of the tank, while the takeoff point for the 1/4-inch drain valve shall be located on the bottom of the tank. The drain valve shall be located at the rear of the lubricator properly supported in the panel below the hose reels and shall completely drain the tank of all moisture.

3.16.6 Drive. The air compressor shall be driven by the engine specified herein through matched multiple V-belts and pulleys on the engine and air compressor. V-belt drives shall be in accordance with the RMA Engineering Standards for Multiple V-Belt Drives.

3.16.7 Mounting. The air compressor and engine assembly shall be tank-mounted. Mounting brackets for the engine and air compressor shall be welded to the receiver tank. Bolts of 1/2-inch minimum diameter with double lock washers shall be used to mount the tank assembly to the skid frame.

3.17 Alcohol injector. The main air line to the lubricant pumps shall be provided with an automatic alcohol injector having a metal bowl of not less than 8-fluid-ounce capacity. The control valve on the injector shall regulate the flow so that in 45 minutes of lubricating operations not more than one bowl full of alcohol shall be dispensed. Instructions for setting the control valve so the device dispenses 9 fluid ounces per hour for varying conditions of operation shall be set forth in the operator's manual and indicated on the dispenser. The fill cap or plug shall be operable by personnel wearing arctic mittens, and shall be attached to the dispenser by sash chain.

3.18 Gasoline engine. The engine, including all systems, components, and auxiliaries, shall conform to MIL-STD-1410 air cooled, 4-cycle, except as specified in 3.18.2. When specified (see 6.2), the engine shall be a manufacturer's standard air-cooled, diesel engine of equal capacity. The diesel engine shall be electric and hand cranked.

3.18.1 Power and speed rating. The power and speed rating of the engine shall be such that operation of the lubricator under all conditions specified herein shall not require horsepower in excess of the continuous horsepower of the engine for the applicable governed speed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

3.18.2 Government-furnished engine. When specified (see 3.38 and 6.2), a 6-hp military standard engine, model 4-A032 shall be furnished by the Government and shall be installed by the contractor in accordance with installation instructions provided in MIL-STD-1300.

3.18.3 Fuel tank. A fuel tank of not less than 10-gallon capacity shall be provided. The tank shall be in accordance with MIL-T-46786, type I, except that the fuel filler neck and cap assembly shall be as specified in 3.18.3.1. The tank shall be equipped with a drain line to completely drain the tank to the outside of the enclosure and into a suitable container. A liquid-quantity fuel transmitter conforming to MS500040 shall be furnished and installed. The transmitter shall be compatible with the fuel tank and the liquid-quantity fuel indicator (see 3.18.6).

3.18.3.1 Fuel filler neck and cap assembly. A fuel filler neck and cap assembly shall permit filling and venting the fuel tank from outside the enclosure (see figure 2). The assembly shall consist of a chain secured vented cap, fuel strainer, a gasket, and a filler neck. The filler neck shall be attached and grounded to the fuel tank by a flexible connection to permit removal of the filler neck and cap assembly from the enclosure without disconnecting from the tank.

3.18.4 Engine-exhaust system. The engine-exhaust system shall be made of insulated flexible tubing, rigid tubing, and a diverter. The insulation shall not peel, flake, crack, or otherwise break loose from the exhaust lines. The diverter shall deflect the exhaust gases either into the bottom heat chamber of the lubricant compartment (see figure 3) or through the floor of the lubricator (see figure 1) into the atmosphere between the skids. The opening for the discharge to the atmosphere shall be located between the crossmembers of the trailer chassis (see figure 4). The tubing shall be of high temperature (aluminized) steel conforming to ASTM A 463, type 1, or stainless steel conforming to ASTM A 268. Flexible tubing shall be used where necessary to facilitate installation and maintenance. The back pressure of the exhaust system shall not exceed 8 inches of water at any load up to the net continuous horsepower output and speed under all operating conditions specified herein.

3.18.5 Cranking system. Both manual and electric cranking systems conforming to MIL-STD-1410 shall be provided. The manual starting system shall be accessible for starting the engine through the access door. The force required by the operator to manually crank the engine shall not exceed the limits specified in MIL-STD-1472, 5.9.11.4 (see 3.5).

3.18.5.1 Charging alternator. The battery-charging alternator shall be of a 5-ampere rating and equipped with a voltage and current regulator.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

3.18.5.2 Batteries. Two storage batteries conforming to MS35000-1, type 2HN shall be provided. The batteries shall be connected in series to provide 24 volts. The batteries shall be furnished charged and dry with a separately packaged filling of electrolyte for each unit.

3.18.5.3 Battery drawer. A metal battery drawer shall be provided and located under the hose-reel bank to hold the storage batteries. The drawer shall incorporate provisions for gas venting, drainage, rigid battery support on nonconductive shims, corrosion-resistant battery hold down devices, polychloroprene pans, and access to battery cells and terminals from the rear of the lubricator. Shims and spacers shall not interfere with the free circulation of air between batteries and drawer. Shims shall be attached to the drawer bottom with machine screws, or bolts with nuts and lock washers. A device shall be provided to automatically secure the drawer in place when it is closed. The drawer with batteries and cables installed shall require not more than 40-pound force to slide it in or out. A stop shall be provided to limit outward travel of the drawer. A pictorial battery connection diagram shall be provided and shall be readable by the maintainer doing battery maintenance.

3.18.5.4 Battery cable and terminals. The battery cables shall conform to MIL-C-13486, type I, class A. The battery terminals shall conform to MIL-STD-1410. The positive battery cable shall be colored red and labeled "+" at the terminal end. The negative cable shall be colored black and labeled "-" at the terminal end. The cables shall be of sufficient length to permit the battery drawer to be pulled out and the batteries serviced without disconnecting the cables. The battery terminals shall be provided with guards to prevent accidental shorting.

3.18.6 Control and instrument panel. A control and instrument panel shall be provided and mounted so as to be accessible through the side door adjacent to the engine. The panel shall include a starter switch, choke control, manual throttle control, ignition switch, and the following instruments:

a. Battery-generator indicating ammeter and shunt, with zero center scale, conforming to MIL-M-10304.
b. Engine-oil-pressure indicator conforming to MS24541. The oil-pressure transmitter shall conform to MS24538. These items are not to be furnished when normal oil pressure is below 15 psi.
c. Engine-fuel-liquid indicator conforming to MS24544.
d. Air receiver pressure gauge, 0 to 250 psig range, with increments no greater than 10 psi.

Each instrument shall be wired to operate only when the ignition switch is in the "on" position. Each instrument and control device shall be permanently and legibly marked in accordance with 3.5, on plates conforming to MIL-P-514,

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

type III, composition C, of type I, grade A, class 1 material to indicate its proper function. Not less than two panel lights with an on-off switch shall be provided to illuminate all controls and instruments. Panel illumination shall conform to 3.5.

3.18.7 Safety devices. Safety devices of the emergency shutdown type shall be provided for high oil temperature and low oil pressure. A combination ignition-start switch which incorporates the aforementioned pressure temperature safety devices may be used in lieu of four separate switches. Safety switches shall be set in accordance with MIL-E-46717 or MIL-STD-1410 as applicable. Low oil pressure safety requirements do not apply when the normal oil pressure is below 15 psi.

3.18.8 Automatic idle device. The engine shall be provided with an automatic control to reduce the engine speed to the recommended idle speed during compressor unload period. Means shall be provided to render this device inoperative and allow the engine to operate at governed speed during unload period.

3.19 Hose reels. Five reels shall be included and mounted in a reel bank at the rear of the lubricator and shall be accessible through the rear door. All reels shall have an outside diameter of not less than 23 inches. The reels shall accommodate the hose assemblies specified when the hose is reeled in without benefit of guiding. Each reel stand shall be equipped with a brake or locking device to hold the reel in rigid position when not in use. Reel shafts and connections shall have packing to prevent leakage other than that leakage required for lubrication of the reel. Elbow unions shall be provided at the inlet side of the shaft and discharge side of the reel to facilitate hose removal. Openings fitted with rollers to guide each hose shall be provided in a panel below the reels. When viewed from the rear and starting from the left, the hose outlet panel openings shall be marked as follows: Gear lubricant, Grease-GAA; Air, Grease-GAA; and Engine Oil.

3.20 Control valves. Each reel-mounted lubricant hose shall be equipped with a control valve assembled to its discharge end. Control valves for grease shall conform to MIL-L-4387, type VI, class 1, style A with coupler with ball-check valve, and shall be connected to the hose by means of a high-pressure universal swivel conforming to MIL-L-4387, type VII, class 3. Control valves for gear lubricant and engine oil shall conform to MIL-L-4387, type VI, class 2, style A, for gear lubricant and type VI, class 2, style b, for engine oil and shall be connected to the hose by a straight swivel (see 3.24). When not in use, the control valves shall be secured between the hose reels without restricting retention of the reels and shall permit removal access, and positive rotation of the hose. All valves shall be labeled as to

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

function (i.e. "GREASE", "OIL", "GEAR LUBE"). Valves shall be provided with double-ended arrows showing the direction of operations and labeled at each end to indicate the functional result (i.e. "OPEN", "CLOSE") (see 3.5).

3.21 Hose. All hose shall be clamped or located to prevent damage to the hose. Steel piping may be used in long runs to reduce the length of hose required, provided that a hose attaches to each end of the pipe. All rubber hoses shall be no more than 1 year old when accepted by the Government.

3.21.1 Lubricant hose. All lubricant hose shall be provided in assemblies conforming to MIL-H-3868, type I, style 3, grade A, 3/8-inch inside diameter (ID). The hose assemblies shall be fitted with reusable couplings, male on one end and female swivel on the other, 3/8-inch NPTF. The hose on each of the two grease reels shall be made up of one assembly each, 40 feet long. The hose on the other two lubricant reels shall be made up of one assembly each, 30 feet long.

3.21.2 Air hose and fuel hose assemblies. All air hose and fuel hose shall conform to MIL-H-13444, type I. The hose assemblies shall be fitted with reusable couplings, male on one end and swivel female on the other end. The air hose on the reel shall be made up of one assembly, 50 feet long. The hose shall be size 1/4-inch ID, with 1/4-inch NPTF couplings. The free end of the hose shall be fitted with a quick-disconnect socket conforming to MIL-C-4109, type I, style 2, size 1/4-inch, and shall be fitted with a hose stop 4 inches from the end. A 10-foot assembly with cap and plug shall be furnished as a repair hose. Fuel-hose assemblies shall be size 1/4-inch with 1/4-inch NPTF couplings. The air-hose assembly from the air receiver to the lubricant pumps shall be size 3/8-inch fitted with 3/8-inch couplings.

3.21.3 Transfer pump discharge hose assembly. A hose assembly conforming to MIL-H-13444, type I, size 3/4-inch shall be furnished for use with the transfer pump. The hose shall be fitted on one end with a brass 3/4-inch NPT male coupling with a protective cap secured by a corrosion-resistant metal cord. The other end shall terminate in a 9-inch-long, brass, 30 degree nozzle with a rubber cap secured by a corrosion-resistant metal cord. The hose shall be not less than 10 feet long.

3.22 Wiring. All electrical wires and cables shall conform to MIL-C-13486, type I or type II, as required, provided it meets the electromagnetic interference requirements. All wiring shall be identified by a number-tracing system. Each wire shall have a durable tag bearing the circuit number attached to the wire insulation at each point of electrical connection. An electrical outlet shall be provided for the trouble light (see 3.24). The receptacle shall be labeled as to voltage and current (i.e. "24 VDC 25A") (see 3.5).

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

3.23 Accessory drawers. Two accessory drawers shall be located directly under the hose-reel bank. One Government-furnished padlock (see 3.38) for fastening both drawers shall be attached with a chain to one accessory drawer. The accessory drawers shall house accessories and repair parts as specified in 3.24. A stop shall be provided to limit outward travel of each drawer. One drawer shall have a removable, compartmented tray with a hinged cover.

3.24 Accessories. The following accessories and parts shall be provided with each lubricator and, with the exceptions specified, shall be stored in the accessory drawers by use of clips. Small repair parts shall be stored in the removable tray.

Accessories.

Item	Quantity	Description
1	2	Adapter, flexible extension, locking sleeve on one end and hydraulic coupling on the other conforming to MIL-L-4387, type IV, class 1, style B, except that the hose shall conform to MIL-H-3868, type I, style I, grade A, size 1/4-inch, and the hydraulic coupling shall be size 2 without ball-check valve.
2	1	Adapter, flexible extension as above except the hydraulic coupling shall be replaced with a large button-head coupling conforming to MIL-L-4387, type I, class 3. The large button-head coupling shall be without check valve and fitted with a 500 psig pressure-relief valve.
3	1	Adapter, flexible extension as above except the large button-head coupling shall be replaced with a standard button-head coupling conforming to MIL-L-4387, type I, class 3, style B, size 1, and fitted with a 500 psig pressure-relief valve without check valve.
4	1	Adapter, rigid, with relief, consisting of a hydraulic coupling conforming to MIL-L-4387, type I, class 1, style A, size 2, a locking sleeve conforming to MIL-L-4387, type II, a 500 psig pressure-relief valve and inter-connecting short nipples of 1/8-inch extra heavy pipe.
5	1	Adapter, rigid, swivel coupling, conforming to MIL-L-4387, type IV, class 1, style A. The hydraulic coupling shall be without ball-check valve.
6	1	Air blow gun, conforming to GGG-G-770, type II, class 2, style A, size 1/4-inch NPT, and quick-disconnect coupling half, conforming to MIL-C-4109, type II, style 1, size 1/4-inch, shall be installed in the inlet port.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

Accessories (continued).

Item	Quantity	Description
7	1	Fluid suction gun, plunger-operated, conforming to A-A-50477, class C, style 4, 11-ounce capacity.
8	1	Grease gun, hand, lever-operated, conforming to MIL-G-3859, type I, 14-ounce capacity, unless otherwise specified (see 6.2).
9	1	Hacksaw frame, conforming to GGG-F-671, type I, class I, style B, 10- to 12-inch capacity.
10	2	Hacksaw blade, conforming to GGG-B-451, type I, grade A, class 2, 10-inch length, 24 teeth per inch.
11	3	Lubrication fitting, giant button head, 1/8-inch NPT.
12	3	Lubrication fitting, giant button head, 1/4-inch NPT.
13	3	Lubrication fitting, giant button head, 3/8-inch NPT.
14	3	Lubrication fitting, standard button head, 1/8-inch NPT.
15	3	Lubrication fitting, standard button head, 1/4-inch NPT.
16	3	Lubrication fitting, standard button head, 3/8-inch NPT.
17	6	Lubrication fitting, hydraulic, straight, 1/8-inch NPT, conforming to MIL-F-3541, type III.
18	6	Lubrication fitting, hydraulic, 45 degrees, 1/8-inch NPT conforming to MIL-F-3541, type III.
19	6	Lubrication fitting, hydraulic, straight, 1/4-28 taper threads, conforming to MIL-F-3541, type I.
20	6	Lubrication fitting, hydraulic, 45 degrees, 1/4-28 taper threads, conforming to MIL-F-3541, type I.
21	1	Lubrication fitting tool, 3 in 1, consisting of tap, wrench, and easy-out, size 1/8-inch NPT.
22	1	Lubrication fitting tool, 3 in 1, consisting of tap, wrench, and easy-out, size 1/4-28 taper threads.
23	1	Lubricator, portable, with harness for mounting on back, 5-pound grease capacity, 3500 psig delivered pressure, 40 psig permanent air charge. This portable lubricator shall be mounted in the enclosure.
24	1	Oil spray gun, air-operated, 1-quart capacity, with quick-disconnect coupling half conforming to MIL-C-4109, type II, style 1, size 1/4 inch.
25	1	Oiler, hand, pump feed, 1/2-pint capacity, 6-inch rigid bent spout, conforming to A-A-50477, class B.
26	3	Plugs, to replace 500 psig pressure-relief valve specified above.
27	1	Quick-disconnect coupling half (socket end with valve), conforming to MIL-C-4109, type I, style 2, size 1/4-inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

Accessories (continued).

Item	Quantity	Description
28	3	Quick-disconnect coupling half (plug end straight through), conforming to MIL-C-4109, type II, style 1, size 1/4-inch.
29	6	Reusable coupling, male, 3/8-inch NPTF, to repair lubricant hose.
30	6	Reusable coupling, female swivel, 3/8-inch NPTF, to repair lubricant hose.
31	3	Reusable coupling, male, 1/4-inch NPTF, to repair air hose.
32	3	Reusable coupling, female swivel, 1/4-inch NPTF, to repair air hose.
33	1	Swivel, straight, 360 degrees, conforming to MIL-L-4387, type VII, class 1, style A or B (as used on oil control valves).
34	1	Swivel, "Z", 360 degrees, conforming to MIL-L-4387, type VII, class 3. (As used on grease control valves.)
35	1	Tire, inflator and pressure gauge, chucks for standard and large-bore tire valves chained to gauge, conforming to GG-G-91, type III, style 3, except that the hose shall be as specified herein and a quick-disconnect coupling half shall be attached to the air inlet of the gauge. All quick-disconnect couplings shall conform to MIL-C-4109; the plugs shall be type II, style 1, size 1/4-inch NPT while the socket shall be type I, style 2, size 1/4-inch NPT.
36	1	Trouble light, 24-volt DC, 30-foot cord with retractable reel, mounted by the contractor inside the enclosure adjacent to one of the side doors.
37	1	Kit, mounting hardware, for skid mounted units only (see 3.37 and figure 4).
38	1	Bung wrench.

3.25 Electromagnetic interference. Unless otherwise specified (see 6.2), the electromagnetic interference emission and susceptibility characteristics of the lubricator shall conform to MIL-STD-461, tactical and special purpose vehicles and engine driven equipment.

3.26 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating. A chart listing lubrication points and quantity, type and frequency of lubrication shall be provided near the control panel (see 3.5).

3.26.1 Lubricants. The lubricator shall operate as specified herein when lubricated with military lubricants.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

3.26.2 Lubrication fittings. Lubrication fittings shall conform to MIL-F-3541, type I, II, or III. Fittings shall be located in a protected position. Fittings shall be accessible to a grease gun conforming to MIL-G-3859. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts.

3.26.3 Pressure-release device. A pressure-release device shall be provided where the use of 1000 psi and higher pressure lubricating equipment will damage grease seals or other parts.

3.26.4 Enclosures with integral reservoir of lubricant. Enclosures such as gear cases and transmission housings, which contain a reservoir of lubricants for the lubrication of the parts enclosed, shall be equipped with dipsticks, finger holes, or sight holes to determine the level of the lubricant. Each enclosure shall be equipped with a magnetic drain plug conforming to MS35844 or MS49006 and a means for filling the enclosure with lubricant. The drain plug shall be located so that removal of the plug results in complete drainage of the lubricant from the enclosure. Drainage shall be to a drain pan placed on the ground when the lubricator is in its operating position. Integral tubes or troughs may be used to convey the lubricant from the drain to the drain pan. Accessibility to the drain plug, the filling means, and the lubricant-level checking device shall be provided without the removal or adjustment of accessories or parts.

3.26.5 Grease lubrication. All components except those for which preservatives are specified in 5.1 shall be lubricated. All grease lubrication of sealed bearings shall be with grease as follows:

a. MIL-G-23827 - For instruments, all sealed bearings, and other bearings where operating temperatures do not exceed 250 °F.
b. MIL-G-10924 - For bearings where operating temperatures do not exceed 175 °F.

The lubricator shall be assembled, tested, and delivered with these greases. The bearings shall be cleaned before lubrication, because military greases are not always compatible with other greases. The lubricated component shall be tagged in a conspicuous place to indicate which military grease has been used.

3.26.6 Oil lubrication. Unless otherwise specified, (see 6.2) all components shall be filled to the operating level with military oils designated for use in the temperature range at the shipping destination. A tag shall be attached in a conspicuous place to indicate the temperature range and grade of oil used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

3.27 Fungus and moisture resistance. Unless otherwise specified (see 6.2), the electrical circuitry, including all components and connections except as specified below, shall be protected from the effects of fungus growth and moisture by an overall treatment with a varnish conforming to MIL-V-173, composition I with 1 percent copper 8-quinolinolate or 7 percent salicylanilide (by weight) based on the nonvolatile content of the varnish.

a. Components or circuit elements that are inherently fungus and moisture resistant or which are hermetically sealed need not be treated.
b. Components or circuit elements whose functions will be adversely affected by the varnish coating shall not be treated.

When used, the varnish shall be applied by spray, brush, or a combination of both to give a minimum dry-film thickness of 1 mil to component or element surfaces previously cleaned and prepared so that the surfaces are free from all foreign matter which would interfere with the adherence or function of the varnish.

3.28 Fire extinguisher. A fire extinguisher with bracket shall be furnished by the Government (see 3.38). The fire extinguisher shall be mounted by the contractor inside the front enclosure door near the lubricant containers when the lubricator is not trailer mounted. When trailer mounted, the fire extinguisher shall be mounted on the forward side of the trailer baffle plate.

3.29 Lifting devices. The lubricator shall be provided with four lifting rings, four sockets, two inverted U-shaped members, and cross members as required as shown in figure 1. The four lifting rings shall be in accordance with MIL-STD-209, class 1, type IV and shall be attached through the top of the aluminum enclosure to permit lifting of the lubricator. Each lifting ring shall be not less than 3 inches ID. Each lifting device shall withstand, without damage to any part of the lubricator, a static load of 2-1/2 times the load imposed upon it when the lubricator, filled for operation, is lifted. The rings shall be detachable so that the lubricator may be hoisted with the enclosure removed. The base of each ring shall also serve as the mechanism for fastening the enclosure to the lubricator. Means shall be provided to seal the openings in the top of the enclosure when the lifting devices are in place. Each lift point shall be labeled "LIFT HERE" in 0.75-inch (±0.125) characters (see 3.5).

3.30 Tiedown devices. Four tiedown rings, in accordance with MIL-STD-209, class 2, type IV, shall be provided as shown in figure 5 and shall withstand the pull test specified in MIL-STD-209 without weld failure, permanent deformation, cracking, loosening or breaking of the provision or its connecting structural components. Each tiedown point shall be labeled "TIEDOWN HERE" in 0.75-inch (±0.125) characters (see 3.5).

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

3.31 Identification marking. The lubricator shall be identified in accordance with MIL-STD-130. The marking shall be applied to the lubricator on plates conforming to MIL-P-514, type I, style 1, composition C, of type I, grade A, class 1 material. Plates shall be attached by machine screws, bolts, or rivets in a conspicuous protected location.

3.32 Shipping-data plate. Shipping-data plates shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material, and in addition, shall show the silhouette of the lubricator in transport position indicating the center of gravity and the location and capacity of the lifting and tiedown attachments. The plates shall be attached by machine screws, bolts, or rivets in a conspicuous protected location.

3.33 Instruction plates. Each lubricator shall be equipped with instruction plates or diagrams, including warnings and cautions, describing any special or important procedures to be followed in assembling, operating, or servicing the lubricator. Instruction plates shall conform to MIL-P-514, type III, composition C, of type I, grade A, class 1 material. Plates shall be attached by machine screws, bolts, or rivets in a conspicuous protected location.

3.34 Treatment and painting. All parts of the lubricator normally painted in commercial practice shall be cleaned, treated, and painted in accordance with MIL-T-704, type F or G as applicable. The interior of the doors and the complete exterior of the enclosure shall be painted. Unless otherwise specified (see 6.2), the final top coat shall be green no. 383 conforming to MIL-C-46168.

3.34.1 Lubricant container interior. The interior of the lubricant container shall be treated in accordance with MIL-T-704 and shall be coated with epoxy conforming to MIL-C-4556, color white.

3.34.2 Battery drawer. The interior surfaces of the storage-battery drawer shall be treated in accordance with MIL-T-704 and coated with epoxy conforming to MIL-C-4556, color white.

3.35 Toolbox and miscellaneous-equipment box. The lubricator shall be provided with a waterproof toolbox made of 0.071-inch minimum nominal thickness metal. The toolbox shall be fastened to the lubricator. The toolbox shall have a capacity of not less than 2-1/2 cubic feet and shall have a hinged lid and hasp to fit the Government-furnished padlock (see 3.38). The hasp shall be of a type that will keep the lid closed when subjected to vibration. The padlock shall be secured to the toolbox with a chain. The toolbox shall have a removable tray. The removable tray shall have not less

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

than four compartments and hinged cover. The repair air hose and the transfer pump discharge hose shall be stored in the toolbox. The toolbox shall be provided with adequate openings to fully drain the box interior.

3.36 Winterization. When specified (see 6.2), the lubricator shall be winterized. The winterized lubricator shall contain the following additional components.

3.36.1 Clutch. The engine shall be equipped with a clutch. The clutch shall be accessible for lubrication, adjustment, and replacement of parts. When sealed or lubricated-for-life bearings are employed, lubricants utilized shall permit operation under the range of ambient temperature conditions specified herein. Adjustment of the clutch shall be accomplished with common tools. The clutch shall have a torque rating of not less than 150 percent of the maximum engine torque. The clutch operating lever shall be accessible from the engine control panel. The clutch facing shall not contain asbestos.

3.36.2 Space heater. One or more 24-volt, fuel-burning heaters conforming to MIL-H-62315, shall be provided as necessary to meet the requirements of 3.36.6. When a diesel engine is specified (see 6.2), the heater shall be supplied with fuel from the engine fuel tank. Controls shall include an "on-off" switch and a "high-low" heat selector switch or a switch combining both of the foregoing functions. A thermostat shall be provided to regulate the heater output for the high position of the heat selector switch. The high setting on the thermostat shall produce a temperature of not less than 125 °F as measured at the hot air duct discharge to the engine crankcase, at an ambient temperature of -40 °F.

3.36.3 Heater fuel pump. A 24-volt, piston-type, electric fuel pump shall be provided. The pump shall require not more than 10 watts power and shall develop shutoff pressure within the range of 4.5 to 5.5 psig. A 5- to 10-micron fuel filter shall be provided.

3.36.4 Sliding heater assembly. The heater, its control box, the thermostat, heater fuel pump, and fuel filter, all provided with quick disconnects, shall be mounted on a removable, sliding frame located not less than 25 inches above the bottom of the skids. The assembly shall be rigidly mounted and shall be retained by a quick-release device. The quick-disconnect couplings in the fuel lines from the fuel tank to the heater fuel pump shall be fitted with handles for operation by personnel wearing arctic mittens. The assembly shall be removable through one of the enclosure doors. One soldier wearing arctic clothing, including arctic mittens, shall disconnect and remove this assembly at -40 °F within 2 minutes. The assembly shall be replaced and reconnected under the same conditions in the same length of time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

3.36.5 Heater exhaust. The heater exhaust shall be made of stainless steel, ASTM A 268, or insulated rigid and flexible high temperature aluminized steel tubing. The aluminum coating shall conform to ASTM A 463, type 1. The heater shall exhaust into the bottom heat chamber of the lubricant container. The exhaust lines shall have smooth turns. There shall be no passages which cannot be cleaned or drained. The exhaust shall be provided with a quick-release device and shall not interfere with the removal or replacement of the heater assembly of the enclosure.

3.36.6 Hot-air ducts. The heater shall be connected to the hot-air ducting by a sliding connection that shall not interfere with the removal or replacement of the sliding heater assembly. Ducts and deflectors with controls shall be provided to direct the heated air to the engine, the lubricant containers, battery, and air compressor.

3.36.6.1 Engine duct. A heat duct shall be provided to conduct heated air to the engine crankcase and the engine cooling air intake. This duct shall not interfere with the manual cranking of the engine or with the normal servicing operations. The heated air shall raise the temperature of the engine oil from -40 °F to -25 °F within 45 minutes from the time the heater is started.

3.36.6.2 Battery-container duct. An insulated duct shall be provided to direct a portion of the heated air to the battery container. The heated air shall enter near the bottom of the batteries and shall raise the battery electrolyte temperature from -40 °F to -25 °F within 45 minutes from the time the heater is started. The amount of heat supplied to the batteries shall be automatically regulated to prevent thermal damage to the cases and to limit battery electrolyte temperature to not more than +120 °F.

3.36.6.3 Lubricant-container duct. A heat duct shall be provided to conduct the heated air from the space heater to the heat compartment around the lubricant containers (see 3.12).

3.36.6.4 Compressor duct. A heat duct shall be provided to conduct heated air to the air compressor crankcase. The duct shall not interfere with the normal servicing operations of the air compressor.

3.36.7 Charging alternator. In lieu of the charging alternator specified in 3.18.5.1, an 18-ampere alternator, equipped with a voltage and current regulator, shall be provided.

3.36.8 Operational requirements. At temperatures from -25 °F to -40 °F, the lubricator shall start and dispense lubricants as specified in 3.13.1, 3.13.2, and 3.15 within 60 minutes.

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:43Z
Check the source to verify that this is the currenversion before use.

3.36.9 Batteries. In lieu of the batteries specified in 3.18.5.2, two storage batteries conforming to MS35000-3, type 6TN, shall be provided for the winterized lubricator.

3.37 Trailer mounting. When specified (see 6.2) the contractor shall mount the lubricator on a trailer chassis. The trailer chassis shall be furnished by the contractor, or shall be furnished by the Government, as specified (see 3.38 and 6.2). The trailer chassis shall conform to MIL-C-52437 with the optional front platform and with the optional springs for a 4000 pound payload. When lubricators are furnished unmounted, the contractor shall furnish the mounting instructions and a kit that includes all the hardware required for mounting. The mounting details shall be as shown in figure 4.

3.38 Government-furnished property. The following property in the quantities indicated shall be furnished by the Government (see 6.3):

Item no.	Description	Identification	Quantity for each unit
1	Extinguisher, fire, dry chemical conforming to A-A-393.	NSN 4210-00-889-2221	1
2	Padlocks	MIL-P-17802, style A, class 2, size 1-3/4 in. w/chain & clevis in keyed-alike padlock sets.	2
3	Trailer chassis, 2-wheel, 2-1/2-ton, MIL-C-52437 (when specified [see 3.39 and 6.2])	NSN 2330-00-897-9002	1
4	Engine, gasoline, military standard 6-hp, mdl 4-A032 (when specified [see 3.18.2 and 6.2]).	NSN 2805-00-068-7512	1
5	Decontaminating apparatus, M13	NSN 4230-01-133-4124	1

3.39 Government-loaned property. When specified, a trailer chassis, 2-wheel, 2-1/2 ton, conforming to MIL-C-52437 shall be loaned by the Government (see 6.4).

3.40 Workmanship. The lubricator shall be free from defects such as particle penetration, undersize and nonuniformly configurated welds, rust, cracks, and other defects that could impair the operation or serviceability of the lubricator. All components shall be clean and free from extraneous material, sand, dirt, pits, scale and flux.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

3.40.1 Fabrication. Metal used in the fabrication of the lubricator shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the metal. Corners shall be square and true. Flame-cutting of steel may be employed instead of shearing or sawing. Burned surfaces of flame-cut steel shall be ground or machined sufficiently to remove ash and cooling checks. All burrs and rough edges shall be removed. Precautions shall be taken to avoid overheating, and heated metals shall be allowed to cool slowly. All bends of a major character shall be made with metal dies or fixtures in order to insure uniformity of size and shape. All tubing and pipe bends shall be made with forming tools to retain a circular cross section throughout the bend.

3.40.2 Bolted connections. Washers, lockwashers, or self locking nuts shall be provided, and all bolts, nuts, and screws shall be tight. Bolts and screws shall not extend more than three full threads beyond the nut. Each serrated lockwasher shall be attached to its bolt or screw.

3.40.3 Riveted connections. Rivets shall completely fill the holes. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, in full contact with the surface of the member, and shall be in accordance with SAE J492.

3.40.4 Bolt holes and rivet holes. All bolt and rivet holes shall be made by any one of the following methods:

a. Holes may be subpunched or subdrilled undersize and reamed to finished size upon assembly.
b. Holes may be drilled to size at assembly.
c. Holes may be made to size prior to assembly by drilling with accurately mated steel drilling jigs or by punching on accurately setup gang punches, when practicable. The jigs shall be equipped with hardened steel bushings to insure the proper alignment and location of the holes. All burrs and rough edges shall be removed from the holes prior to final assembly.
d. Install all permanent fasteners wet with MIL-S-81733 or MIL-P-23377.

3.40.5 Welders and welding.

3.40.5.1 Welders. Before assigning any welder or welding operator to welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder or welding operator has passed qualification tests as prescribed by either of the following listed codes for the type of welding operation to be performed and that such qualification is effective as defined by the particular code:

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

AWS D1.1, AWS D1.2, and American Society of Mechanical Engineers

In the event of evidence of poor welds, the Government reserves the right to require retesting of any welder or welding operator. The test results shall be made available for review by the contracting officer or the contracting officer's representative.

3.40.5.2 Welding. The portions of surface that are to receive welds shall be cleaned thoroughly of all foreign matter including paint film for a distance of 2 inches (50.8 mm) from each side of the outside line of welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Welding and welds shall be in accordance with ASME or AWS Code.

3.41 Noise limits. The noise produced by the lube and service unit shall conform with MIL-STD-1474 requirements, with the exception of MIL-STD-1474, 5.2, 5.3, and 5.4, when tested in accordance with 4.5.2.1.10. The provisions of MIL-STD-1474, 5.1.1.3.2 procedures have been pursued and documented to the satisfaction of the contracting activity and written permission to exceed the 85 Db(A) limit is obtained from the contracting activity. Hazard signs shall comply with MIL-STD-1474, 4.2.

3.42 Decontaminating kit. The decontaminating kit, as specified on Drawing 13228E2593, for mounting the M13 Decontaminating Apparatus, shall be installed as specified on Drawing 13228E2594.

3.43 Safety. All belts, gears, shafts, pulleys, chains, and other reciprocating, rotating, or moving parts of equipment shall be guarded when such parts are exposed to contact by personnel or otherwise create a hazard. All hot surfaces of equipment, including exhaust pipes and other lines which may be subject to high temperatures, exposed to contact by personnel, or which create a fire hazard shall be fully guarded or insulated. Fuel tanks shall be located in a manner which will not allow spills or overflows to run onto engine, exhaust, or electrical equipment. All points requiring lubrication during operation shall have fittings located or guarded so as to be accessible without hazardous exposure to personnel performing these operations. Nonfunctional sharp edges, projecting points, and excessive length of fastening devices shall be avoided.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards and as specified herein.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection comparison (see 4.6).
d. Inspection of packaging (see 4.7).

4.3 First article inspection. When specified (see 3.2), a first article lubricator(s) shall be examined as specified in 4.5.1 and tested as specified in 4.5.2 to determine conformance to the requirements of this specification. Prior to the examination or test the lubricator shall be completely lubricated with military oils and greases. Oils shall be those designated for use in the ambient temperature at which the test is being performed. During all first article tests, the engine shall be governed at a speed not greater than the highest continuous speed at which it qualified. Acceptance of a first article lubricator shall not exclude the remaining lubricators from the quality conformance inspection and acceptance provisions specified in section 4.

4.3.1 Examination. The lubricator shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

4.3.2.1 Nonwinterized units. Nonwinterized units shall be subjected to the tests specified in 4.5.2.1.1. through 4.5.2.1.10, inclusive. Failure to pass any test shall be cause for rejection.

4.3.2.2 Winterized units. In addition to the tests specified for nonwinterized units (see 4.3.2.1), the winterized lubricators shall be subjected to the tests specified in 4.5.2.2.1 through 4.5.2.2.4, inclusive. Failure to pass any test shall be cause for rejection.

4.3.3 Inspection failure. Failure of a first article lubricator to meet any requirement specified herein during and as a result of the examination and tests specified in 4.3 shall be cause for rejection of the first article lubricator(s) and shall be cause for refusal by the Government to continue acceptance of production lubricators until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on lubricators previously accepted and produced under the contract. Any deficiencies found as a result of the first article inspection shall be considered prima facie evidence that all lubricators accepted prior to the completion of first article inspection are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105. Sample size shall be determined using MIL-STD-105, table I and table IIa. A lot shall be accepted when zero defects are found, and rejected when one or more defects are found.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.3 Tests. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2.1.1. Failure to pass this test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The lubricator shall be examined for the following defects:

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

Major

101. Material not as specified (see 3.3).
102. Materials are not corrosion resistant or treated to be made corrosion resistant for the applicable storage or operating environment (see 3.3.1).
103. Dissimilar metals, as defined in MIL-STD-889 are not effectively insulated from each other (see 3.3.1.1).
104. Contractor does not have documentation available for identification of material, materials finishes or treatments (see 3.3.1.2).
105. Material Safety Data Sheet missing or incomplete (see 3.3.1.3).
106. Decontamination kit and installation not as specified (see 3.4.2).
107. Human factors engineering not as specified (see 3.5).
108. Components or accessories not accessible for repair, replacement or adjustment (see 3.6.1).
109. Fasteners inadequate missing or not as specified (see 3.6.1).
110. Dimensions and weight not as specified (see 3.7 and 3.8).
111. Enclosure not as specified (see 3.10).
112. Framework not as specified (see 3.11).
113. Lubricant containers not as specified (see 3.12).
114. Lubricant pumps not as specified (see 3.13).
115. Lubrication devices not accessible (see 3.13.1 and 3.13.2).
116. Adapter not as specified (see 3.14).
117. Transfer pump not as specified (see 3.15).
118. Air compressor not as specified (see 3.16).
119. Air-receiver and accessories not as specified (see 3.16.5).
120. Alcohol injector not as specified (see 3.17).
121. Engine not as specified, if applicable (see 3.18).
122. Fuel tank not as specified (see 3.18.3).
123. Engine-exhaust system not as specified (see 3.18.4).
124. Manual starting device not accessible (see 3.18.5).
125. Battery drawer and battery cables not as specified (see 3.18.5.3 and 3.18.5.4).
126. Control and instrument panel not as specified (see 3.18.6).
127. Safety devices or guards missing or inadequate, or sharp corners and sharp edges not rounded off (see 3.18.7).
128. Hose reels not as specified (see 3.19).
129. Control valves not as specified (see 3.20).
130. Hoses not as specified (see 3.21).
131. Wiring not as specified (see 3.22).
132. Accessory drawers not as specified (see 3.23).
133. Accessories missing or not as specified (see 3.24).
134. Lubrication not as specified (see 3.26).
135. Fire extinguisher not mounted as specified (see 3.28).
136. Identification or other marking, operating and safety instructions missing or not as specified (see 3.31).

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

137. Treatment and painting not as specified (see 3.34).
138. Final top coat color not as specified (see 3.34).
139. Toolbox not as specified (see 3.35).
140. Winterization not as specified, if applicable (see 3.36).
141. Trailer mounting not as specified, if applicable (see 3.37).
142. Workmanship not as specified (see 3.40).
143. Misalignment (see 3.40.4).
144. Welders and welding operators not certified as specified (see 3.40.5.1).
145. Welding and welds not as specified (see 3.40.5.2).

4.5.2 Tests.

4.5.2.1 Test conditions, nonwinterized units. Unless otherwise specified, (see 4.5.2.1.2), tests shall be performed without shelter and at the climatic conditions existing at the place of test. The lubricator shall operate as specified without maintenance other than the contractor's recommended normal scheduled maintenance as established by a maintenance schedule prepared and submitted by the contractor prior to test. Before performing the following tests, the lubricator shall be serviced with military fuels and lubricants designated for use at the ambient temperature at which the test is being conducted.

4.5.2.1.1 Initial operation. Sufficient lubricant shall be placed in the applicable containers to prime the lubricant pumps and purge all lines and control valves. The alcohol injector shall be filled with methyl alcohol and adjusted for operation at a rate of 9 ounces per hour. The engine shall be started and the compressor operated for 30 minutes. The lubricator shall be checked and any one of the following shall constitute failure of this test:

a. Erratic engine operation or indications of insufficient power and speed.
b. Inability of the compressor to produce 175 ± 10 psi.
c. Evidence of oil, grease, fuel or air leaks.
d. V-belt or clutch slippage.
e. Malfunction of the automatic idle device.
f. Alcohol injector inoperative.
g. Output and developed pressure of the lubricant pumps not as specified.

4.5.2.1.2 Minus 25 °F. The lubricant containers shall be filled not less than 3/4 full of the lubricants specified herein for use at -25 °F. Temperature probes shall be placed as close as practicable to the lubricant pump suctions, the engine crankcase, and in one of the central cells of each battery. The alcohol injector shall be filled with methyl alcohol and adjusted for operation at 9 ounces per hour. The lubricator shall be cooled to a temperature of -25 °F. The automatic idle device shall be set in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

"off" position. After all temperatures have stabilized at not more than -25 °F, and while maintaining the chamber temperature at not more than -25 °F, the following tests shall be performed.

4.5.2.1.2.1 Accessibility.

a. Close the battery drawer and then pull it open.
b. Close and open all lubricator doors including container covers.
c. Completely unreel each hose in turn and then reel it up again, checking operation of reel brakes, reels, and control-valve supports.
d. Open and close all valves.
e. Remove transfer pump and connect air hose and discharge hose. Replace transfer pump and hose.
f. Remove operating accessories from accessory drawers, connect or attach the items, if applicable and then replace.

A force in excess of 40 pounds for item "a" or inability to perform any operation "a" through "f" shall constitute a failure.

4.5.2.1.2.2 Operational. While at -25 °F, the lubricator shall be started and operated. Failure of the lubricator to start and dispense lubricants within 15 minutes as specified in 3.13.1, 3.13.2, and 3.15 shall constitute failure of this test.

4.5.2.1.3 Safety. Prior to starting the reliability and maintainability tests specified in 4.5.2.1.4, the following parameters shall be determined:

a. Engine exhaust back pressure (see 3.18.4).
b. Air compressor discharge air temperature (see 3.16.2).
c. Air receiver relief valve pressure actuation (see 3.16.5).
d. Engine high oil temperature switch actuation (see 3.18.7).

Nonconformance to any requirement specified above shall constitute a failure.

4.5.2.1.4 Reliability and maintainability. Using the MTBF specified in 3.6, the lubricator shall be tested as specified in 4.5.2.1.4.1 with "accept" and "reject" criteria in accordance with MIL-HDBK-781, Test Plan V. Continue testing until either an "accept" or "reject" decision is reached. Failure, for the purpose of this test, is defined as any malfunction which the operator cannot remedy by adjustment, repair, or replacement action, using controls, common tools, and spare parts within 60 minutes and which causes or may cause either: (a) Failure to commence operation or degradation of performance below designated levels; (b) serious personnel safety hazards; (c) serious damage to the lubricator by continued operation. Maintenance operations required during this test, both scheduled and non scheduled, shall be recorded for computation of the maintenance ratio. Nonconformance to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

reliability or maintainability requirements specified in 3.6 shall constitute failure of this test.

4.5.2.1.4.1 Performance cycle. The performance cycle for trailer mounted units shall consist of alternate repetitions of the components tests and road tests described in subparagraphs "a" and "b". When trailer mounting is not specified, then the components test only will be conducted disregarding the 30-hour time limit.

a. Components test. The lubricator shall be started, and each lubricant pump shall be operated for 10 minutes to recirculate lubricant into their respective containers, followed by 30 minutes of the engine-compressor running at idle speed. The foregoing operation shall be repeated for a total of 30 hours.
b. Roadability. The lubricator, filled with lubricants and mounted on the trailer chassis, shall be towed for 6 hours over primary roads at speeds up to 55 mph; for 3 hours over unimproved roads at speeds up to 35 mph; for 1 hour over cross-country terrain at speeds up to 20 mph which shall include side slopes up to 20 percent and grades up to 30 percent. A minimum of 10 uniform stops shall be made at each of the foregoing conditions.

4.5.2.1.5 Plus 120 °F. The lubricator shall be warmed to a temperature of +120 °F. With the temperatures of the oils, greases, and battery electrolyte stabilized and while maintaining a chamber temperature of +120 °F, the lubricator shall be started and operated for 1 hour. Failure of the lubricator to start and dispense lubricant as specified in 3.13.1, 3.13.2 and 3.15, or failure to operate for 1 hour shall constitute failure of this test.

4.5.2.1.6 Electromagnetic interference. Unless otherwise specified (see 6.2), the first article model shall be tested to determine conformance with 3.25. The contractor shall furnish to the contracting officer a report of the test required by MIL-STD-461, within the time frame specified. Disapproval shall constitute failure of this test.

4.5.2.1.7 Lunette weight. When the lubricator is trailer-mounted and filled to capacity with lubricants, the weight on the trailer lunette shall be measured. Lunette weight not between 350-500 pounds shall constitute failure of this test (see figure 4).

4.5.2.1.8 Lifting provision test. The lifting provisions shall be tested in accordance with MIL-STD-209 to prove conformance to 3.29. Inability to meet the requirements of 3.29 shall constitute failure of this demonstration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

4.5.2.1.9 Tiedown provision test. The tiedown provisions shall be tested in accordance with MIL-STD-209 to prove conformance to 3.30. Inability to meet the requirements of 3.30 shall constitute failure of this demonstration.

4.5.2.1.10 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474 requirements and reported in the format indicated by MIL-STD-1474, figure 11. As a minimum: noise levels shall be measured when equipment is operating under full load. MIL-STD-1474, 5.1.2.1.4 contours shall be taken at not fewer than 12 equal arc increments, one increment shall include data from the noisiest position. Additionally, the noise level at the typical operating position shall be provided as Db(A) level. Failure to comply with MIL-STD-1474 and 3.41 provisions shall constitute failure of this test.

4.5.2.2 Test conditions, winterized units. The winterized lubricator shall be placed in a cold chamber at -40 °F and allowed to remain until the temperature in the lubricator is stabilized. Temperature probes shall be as specified in 4.5.2.1.2.

4.5.2.2.1 Removal and replacement of sliding heater unit. Without tools, one person shall open the heater access door; disconnect the exhaust, fuel, and electrical lines; and remove the sliding heater assembly and then replace it. Inability to perform either removal or replacement of the sliding heater assembly within 2 minutes shall constitute failure of this test.

4.5.2.2.2 Crankcase heating. Determine the time required to raise the engine crankcase temperature from -40 °F to -25 °F after the heater is started. Inability to effect this temperature rise within 45 minutes shall constitute failure of this test.

4.5.2.2.3 Battery heating. Determine the time required to raise the electrolyte temperature from -40 °F to -25 °F after the heater is started. Inability to effect this temperature rise within 45 minutes or a recorded electrolyte temperature of more than 120 °F shall constitute failure of this test.

4.5.2.2.4 Operational. The space heater shall be started and the lubricator operated. Failure to start or to dispense lubricants as specified in table I within 1 hour after the winterization heaters are started shall constitute failure of this test.

4.6 Inspection comparison. When first article inspection is specified, the Government may select lubricators at any time during the contract production period and subject these lubricators to the examination specified in 4.5.1 and the tests specified in 4.5.2 to determine that the quality of the selected lubricator is equal to the quality standards established during first article

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

inspection. The inspection will be performed by the Government at a site selected by the Government. Lubricators shall be selected at random from those which have been accepted by the Government and shall not include the previously inspected first article lubricators.

4.6.1 Inspection failure. Failure of any lubricator when inspected as specified in 4.6 may be considered cause for refusal by the Government to continue acceptance of lubricators until objective evidence furnished by the contractor reveals that corrective action has been taken to eliminate the condition which caused the rejection.

4.7 Inspection of packaging.

4.7.1 First article pack inspection.

4.7.1.1 Examination. The first article pack shall be examined for the defects listed in 4.7.2.3. Presence of one or more defects shall be cause for rejection.

4.7.1.2 Test. The first article pack of crated lubricators for level A shall be subjected to the rail impact test of MIL-STD-1186, appendix A.

4.7.2 Quality conformance inspection of pack.

4.7.2.1 Unit of product. For the purpose of inspection a completed pack of any one level shall be considered a unit of product.

4.7.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.7.2.3 Examination. Samples selected in accordance with 4.7.2.2 shall be examined for the following defects. Presence of any defects shall be cause for rejection.

146.	Coated surfaces of machined surfaces not wrapped or covered with barrier-material as specified for level A (see 5.2.1.2).
147.	Pulley grooves not coated with primer as specified for level A see 5.2.1.4).
148.	Surfaces of pumps not coated with preservatives as specified for level A (see 5.2.1.7).
149.	Interior surfaces of alcohol injector not coated with preservative as specified for level A (see 5.2.1.8).
150.	Hoses not secured to prevent unwinding as specified for level A (see 5.2.1.10).
151.	Open ends of hoses not sealed with tape as specified for level A (see 5.2.1.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

152. Surfaces of the burner not coated with preservatives as specified for level A (see 5.2.1.11.1).
153. Interior of fuel pump not coated with preservative as specified for level A (see 5.2.1.11.2).
154. Interior of padlocks not treated with graphite as specified for level A (see 5.2.1.12.2).
155. Portable lubricators not coated with preservatives as specified for level A (see 5.2.1.12.2).
156. Fire extinguisher not removed and preserved as specified for level A (see 5.2.1.13).
157. Consolidation not as specified for level A (see 5.2.1.16).
158. Louver shutters not closed as specified for level A (see 5.2.1.16).
159. Marking illegible, incomplete, incorrect, or missing for level A or C (see 5.4).
160. The trailer chassis not preserved in accordance with MIL-V-62038, level A (mobile), when specified (see 5.2.1.5).
161. Tools such as the hacksaw frame and blades and the lubricating guns not preserved in accordance with PPP-P-40, level A (see 5.2.1.12.3).
162. Technical publications for each lubricator not preserved together in accordance with MIL-P-116, method IC-1 for level A (see 5.2.1.14).
163. Repair parts not preserved in accordance with MIL-P-116 for level A (see 5.2.1.15).
164. Maintenance tools not preserved in accordance with PPP-P-40 for level A (see 5.2.1.12.3).
165. Engine not preserved in accordance with MIL-E-10062 (see 5.2.1.3).
166. Air compressor and receiver not preserved in accordance with MIL-C-3600 for level A (see 5.2.1.6).
167. Electric motors not preserved in accordance with MIL-E-16298 for level A (see 5.2.1.11.3).

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination and testing within the time frame specified (see 6.2), to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination and tests shall be those specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.7). The first article pack may be accomplished utilizing either the first article model or a production lubricating and servicing unit. When the first article model is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the first article model and production lubricating and servicing units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

5.2 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Preservatives. Preservatives specified herein shall conform to the applicable specifications listed in and shall be applied in accordance with MIL-P-116.

5.2.1.2 Unprotected metal surfaces. Unprotected exterior metal surfaces, excluding machined surfaces, requiring the application of a contact preservative in accordance with MIL-P-116 shall be coated with type P-1 preservative. Exterior machined surfaces shall be coated with type P-6 preservative. The coated surfaces shall be wrapped or covered with greaseproof barrier material conforming to MIL-B-121, type I or II, grade A, class 2, secured in place with tape conforming to MIL-T-22085, type II.

5.2.1.3 Engines. Engines and engine accessories shall be preserved in accordance with MIL-E-10062, level A, method I, classification type II, for boxed lubricators and classification type I for unboxed (mobile) lubricators.

5.2.1.4 Drive belts and pulleys. Drive belts shall be removed or released from tension. Pulley grooves shall be coated with primer conforming to TT-P-664. Removed belts shall be preserved in accordance with MIL-P-116, method IC-1.

5.2.1.5 Trailer. When the lubricator is trailer-mounted, the trailer chassis shall be preserved in accordance with MIL-V-62038, level A (mobile).

5.2.1.6 Air compressor and air receiver. The air compressor and air receiver shall be preserved in accordance with MIL-C-3600, level A.

5.2.1.7 Lubricant pumps. The interior surfaces and working parts of the pumps and the air motors except the grease pump and exterior surfaces requiring a preservative shall be coated with P-10, type I, grade 10 preservative. The preservative shall be applied by actuating the pumps during the application of the preservative, and the excess preservative shall be drained. The interior surfaces of the grease pump shall be coated with type P-11 preservative. Exterior surfaces requiring a preservative in accordance with MIL-P-116 shall be coated with type P-7 preservative. The pumps shall be secured on the lubricant container compartment.

5.2.1.8 Alcohol injector. The interior surfaces of the alcohol injector shall be coated with P-10, grade 10 preservative.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T13:43Z
Check the source to verify that this is the current version before use.

5.2.1.9 Control valves. The control valves shall be individually preserved in accordance with MIL-P-116, method IC-1, applying P-10, grade 10 preservative to the internal and external surfaces.

5.2.1.10 Hoses. Hoses attached to reels shall be compactly wound on the reels and secured to prevent unwinding, and the reels shall be locked. Hoses not attached to reels shall be coiled to a minimum safe diameter, and the coils shall be secured with evenly spaced wraps of tape conforming to MIL-T-22085, type II or with cotton tape. The open ends of the hoses shall be sealed with tape specified above.

5.2.1.11 Space heater.

5.2.1.11.1 Burner. Unprotected interior surfaces of the burner shall be coated with P-10, grade 10 preservative. Unprotected exterior surfaces shall be coated with type P-1 preservative.

5.2.1.11.2 Fuel pump. Interior surfaces of the fuel pump and filter shall be coated with P-10, grade 10 preservative.

5.2.1.11.3 Electric motors. Electric motors shall be preserved in accordance with MIL-E-16298 by the alternate method as specified for equipment assembled to machines.

5.2.1.12 Accessories.

5.2.1.12.1 Padlocks and keys. The interior of the padlocks shall be treated with molybdenum disulfide lubricant applied through the key opening. The locks shall be operated to insure coverage of interior parts and surfaces. Each lock with keys shall then be preserved in accordance with MIL-P-116, method IC-1.

5.2.1.12.2 Lubrication fittings and adapters. Lubrication fittings and adapters of like size and description shall be preserved together in accordance with MIL-P-116, method IC-1, applying type P-7 preservative when required by the preservative application criteria of MIL-P-116.

5.2.1.12.3 Tools and lubricating guns. Tools and lubricating guns shall be preserved in accordance with PPP-P-40, level A.

5.2.1.12.4 Portable lubricator. The interior surface of the lubricator shall be coated with P-10, grade 10 preservative. Exterior metal surfaces requiring a contact preservative in accordance with MIL-P-116 shall be coated with type P-1 preservative. The lubricator shall be placed and secured in its mounting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

5.2.1.12.5 Other accessories. Other accessories of like description shall be preserved together in accordance with MIL-P-116, method IC-1, applying P-10, grade 10 preservative to surfaces of the item requiring a contact preservative in accordance with MIL-P-116.

5.2.1.13 Fire extinguisher. Exterior metal surfaces of the fire extinguisher requiring the application of a contact preservative in accordance with MIL-P-116, shall be coated with type P-1 preservative. The fire extinguisher shall be preserved in a box conforming to PPP-B-636, W6c. Box closure shall be in accordance with the appendix to the box specification, method V.

5.2.1.14 Technical publications. Technical publications for each lubricator shall be preserved together in accordance with MIL-P-116, method IC-1.

5.2.1.15 Repair parts. The preservative application criteria and applicable method(s) of preservation of MIL-P-116 shall be used to preserve repair parts.

5.2.1.16 Consolidation. Preserved components, repair parts, tools, publications, and accessories shall be placed in the drawers, toolbox, and miscellaneous-equipment box. Cushioning shall be provided to prevent damage. The drawers and boxes shall be closed and secured to prevent pilferage.

5.2.2 Level C. Each complete lubricator, repair parts, tools, accessories, and technical publications shall be preserved in accordance with MIL-STD-1190 in a manner to provide protection against deterioration and damage during shipment from the contractor to the initial destination.

5.3 Packing. Packing shall be level A or C as specified (see 6.2).

5.3.1 Level A.

5.3.1.1 Trailer-mounted units. Trailer-mounted lubricators shall not require packing except that the louver shutters in the lubricator enclosure shall be closed.

5.3.1.2 Skid-mounted units. Each lubricator, with the louver shutters in the enclosure closed, repair parts, and accessories comprising a complete lubricator shall be packed in a crate conforming to MIL-C-52950, type V, style B.

5.3.2 Level C. Each complete lubricator, repair parts, tools, accessories and technical publications shall be packed in accordance with MIL-STD-1190 to insure carrier acceptance and delivery to destination, without damage, at the

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

lowest ratings of the carrier in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.4 Marking. In addition to any special marking specified in the contract or purchase order (see 6.2) marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The lubricator is intended for use under both normal and extreme climatic conditions for the lubrication of tractors, trucks, shovels, and other types of construction equipment, and also for the inflation of tires.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

a. Title, number, and date of the specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When a first article is required for inspection and approval and the number of units required (see 3.2).
d. Opening for fuel filler neck and cap assembly when a diesel engine is specified (see 3.10.12).
e. When a diesel engine shall be specified (see 3.18 and 3.36.2).
f. When the Government will furnish the military standard engine (see 3.18.2).
g. Type of grease gun required if other than as specified (see 3.24).
h. When the electromagnetic interference report (see 3.25) and testing (see 4.5.2.1.6) shall be deleted.
i. When all components are not filled to the operating level (see 3.26.6).
j. When lubricator shall not be treated for fungus and moisture resistance (see 3.27).
k. Paint color when other than as specified (see 3.34).
l. When lubricator shall be winterized (see 3.36).
m. When lubricator shall be trailer-mounted (see 3.37).
n. Whether the trailer shall be furnished by the Government or the contractor (see 3.37).
o. When the trailer will be loaned by the Government (see 3.39).
p. Time frame for submission of electromagnetic interference report (see 4.5.2.1.6).
q. Time frame required for submission of first article pack (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

r. Level of preservation and packing required (see 5.2 and 5.3).
s. Any special marking required (see 5.4).

6.3 Government-furnished property. The contracting officer should arrange to furnish the property listed in 3.38, as specified, and information regarding the installation of the Government-furnished engine.

6.4 Government-loaned property. The contracting officer should arrange to loan the property specified in 3.39.

6.5 Trailer chassis. When the trailer chassis is to be furnished by the contractor, the contracting officer should furnish specifications and drawings covering the requirements for the trailer (see 3.37). When the trailer chassis is furnished by the contractor, the lubricator shall be road tested concurrently with the trailer chassis in accordance with this specification. The criteria for failure of the lubricator as specified in 4.5.2.1.7 of this specification shall apply.

6.6 First article. When a first article inspection is required (see 3.2), the item(s) should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of the first article test results and disposition of the first articles. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.7 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the contractor of his obligation to preserve, package, pack, and mark the lubricators in accordance with this specification.

6.8 Material Safety Data Sheets. Contracting officers shall identify those activities requiring copies of completed Material Safety Data Sheets prepared in accordance with FED-STD-313. The pertinent Government mailing addressed for submission of data are listed in appendix B of FED-STD-313.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

6.9 Subject term (key word) listing.

Compressor
Grease
Lubricants
Pumps, lubricant

6.10 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Air Force - 99

Review activities:
Air Force - 82
DLA - CS

User activities:
Army - AT
Navy - MC

Preparing activity:
Army - ME

Project 4930-0341

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

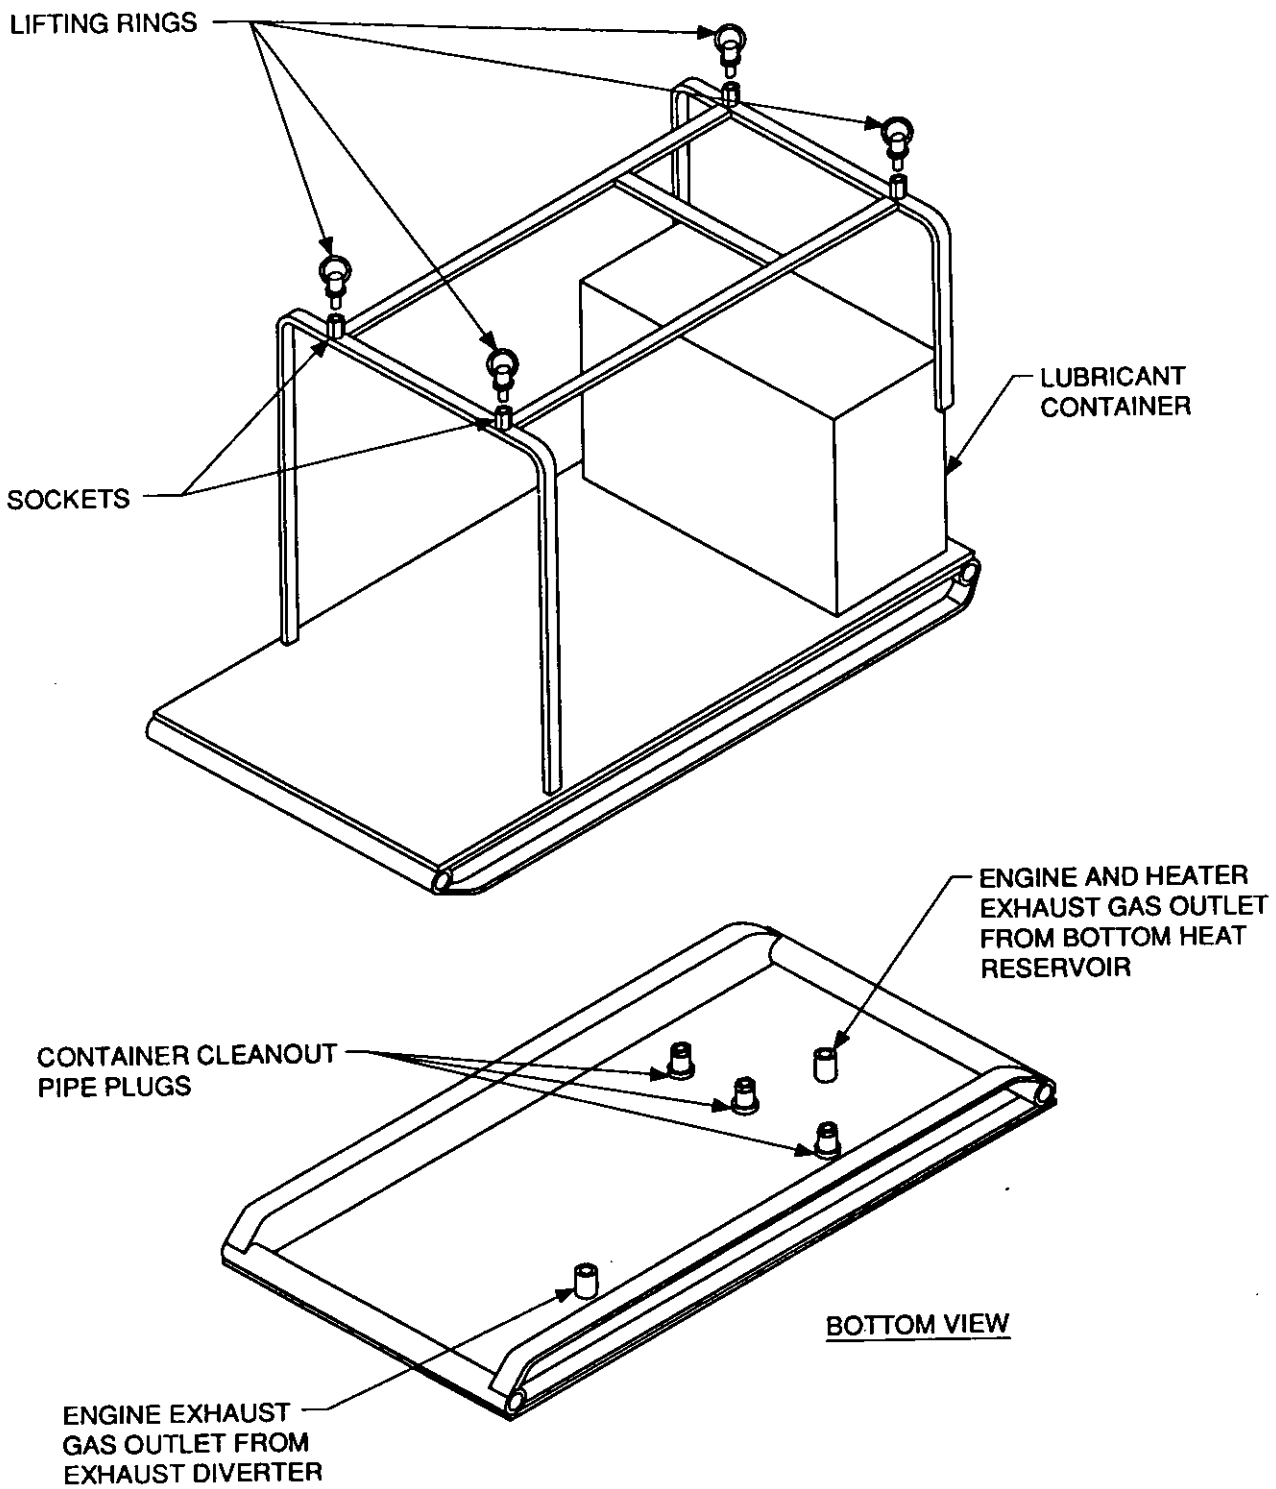


FIGURE 1. ISOMETRIC VIEW OF FRAMING

X-1257A

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

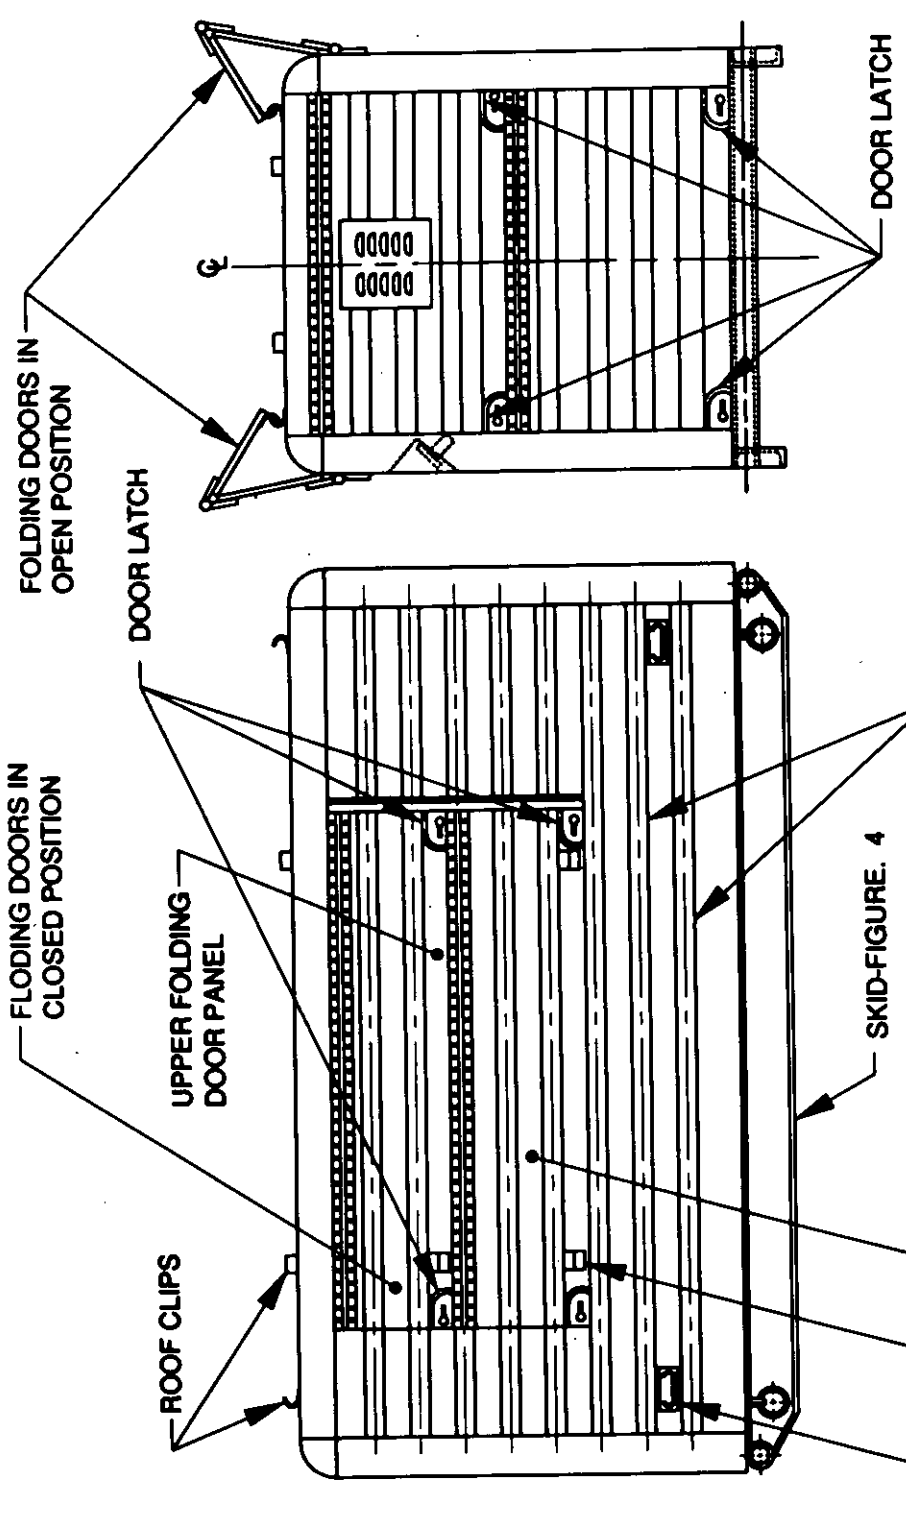


FIGURE 2. ASSEMBLY, ENCLOSURE AND SKID. X-1255B

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

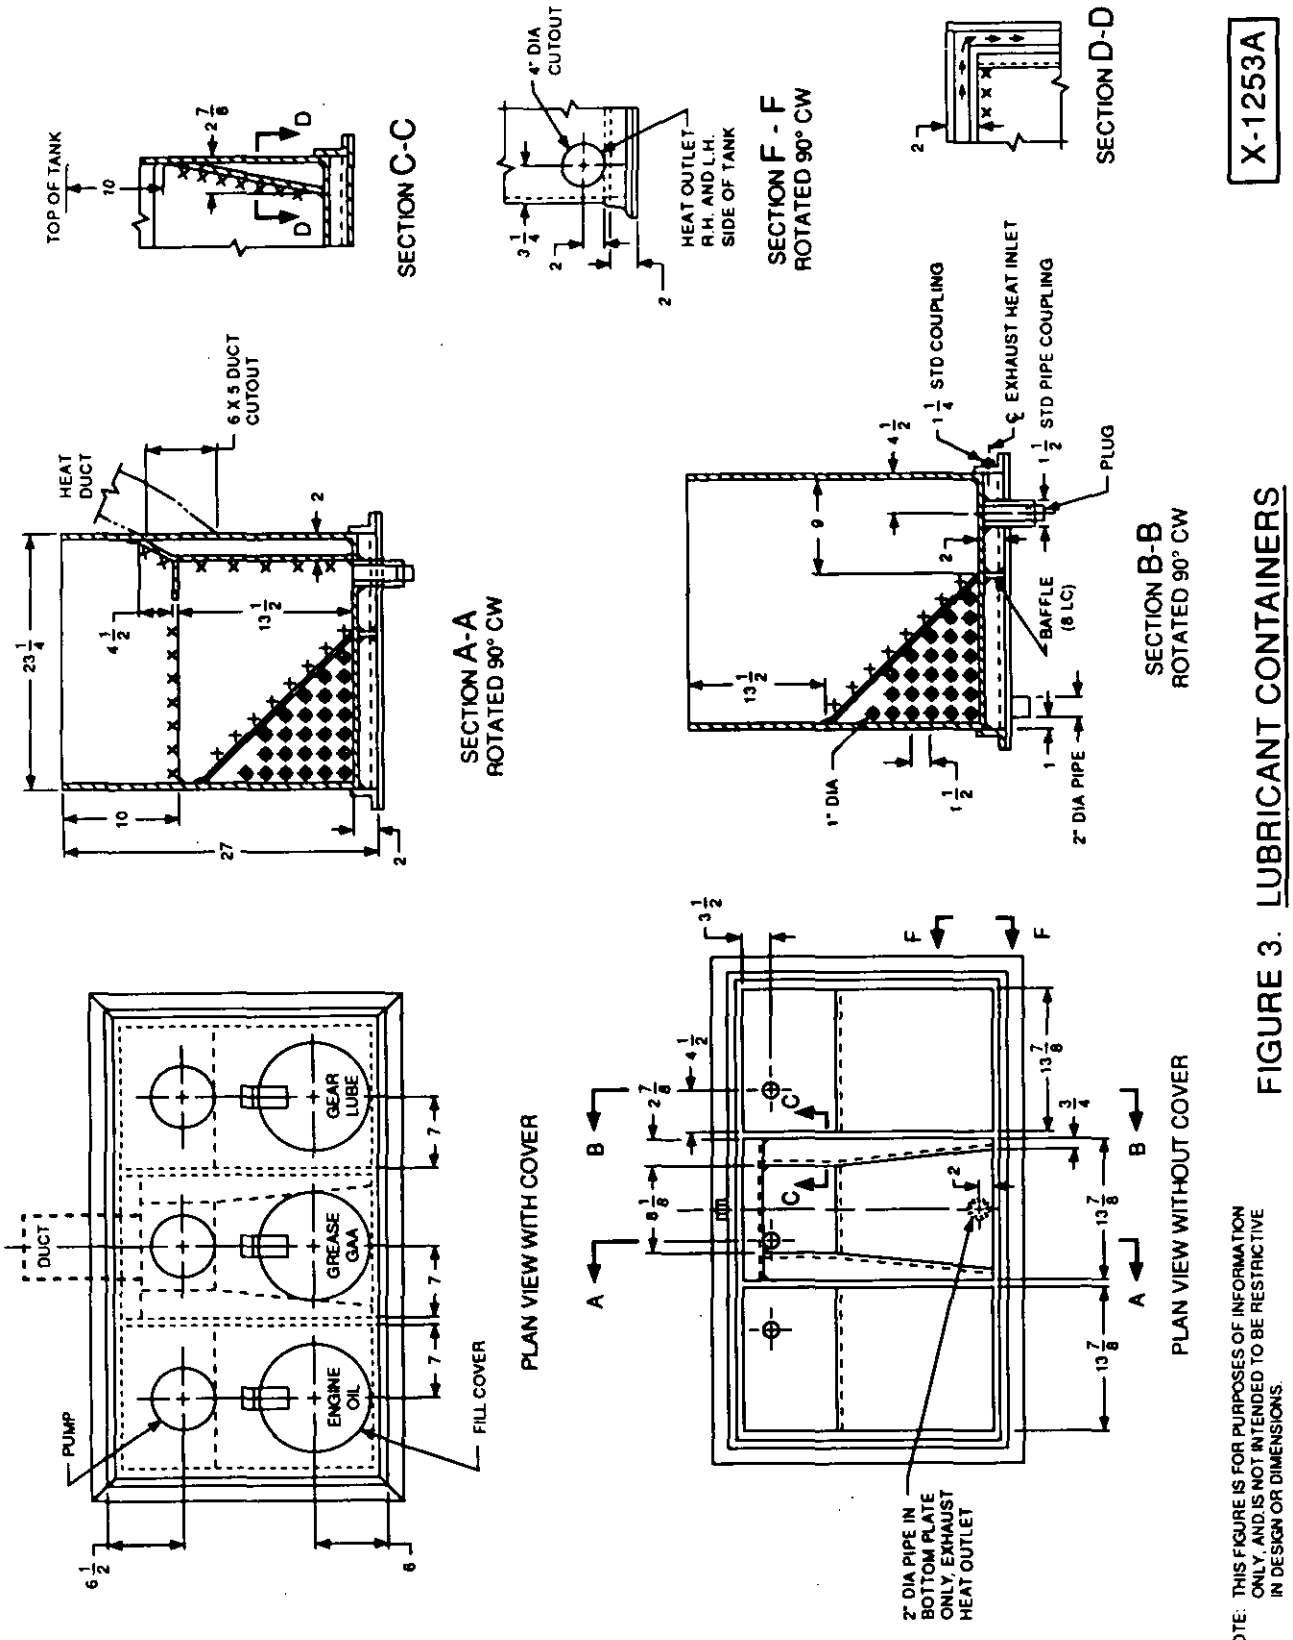


FIGURE 3. LUBRICANT CONTAINERS

X-1253A

NOTE: THIS FIGURE IS FOR PURPOSES OF INFORMATION ONLY, AND IS NOT INTENDED TO BE RESTRICTIVE IN DESIGN OR DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

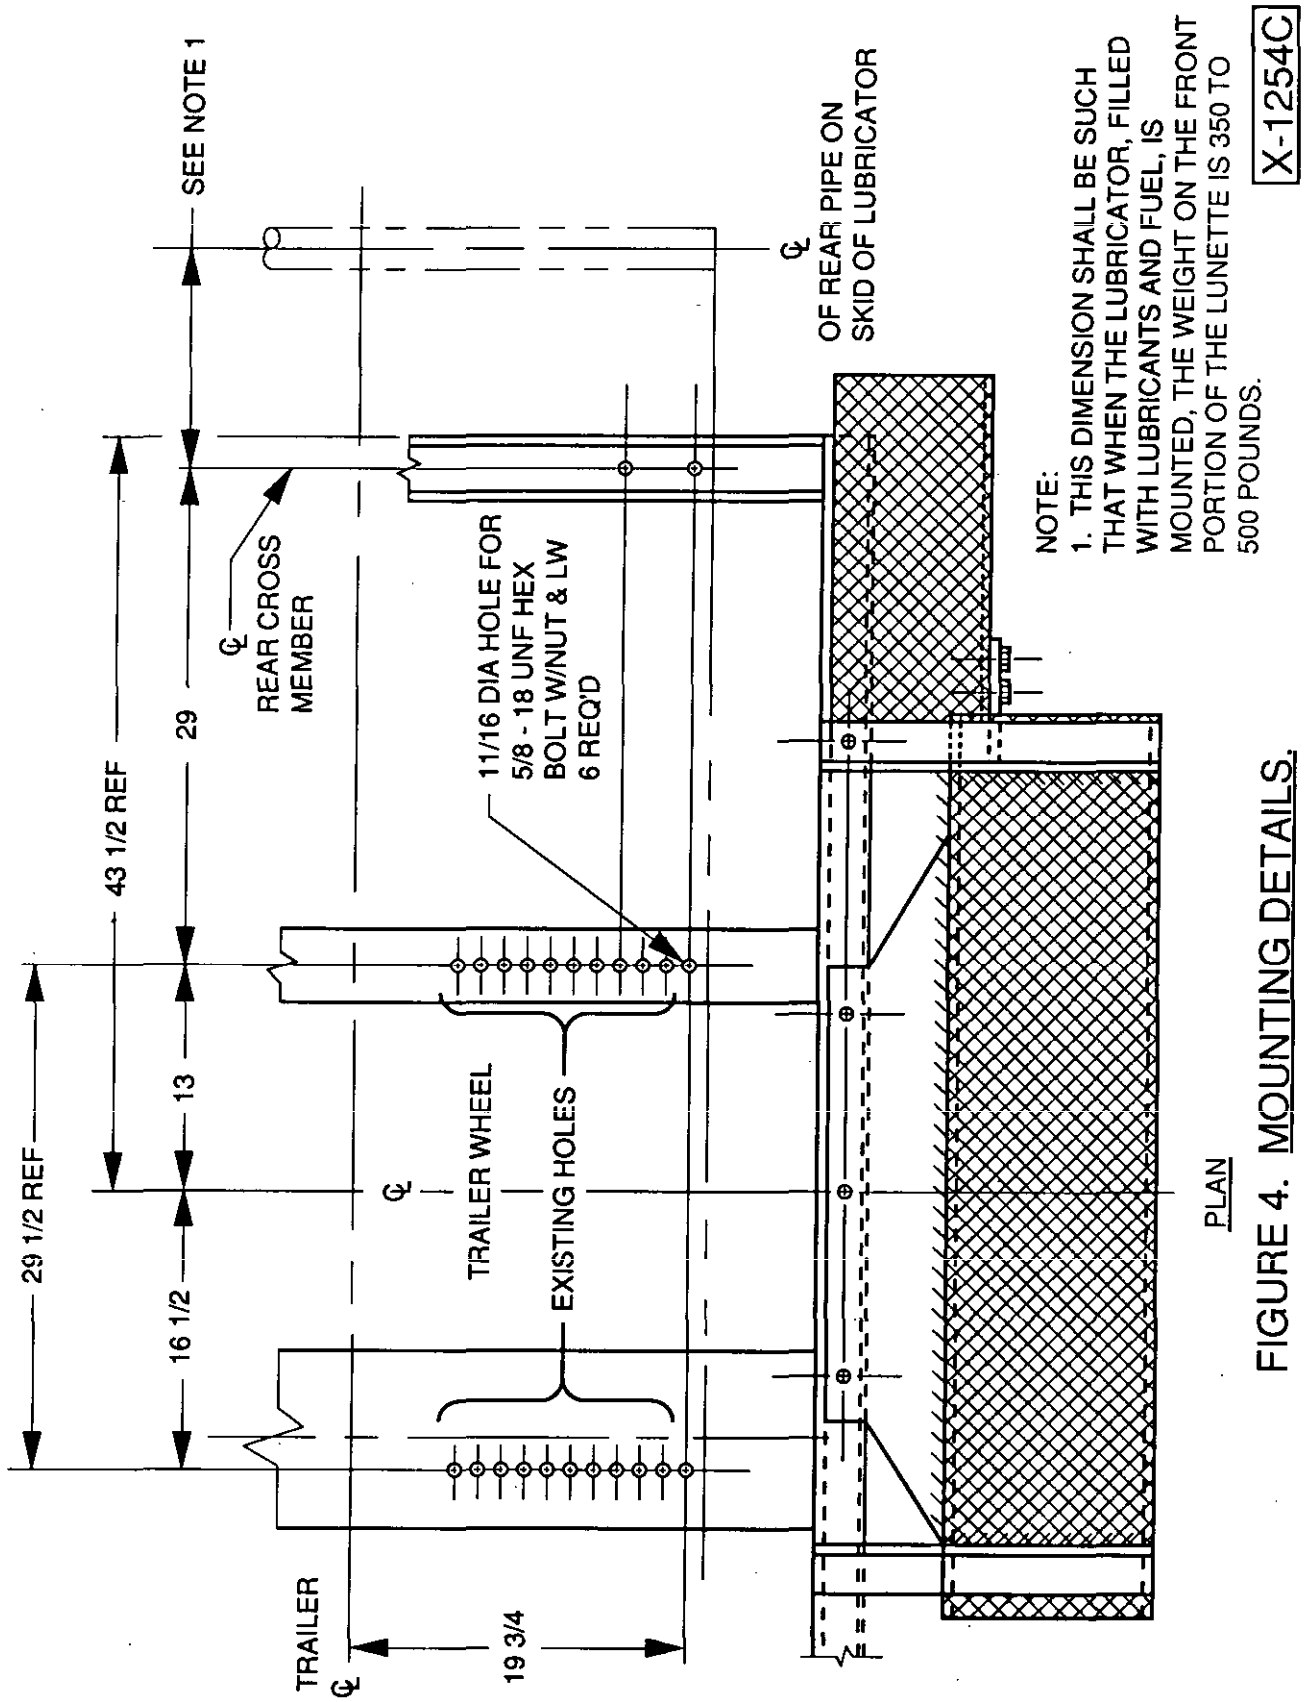


FIGURE 4. MOUNTING DETAILS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:43Z
Check the source to verify that this is the current version before use.

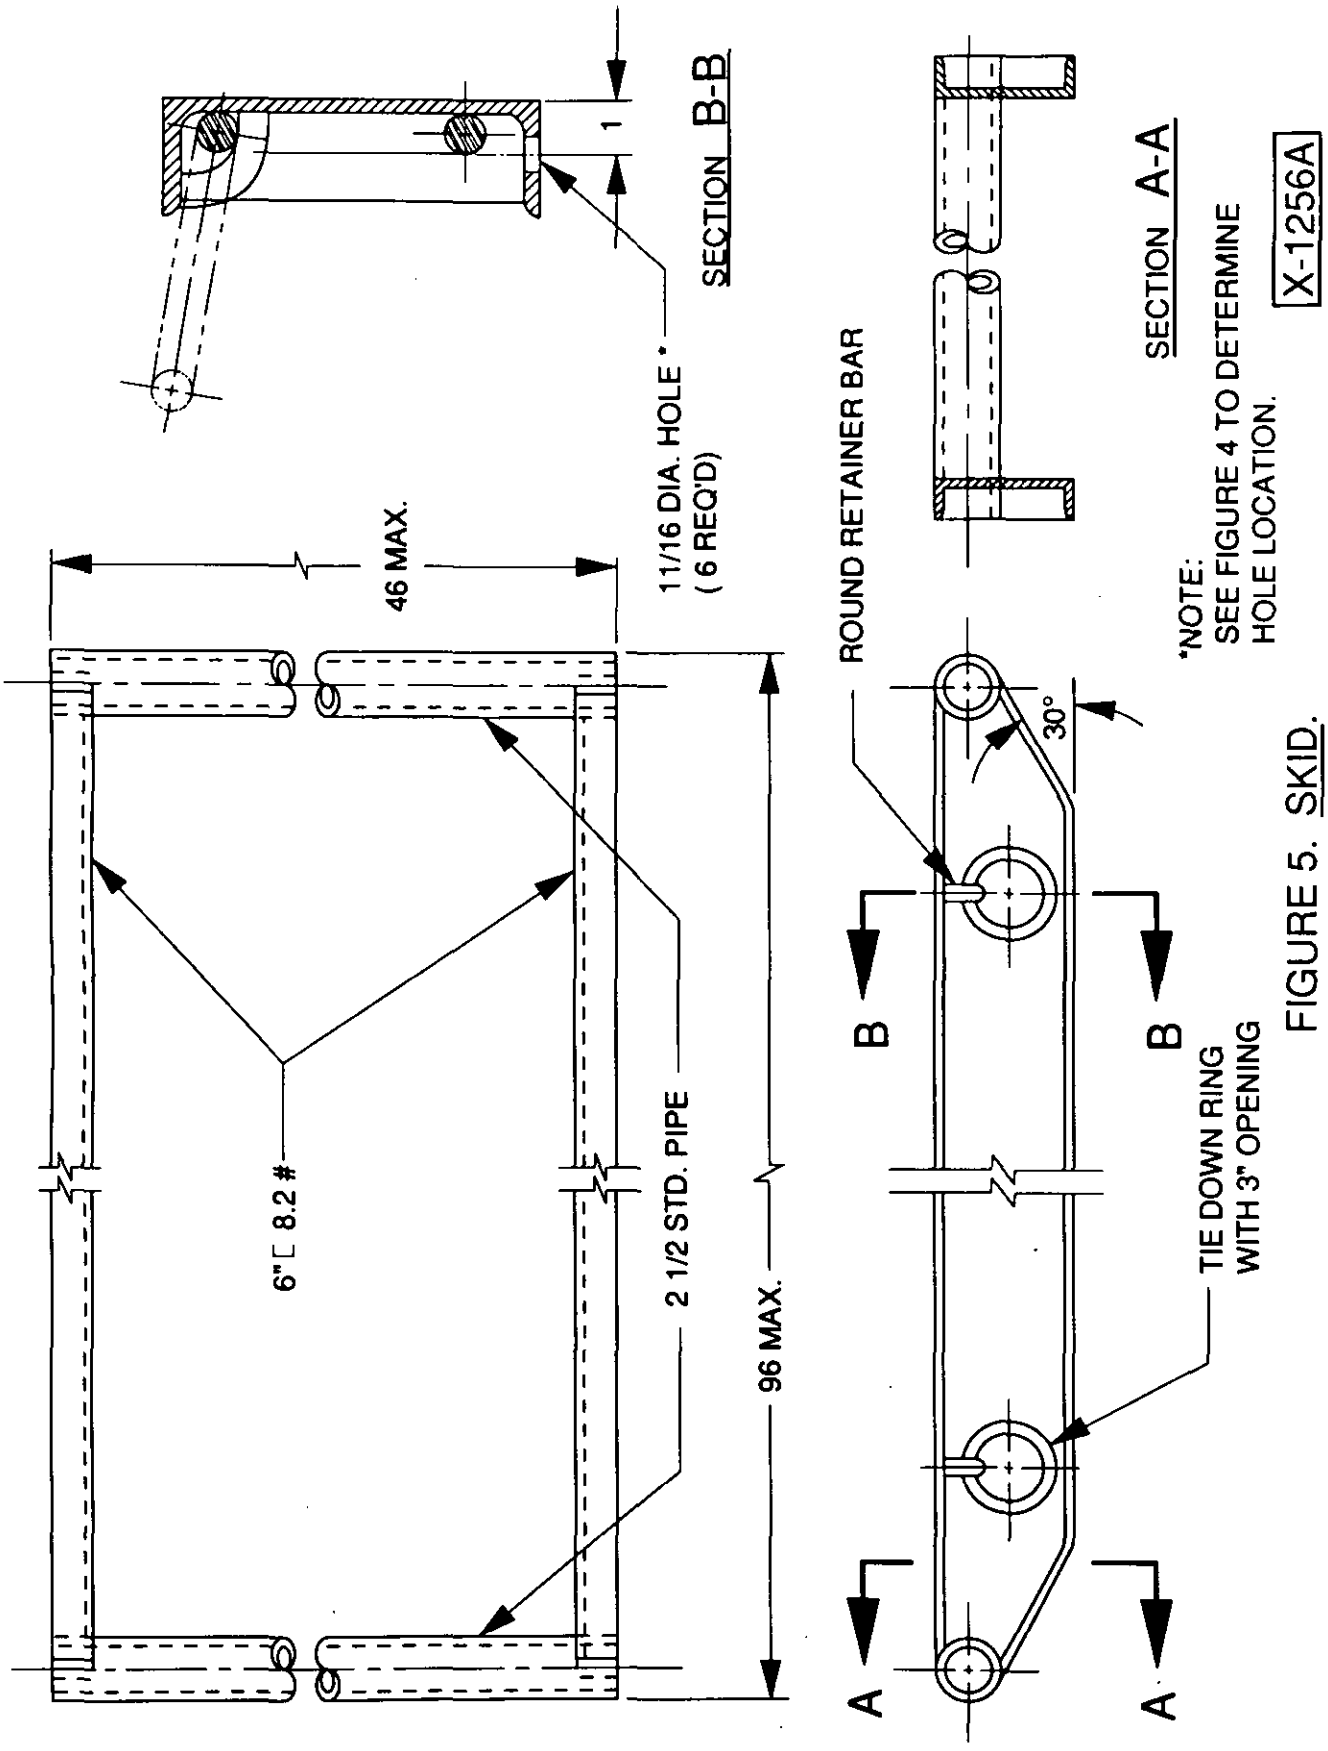


FIGURE 5. SKID.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1,2,3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4,5,6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of this letter.

NOTE: This form may not be used to request copies of documents, nor to request waives requirements in current contracts. Comments submitted on this form do not constitute or imply autdhorization to waive any portion of the referenced document(s) or tdo amend contractural requirements.

RECOMMENDED CHANGE:	1. DOCUMENT NUMBER MIL-L-10269H	2. DOCUMENT DATE (YYMMDD) 910705

3. DOCUMENT TITLE
Lubricating and Servicing Unit, Power-Operated, Portable

4. NATURE OF CHANGE (identify paragraph number and include proposed if possible. Attach extra sheets as needed).

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (LAST,FIRST MIDDLE INITIAL)	b. ORGANIZATION	
c. ADDRESS (Include zip code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. Name Carolyn B. Johnson	b. TELEPHONE (In lude Area Code) (1) Commercial (2) AUTOVON (703) 664-5717 354-5717
c. ADDRESS (Include zip code) Belvoir RDE Center ATTN: STRBE-TSE Fort Belvoir, VA 22060-5606	If you do not receive a reply with 45 days, contact: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:43Z
Check the source to verify that this is the currenversion before use.