A-A-377B
September 5, 1991
TO SUPERSEDE
A-A 377A
January 1, 1991

COMMERCIAL ITEM DESCRIPTION

BRUSH, ROOF, KNOTTED STYLE THREE KNOTS

This specification is approved by the Assistant Administrator, Office of Federal Supply Service, General Services Administration for the use of all Federal Agencies.

1. Scope. This commercial item description covers roofing brushes designed for the application of tar and asphalt to roofs.

2. Salient characteristics:

(a) The block shall be made of smooth finished, close-grained hardwood, or foamed, structural polyethylene.

(b) The dimensions of the block shall be not less than 6 inches (152 mm) long, 1-3/4 inches (45 mm) thick, 2-1/8 inches (54 mm) wide, and shall be provided with a threaded hole with a 3/4 inch (12 mm) 5-pitch acme thread for attaching an extension pole. (See figure 1)

(c) The knots shall be not less than 1-3/8 inches (35 mm) in diameter from the ferrule.

(d) The filament in each knot shall consist of white or gray tampico fiber, and shall extend not less than 3 inches (76 mm) from the ferrule.

3. Certification. The contractor shall certify that the product offered meets the salient characteristics of this description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.


4. Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.


DISTRIBUTION STATEMENT: Approved for public release. Distribution is unlimited.

FSC 8020

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.

5. Packaging, packing, and marking. The packaging and packing shall be in accordance with normal commercial practice and shall assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling, and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

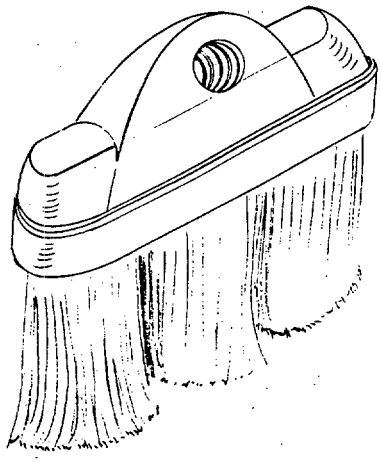

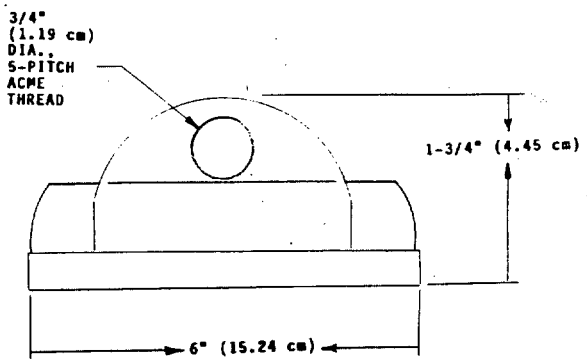




FIGURE 1. A-A-377 Block, typical

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:07Z
Check the source to verify that this is the current version before use.