MILITARY SPECIFICATION

DISTRIBUTION BOX: 10548533

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the distribution box, a part of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel; Packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods

DRAWINGS

U.S. ARMY, FRANKFORD ARSENAL

F10548533	Distribution Box
F10548461	Schematic, Distribution Box

PACKAGING DATA SHEET

10548533	Packaging of Distribution Box

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Frankford Arsenal, ATTN: SARFA-MDM, Phila., Pa. 19137 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and packaging data sheets required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication.- The Distribution Box shall be manufactured in accordance with Drawing F10548533 and drawings pertaining thereto.

3.2 General specifications.- Where applicable, the Distribution Box shall meet the requirements of MIL-F-13926 as follows:

3.2.1 MIL-F-13926.

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishings
d. Part identification and marking
e. Workmanship
f. Soldering electrical connections

3.3 Environmental service conditions.

3.3.1 Vibration.- The Distribution Box shall be mounted on the vibration table in normal service position. The Distribution Box shall meet the requirements of 3.4 and 3.5 after being subject to continuous vibration for 2 hours along each of three mutually perpendicular axes within the frequency range of 10 to 55 hertz (Hz) and a half amplitude excursion of 1/64 inch. The rate of change of frequency at each frequency range shall not exceed 1 Hz per second. Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock.- The Distribution Box shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The half sine impulses shall have an acceleration of 15 gravity units (G) and a pulse duration of 11 $\pm$ 1 milliseconds (ms). The G value of each impulse shall be within $\pm$ 10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5-1/2 ms.

3.3.3 Altitude.

3.3.3.1 Operating.- The Distribution Box shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

3.3.3.2 Nonoperating.- The Distribution Box shall meet the requirements of 3.4 and 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 inches Hg).

3.3.4 Temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.3.4.1 Operating.- The Distribution Box shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40°F and +155°F.

3.3.4.2 Nonoperating (storage).- The Distribution Box shall not suffer permanent damage when subjected to not less than 4 hours at each temperature extreme of -65°F and +160°F, and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (nonoperating).- The Distribution Box shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity of 95 ± 5 percent for a period of not less than 10 days.

3.4 Electrical.- Each conductor shall be electrically continuous as specified on the Runs List (10548465) of the Distribution Box.

3.4.1 Spare Pins.- The following connector pins shall remain as spares:

J1 - A and B
J2 - A through C and N through T
J3 - C through F and P through T
J4 - B through F, J through R, T through V, and Z
J5 - B, C, J through L, and T through V

3.5 Performance.

3.5.1 DC Input Voltage Isolation.- When +24 ± 0.3 Vdc is applied to connector pin J3-c and the Distribution Box Mode Switch (S1) set to NORMAL and the Maintenance switch set to ON, the +24 Vdc shall not be present at connector pin J3-p (ref. to 24 V RET.).

When +24 ± 0.3 VDC is applied to connector pin J3-p and the Distribution Box is in the Maintenance Mode, the +24 Vdc shall not be present at connector pin J3-c (ref. to 24 V RET.).

3.5.2 Normal Mode.- When +24.3 ± 0.3 Vdc is applied to connector pins J3-p, 24 V RETURN on Pin J3-t, and Mode switch (S1) set to NORMAL and the Maintenance switch (S4) set to OFF, the following voltage will be present at the prescribed connector pins of the Distribution Box:

MEASUREMENT		
+24 ± 0.3 Vdc (+)	24 V RETURN (-)	FUNCTION
J4-n	J4-a	Traverse Brake Control
J5-n	J5-a	Elevation Brake Control
J3-H	J5-a	Traverse Servo Control
J3-V	J5-a	Elevation Servo Control

NO VOLTAGE	REFERENCE	FUNCTION
J3-d	J5-a	Stow Right
J3-U	J5-a	Stow Up

There shall be no continuity between connector pins J3-G and J3-t of the Distribution Box (NORM/STOW SELECT).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

3.5.3 Maintenance Mode.- When +24.3 ± 0.3 Vdc is applied to connector pin J3-c, 24 V RETURN to pin J3-t, and the Mode switch (S1) set to NORMAL, maintenance switch (S4) set to ON, the following voltage will be present at the prescribed connector pins of the Distribution Box:

MEASUREMENT		
+24 ± 0.3 Vdc (+)	24 V RETURN (-)	FUNCTION
J4-n	J4-a	Traverse Brake Control
J5-n	J5-a	Elevation Brake Control
J3-H	J5-a	Traverse Servo Control
J3-V	J5-a	Elevation Servo Control

NO VOLTAGE	REFERENCE	FUNCTION
J3-d	J5-a	STOW RIGHT
J3-U	J5-a	STOW UP

There shall be no continuity between connector pins J3-G and J3-t of the Distribution Box (NORMAL/STOW SELECT).

3.5.4 Stow Mode.- When +24 ± 0.3 Vdc is applied to connector pin J3-c, 24 V RETURN on pin J3-t, and the Mode switch (S1) set to STOW, Maintenance switch (S4) set to ON, the following voltage will be present at the prescribed connector pins of the Distribution Box for the specified switch positions:

SWITCH	POSITION	+24 ± 0.3 Vdc	24V RETURN (-)
TRAVERSE STOW (S2)	RIGHT	J3-H	J3-G
TRAVERSE STOW (S2)	RIGHT	J3-H	J3-d
TRAVERSE STOW (S2)	LEFT	J3-H	J3-G
ELEVATION STOW (S3)	UP	J3-V	J3-G
ELEVATION STOW (S3)	UP	J3-V	J3-U
ELEVATION STOW (S3)	DOWN	J3-V	J3-G

SWITCH	POSITION	NO VOLTAGE	REFERENCE
TRAVERSE STOW (S2)	LEFT	J3-H	J3-d
ELEVATION STOW (S3)	DOWN	J3-V	J3-U

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) submission.- The requirement for first article approval and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of a Distribution Box manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies.- All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provision (SQAP) listed in the technical data package (TDP). In the absence of SQAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection.- Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in 4.3.2.3 and 4.4 herein. Examination and test for packaging and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in 4.3.2.3 and 4.4 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.3.2.3 Functional tests.- The requirements and tests in Table I shall be inspected on a 100 percent basis. All examinations and tests

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

shall be conducted at the standard ambient temperature (60°F to 90°F).

TABLE I - CLASSIFICATION OF DEFECTS
(100 percent inspection)

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
CRITICAL: NONE		
MAJOR:		
101. Electrical	3.4	4.6.2
102. Performance	3.5	4.6.3
MINOR: NONE		

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.- One Distribution Box shall be selected at random by a Government representative as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table II. Three Distribution Boxes shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever occurs first. The control samples shall meet the requirements and tests in Table III.

TABLE II - SPECIAL SAMPLING

CONTROL TEST	REQUIREMENT	TEST PROCEDURES
301. Fabrication	3.1	Applicable drawings - Visual
302. General specifications	3.2	MIL-F-13926 Visual

TABLE III - SPECIAL SAMPLING, ENVIRONMENTAL

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
303. Vibration	3.3.1	4.6.1.1
304. Shock	3.3.2	4.6.1.2
305. Altitude	3.3.3	4.6.1.3
306. Temperature	3.3.4	4.6.1.4
307. Humidity (nonoperating)	3.3.5	4.6.1.5

4.4.1 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by Government until necessary corrections have been made by the contractor and a resubmitted sample has been approved (see 4.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government-furnished inspection equipment.- Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.5.2 Contractor-furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Test equipment.- In conjunction with 4.5.2.1, the test equipment listed in Table IV shall be used in the performance of the applicable test as specified in 4.6.

TABLE IV - TEST EQUIPMENT LIST

ITEM NUMBER	DESCRIPTION
1. Power Supply	+24.0 ± 0.3 Vdc, .500 milliamps
2. Digital Voltmeter (DVM)	Range: 0-30 Vdc Accuracy: ±0.1% of input ±1 Digit of range. Input Impedence: 10 megohms.
3. Ohmeter (VOM)	Triplett Model 630 PL or equivalent
4. Adapter Cable (3 ea)	Banana Plug to #16 Socket Contact, MS3192-16A.
5. Adapter Cable (2 ea)	Banana Plug to #20 PIN Contact, MS3192-20A.
6. Adapter Cable (2 ea)	Banana Plug to #20 Socket Contact, MS3192-20A.

4.6 Test methods and procedures.

4.6.1 Environmental.- Environmental tests shall be conducted in

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810.

4.6.1.1 Vibration.- The test shall be performed as specified in Method 514, Procedure IX, of MIL-STD-810 except that failure criteria do not apply. After vibration, the Distribution Box shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.1.

4.6.1.2 Shock.- This test shall be performed as specified in Procedure I, Method 516 of MIL-STD-810 except that shock pulses shall be 11.0 ms and 15 G. After the shock impulses, the Distribution Box shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.2.

4.6.1.3 Altitude (nonoperating and operating).- This test shall be performed as specified in Procedure I, Method 500 of MIL-STD-810 except that in Step 2 the altitude shall be limited to 40,000 feet (5.5 in Hg). Operation of Step 3 shall be the performance tests specified in 4.6.3.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and nonoperating).- This test shall be performed as specified in Procedure I, Method 501 of MIL-STD-810. The temperature of Step 2 shall be +160°F. The temperature of Step 3 shall be maintained for not less than 4 hours. The temperature of Step 4 shall be +155°F. In Step 5 the temperature shall be maintained for 4 hours and the Distribution Box shall be tested in accordance with 4.6.2 and 4.6.3 during this time.

4.6.1.4.2 Low (operating and nonoperating).- This test shall be performed as specified in Procedure I, Method 501 of MIL-STD-810. The temperature of Step 2 shall be -65°F maintained for not less than 4 hours. The temperature of Step 4 shall be -40°F. In Steps 5 and 7, the Distribution Box shall be tested in accordance with 4.6.2 and 4.6.3.

4.6.1.5 Humidity (nonoperating).- This test shall be performed in accordance with Procedure II, Method 507 of MIL-STD-810. The Distribution Box shall be tested in accordance with 4.6.3.

4.6.2 Electrical.- Continuity shall be measured with no power applied to the unit using an ohmmeter, Item 3 (Table IV) and visual examination for compliance with 3.4.

4.6.2.1 Spare Pins.- Verify that the connector pins as specified in paragraph 3.4.1 are retained as spare pins.

4.6.3 Performance.- The selected Distribution Box shall be tested as follows:

4.6.3.1 DC Input Voltage Isolation.- Set the Mode switch (S1) to NORMAL and Maintenance switch (S4) to ON. Connect the positive lead of the Ohmmeter, Item 3 of Table IV, to pin J3-p and the negative lead to pin J3-V. Set the Ohmmeter to the X 100 K scale. Note the Ohmmeter

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

reading. Connect the positive lead to pin J3-c and note the Ohmmeter reading.

Reverse the meter leads, positive lead on pin J3-V and negative lead on pin J3-c. The Ohmmeter shall have a reading 200 times greater than the first reading (front to back ratio > 200). Connect the negative lead to pin J3-p. The Ohmmeter shall have a reading 200 times greater than the first reading.

4.6.3.2 Normal Mode.- Adjust the power supply (Item 1) for +24.3 ± 0.3 Vdc and connect the positive (+) terminal to J3-p, negative (-) terminal to J3-t (refer to Figure 1). Set the Mode Control switch (S1) to "Normal" and the Maintenance switch (S4) to OFF. Connect the DVM (Item 2) to the following points and measure the indicated voltage:

DVM Pos. (+)	DVM Neg. (-)	Voltage	Function
J4-n	J4-a	+24V ± 0.3 Vdc	Traverse Brake Control
J5-n	J5-a	+24V ± 0.3 Vdc	Elevation Brake Control
J3-H	J5-a	+24V ± 0.3 Vdc	Traverse Servo Control
J3-V	J5-a	+24V ± 0.3 Vdc	Elevation Servo Control
J3-d	J5-a	OV	Stow Right
J3-U	J5-a	OV	Stow Up

Using the VOM, measure for no continuity between pins J3-G and J3-t of the Distribution Box.

4.6.3.3 Maintenance Mode.- Connect the power supply positive (+) terminal to J3-c, negative (-) terminal to J3-t. Set the Maintenance switch (S4) to "ON". Connect the DVM to the following points and measure the indicated voltage:

Pos. (+)	Neg. (-)	Voltage	Function
J4-n	J4-a	+24V ± 0.3 Vdc	Traverse Brake Control
J5-n	J5-a	+24V ± 0.3 Vdc	Elevation Brake Control
J3-H	J5-a	+24V ± 0.3 Vdc	Traverse Servo Control
J3-V	J5-a	+24V ± 0.3 Vdc	Elevation Servo Control
J3-d	J5-a	OV	Stow Right
J3-U	J5-a	OV	Stow Up

Using the VOM, measure for no continuity between connector pins J3-G and J3-t of the Distribution Box (NORMAL/STOW SELECT).

4.6.3.4 Stow Mode.- With the power supply connect as in 4.6.3.3 and adjusted for +24V ± 0.3 Vdc, set Mode Control Switch (S1) to "Stow". Connect the DVM to the following points and measure the indicated voltage only when the indicated switch is depressed: (Note: Traverse Stow and Elevation Stow switches are spring loaded center-off type.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

DVM Pos.(+)	DVM Neg.(-)	Switch	Position	Voltage
J3-H	J3-d	Traverse Stow	Right	+24V ± 0.3 Vdc
J3-H	J3-d	Traverse Stow	Left	0V
J3-H	J3-G	Traverse Stow	Right	+24V ± 0.3 Vdc
J3-H	J3-G	Traverse Stow	Left	+24V ± 0.3 Vdc
J3-V	J3-U	Elevation Stow	Up	+24V ± 0.3 Vdc
J3-V	J3-U	Elevation Stow	Down	0V
J3-V	J3-G	Elevation Stow	Up	+24V ± 0.3 Vdc
J3-V	J3-G	Elevation Stow	Down	+24V ± 0.3 Vdc

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking.- Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 10548553. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use.- The Distribution Box provides a point to interface the Power Supply PP-4812/VPS-2, Antenna AS-2049/VPS-2 and sight current generator into the antenna servo loop configuration. Motor and control voltages from the power supply are routed through the Distribution Box to the traverse and elevation drive assemblies of the antenna. Feedback information to the power supply and positioning information to the sight current generator, from the antenna, are also routed through the Distribution Box. In addition, the Distribution Box provides four switches which are used to position the antenna during maintenance and stow operations.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Applicable packaging data sheet number (see 5.1).
c. Selection of applicable level of preservation packaging and packing.
d. Level of protection required.
e. Applicable stock number.
f. Requirement for first article submission.

Custodian:

Army - MU

Preparing Activity:

Army - MU

Project No. 1285-A376

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

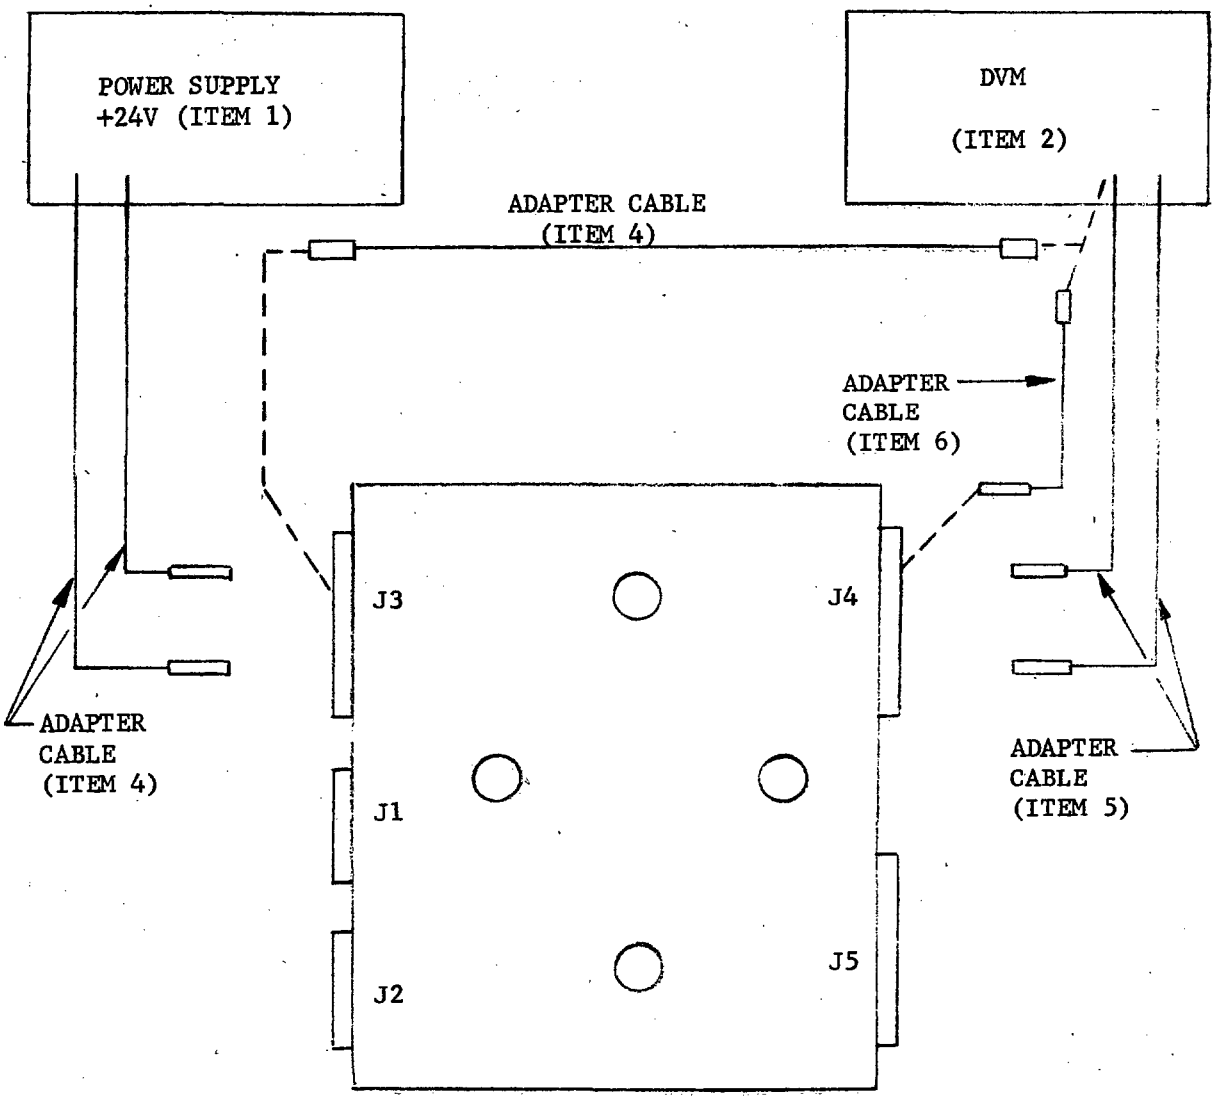


FIGURE 1
DISTRIBUTION BOX TEST SET-UP

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-D-48435(MU), Distribution Box: 10548533

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

ARRADCOM, Frankford Arsenal
ATTN: DRDAR-TST-S
Philadelphia, PA 19137

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:26Z
Check the source to verify that this is the current version before use.