MILITARY SPECIFICATION

FUZE, ROCKET, BASE DETONATING, M442

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers the quality assurance provisions and special requirements not covered by the drawings for one type of fuze designated as Fuze, Rocket, Base Detonating, M442.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

2.1.1 Specification and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-A-48078	-	Ammunition, Standard Quality Assurance Provisions, General Specification for
MIL-F-50541	-	Fuze for Elechette Warhead, WDU - 4A/A (Less Expulsion Charge)

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-331	-	Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-810	-	Environmental Test Methods

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U S Army Armament Munitions and Chemical Command, Attn AMSMC-QA, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

AMSC N/A
FSC 1340
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

US ARMY ARMAMENT, RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

8796522	-	Marking Diagram and Sealing For Wood Packing Boxes
8883478	-	Cent, Ammo, Fiber, M518, for Rocket Motor: 2.75 Inch, Mark 40 and MODS, and Mark 4 and MODS
8883479	-	Box, Packing, Ammunition for Rocket Motor: 2.75 Inch, Mark 40 and MODS and Mark 4 and MODS
9298733		Fuze, Rocket, Base Detonating, M442
9327895	-	Box, Fiber, Packing, Ammunition, for Fuze, Rocket, BD, M442 and M446
9327896	-	Box, Wirebound, Packing, Ammunition, for Fuze, Rocket, BD, M442 and M446
9332266	-	Adapter, Motor
9332281	-	Pin, Shear
9335668-1	-	Adapter, Motor, M257 Warhead
9335670	-	M442 and M446 Fuze Acceleration Fixture
9335671	-	Housing, Drogue, M257 Warhead
9335672	-	M442 Test Tool
9335674-1	-	Pin, Shear
9335675	-	Plate, Pusher
9335676-6	-	O-Ring
9335677-1	-	Pad, Felt
9335677-2	-	Pad, Felt

(Copies of specifications, standards, handbooks, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets, or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS.

3.1 Material. Materials shall comply with the applicable drawings and specifications listed thereon.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 9298733 and associated drawings and with all requirements specified in applicable specifications and standards.

3.3 Molded parts. All molded parts shall be identified as to the mold cavity from which they were made.

3.4 Fuzes (less expulsion charge and less delay assembly). All fuzes, less expulsion charge, less delay assembly shall comply with MIL-F-50541 with the exception that classification of defects (CD) 4.4.2.2 and 4.4.2.3 will be deleted and applicable (CD) in Section 4 of this document will be substituted in their place.

3.5 Expulsion delay time. The expulsion delay time of the M442 Fuze shall have a minimum of 8.0 seconds and a maximum of 10.0 seconds between 50° and 90°F. The expulsion delay time shall commence upon firing of the fuze primer and end when expulsion charge fires.

3.6 Environment. The M442 Fuze shall function in compliance with the requirements in 3.5 after being subjected to the following environmental conditions.

3.6.1 High temperature. The M442 Fuze shall function as specified after subjection to high temperature (140°F), Procedure I, Method 501, of MIL-STD-810. The expulsion delay time shall be obtained for informational purposes only.

3.6.2 Low temperature. The M442 Fuze shall function as specified after subjection to low temperature (-25°F), Procedure I, Method 501, of MIL-STD-810. The expulsion delay time shall be obtained for informational purposes only.

3.6.3 Five-foot drop. The M442 Fuze shall remain safe to handle and function as specified after subjection to the 5’ drop test procedure 1 (simulated warhead drop) as specified in MIL-STD-331.

3.6.4 Vibration. The M442 Fuze shall remain safe during and function as specified after subjection to Aircraft Vibration, Method 514, as specified in MIL-STD-810 and Appendix A.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T03:50Z
Check the source to verify that this is the current version before use.

3.7 Safety tests. The M442 Fuze shall remain safe to handle and dispose of after being subjected to the following tests. The disassembled fuze shall display the following conditions:

a. No loose explosive shall be present.
b. No explosive shall have burned or detonated.
c. The rotor pin shall be in place.
d. The setback sleeve shall be in the safe position.

3.7.1 Jolt. The M442 Fuze shall be subjected to and must withstand the Jolt Test as specified in MIL-STD-331.

3.7.2 Jumble. The M442 Fuze shall be subjected to and must withstand the Jumble Test as specified in MIL-STD-331.

3.7.3 Forty-foot drop. The M442 Fuze shall be subjected to and must withstand the Forty-foot Drop Test procedure II (packaged drop) as specified in MIL-STD-331.

3.8 Workmanship. All parts and assemblies shall be free from burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, porosity, warpage, burn marks, checks, blisters, excess flash corrosion products, and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agents. Surface coating shall be continuous except for a few slight scratches not exposing base material. The loading and assembly operations shall be performed in a thorough workmanlike manner consistent with the best practices of the industry. All required marking shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are made a part of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:50Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item:

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated.

Part description	Drawing number	Quantity
Lid, Case, Fuze	9298750	5 per mold cavity
Case, Fuze	9298742	5 per mold cavity
Spacer, Fuze	9298747	25
Expulsion Charge Assembly	9298752	25
Delay Assembly	9341730	25
Fuze, Rocket, Base Detonating M442	9298733	100

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 202610-23T03:50Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
	M442 Assembly and Component				9298733
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Lid, Case, Fuze Dwg. 9298750	5/ cavity		3.1	4.4.2.1
	Case, Fuze Dwg. 9298742	5/ cavity		3.1	4.4.2.2
	Spacer, Fuze Dwg. 9298747	25		3.1	4.4.2.3
	Expulsion Charge Assembly Dwg. 9298752	25		3.1	4.4.2.4
	Delay Assembly Dwg. 9341730	25		3.1	4.4.2.5
	Fuze, Rocket, Base Detonating, M442 Dwg. 9298733	100		3.1	4.4.2.6
	Jolt Test	12		3.7.1	4.6.1
	Jumble Test	12		3.7.2	4.6.2
	Forty-Foot Drop Test	8		3.7.3	4.6.3
NOTES:					

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
	M442 Assembly and Component				9298733
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	High Temperature Test	15		3.6.1	4.6.5
	Low Temperature Test	15		3.6.2	4.6.4
	Five-Foot Drop Test	6		3.6.3	4.6.6
	Non Environmental Fuzes	30		3.1	(See Note A)
	Aircraft Vibration Test	14		3.6.4	4.6.7
	Fuze Function Test (See Note A)	80		3.1	4.5

NOTES: A. 15 Fuzes from the high temperature test plus 15 fuzes from the low temperature test, plus 6 fuzes from the Five-Foot Drop Test, plus 14 fuzes from the Aircraft Vibration Test, plus 30 non-environmental fuzes shall be subjected to the fuze function test.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T03:50Z
Check the source to verify that this is the current version before use.

4.4 Quality Conformance Inspection.

4.4.1 Inspection lot formation. Inspections lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of fuzes shall contain:

a. Metal parts (except for mechanical fuzes as described in c below) from not more than two lots with the same interfix number from one manufacturer.

b. Plastic parts from not more than two lots with the same interfix number from one manufacturer.

c. Mechanical fuzes per MIL-F-50541 from not more than one lot.

d. Delay assemblies from not more than one lot.

e. Expulsion charge assemblies from not more than one lot.

4.4.2 Examination. See MIL-A-48078. Unless otherwise specified in the Classification of Defects and Test tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70673 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9298750
4.4.2.1	Lid, Case, Fuze				NEXT HIGHER ASSEMBLY 9298733
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter of charge cavity		0.40%	3.1	Gage
Minor					
201	Outside diameter of flange		0.65%	3.1	Gage
202	Depth of charge cavity		0.65%	3.1	Gage
203	Inside diameter of charge cavity		0.65%	3.1	Gage
204	Thickness of flange		0.65%	3.1	Gage
205	Perpendicularity of outside diameter of charge cavity to flange		0.65%	3.1	Gage
206	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70673 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Case, Fuze				9298742
					NEXT HIGHER ASSEMBLY 9298733
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter at open end of case		0.40%	3.1	Gage
102	Inside diameter at base of case		0.40%	3.1	Gage
103	Depth of case		0.40%	3.1	Gage
104	Concentricity of inside diameter at end of case with outside diameter flange		0.40%	3.1	Gage
105	Outside diameter at lid interface		0.40%	3.1	Gage
106	Vent holes missing or improperly located in case		0.40%	3.1	Gage/Visual
Minor					
201	Fins missing or deformed		0.65%	3.1	Gage
202	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70673 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Spacer, Fuze				9298747
					NEXT HIGHER ASSEMBLY 9298733
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Diameter of spacer		0.65%	3.1	Gage
202	Thickness of spacer		0.65%	3.1	Gage
203	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70673 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Charge, Expulsion, Assembly				9298752
					NEXT HIGHER ASSEMBLY 9298733
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Thickness of assembly		0.40%	3.1	Gage
102	Weight		0.40%	3.1	Gage
103	Charge assembly properly seated		0.40%	3.1	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70673 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Delay Assembly				9341730
					NEXT HIGHER ASSEMBLY 9298733
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Thickness of pyrotechnic compound		0.40%	3.1	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70673 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Fuze, Rocket Base Detonating M442				9298733
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Overall length, maximum		0.40%	3.1	Gage
102	Fuze case lid flush with fuze assembly		0.40%	3.1	Visual
103	Presence of all compounds		0.40%	3.1	Visual
104	Foil disk between metal fuze component assembly and delay assembly missing		100%	3.1	Visual
105	High temperature test	15		3.6.1	4.6.5
106	Low temperature	15		3.6.2	4.6.4
107	Five foot drop test (See Notes A & B)	(See Notes A & B)		3.6.3	4.6.6
108	Aircraft vibration test	14		3.6.4	4.6.7
109	Non-environmental fuzes	(See Note B)		3.1	4.7
110	Fuze function test	80(See Note B)		3.5	4.5
Minor					
201	Marking missing or incomplete		0.65%	3.8	Visual
202	Foreign matter inside of fuze case		0.65%	3.8	Visual
203	Evidence of poor workmanship		0.65%	3.8	Visual

NOTES:
A. See 4.6.6
B. See 4.7

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.daps.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

4.5 Fuze assembly functioning test. The fuze assembly assembled in test tool (P/N 9335672) and mounted on acceleration fixture (P/N 9335670) shall be accelerated on a centrifuge to 35.0 gravities (g's) plus or minus one (1) g for a minimum of 1.5 seconds. The fuze will normally fire upon a decrease in acceleration to 15.0 g's or below after arming at 35.0 g's. After the fuze has fired, and after the required expulsion delay time has elapsed, the expulsion charge shall fire. The expulsion charge output shall shear the shear pins with such force as to break-away the insert from the motor adapter or completely expel the payload. A fuze which was armed but has not fired or a fuze that has fired, but without expulsion charge firing, shall be handled with approved safety method to prevent injury. Any fuze that fails to function or exhibits improper delay time (see 3.4 and 3.5) or fails to shear the pins, shall be classed defective.

4.6 Fuze Environmental and safety tests.

4.6.1 Jolt. The M442 Fuze shall be attached to the jolt machine in the following manner: The mounting will not be such as to support (clamp) lid relative to the case. The fuze will be clamped around its cylindrical diameter (about 1 1/2 inches) in a split-block manner. The aluminum saddle clamp will be made to produce a .0005 in. diametral interface on the plastic case of the fuze for a length of two (2) inches. The contractor may employ pins, that partially and loosely enter holes, notches, etc. to help keep the fuze in the clamp but do not support the lid relative to the case. The fuze assembly in this confinement shall be subjected to and pass the Jolt Test as specified in MIL-STD-331. The same fuze assembly shall then be subjected to the Jumble Test in 4.5.8. If one or more fuzes fail to meet the test requirements, the lot shall be rejected.

4.6.2 Jumble. The M442 Fuze without any fixturing shall be subjected to and pass the Jumble Test as specified in MIL-STD-331. If one or more fuzes fail to meet the test requirements, the lot shall be rejected.

4.6.3 Forty-foot drop. The M442 Fuze shall be assembled into simulated Warhead, 2.75 Inch Rocket, M257 Flare, inert loaded as described in Figures 1 and 2. The warhead shall be packaged and packed in accordance with Drawings 8883478 and 8883479/9230114 and subjected to and pass the Forty-foot test as specified in MIL-STD-331. The packed box shall be dropped base down only. If one or more fuzes are found to be in an unsafe condition, the lot shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

4.6.4 Low temperature. The M442 Fuze shall be subjected to and pass low temperature environment in accordance with Low Temperature Procedure I at -25°F, Method 502, of MIL-STD-810 with the exception that the time of exposure to temperature shall be a minimum of four (4) hours. The fuze shall be armed and fired in accordance with 4.5 within 5 minutes of removal from extreme temperature. The expulsion delay time shall be obtained for informational purposes only. Any fuze that fails to function, or fails to shear the pins, shall be classed defective and handled with an approved safety method to prevent injury.

4.6.5 High temperature. The M442 Fuze shall be subjected to and pass high temperature environment in accordance with High Temperature Procedure I at 140°F, Method 501, of MIL-STD-810 with the exception that the time of exposure to temperature shall be a minimum of four (4) hours. The fuze shall be armed and fired in accordance with 4.5 within 5 minutes of removal from extreme temperature. The expulsion delay time shall be obtained for informational purposes only. Any fuze that fails to function, or fails to shear the pins, shall be classed defective and handled with an approved safety method to prevent injury.

4.6.6 Five-foot drop. A random sample of six (6) M442 Fuzes shall be selected and subjected to the test as specified in MIL-STD-331 with the following conditions.

a. The fuze will be assembled into simulated M257 Flare Warhead, inert loaded, as described in Figures 1 and 2 and with impact orientation of the warhead for the drop test as follows:

(1) Major axis 45° from vertical nose down


(2) Major axis vertical nose down

Three (3) fuzes each must be dropped in each of the above orientations. No fuze shall be subjected to more than one drop. If one or more fuzes are found to be in an unsafe condition after the test, the lot shall be rejected.

b. Acceptable fuzes from the five-foot drop test shall be subjected to the fuze function test specified in 4.5. Any fuze that fails to comply with the requirements specified in 4.5 shall be classed defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

NOTES:
1-SPEC MIL-A-2550 AND ANSI Y14.5-1973 APPLY.
2-MATERIAL: ALUMINUM: TEMPER 7075-T6, T62, T73.
ASTM B210-82.

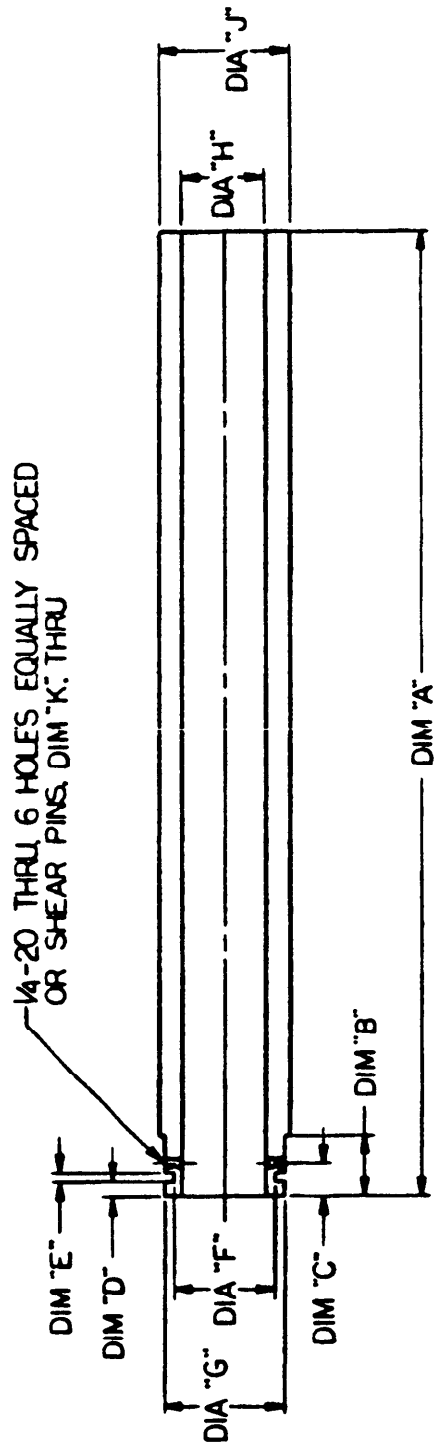

TABLE

PART NO.	WARHEAD (FUZE)	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"	DIA "F"	DIA "G"	DIA "H"	DIA "J"	DIM "K"	WT. LBS
9357967-1	M257 (M442)	26.45	.995 +.010	.610 +.005	.258 +.005	.140 +.005	2.413 -.004	2.572 -.003	1 3/4	2 3/4	.126 +.002	92

FIGURE 1. Inert weight

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

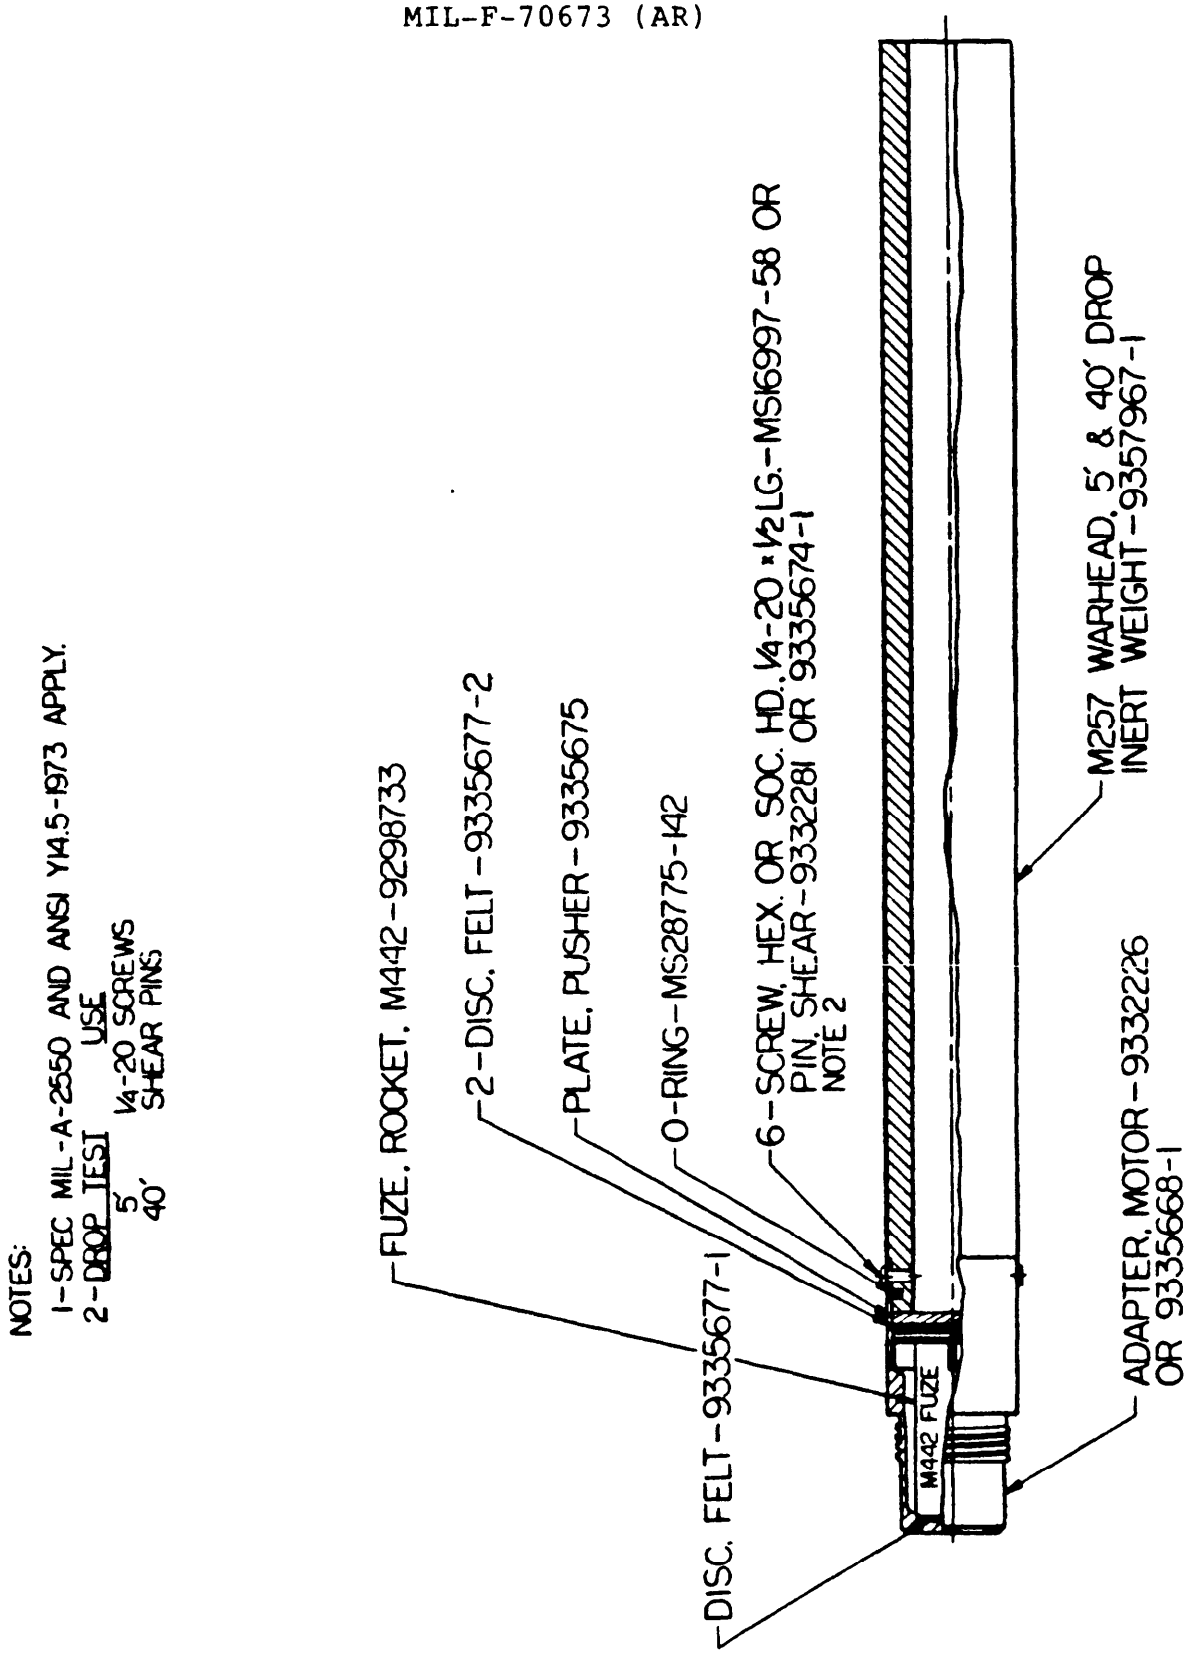


FIGURE 2. Simulated M257 Flare Warhead

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

c. The Five-foot drop test shall be performed until two (2) consecutive lots have complied with the acceptance criteria specified. After satisfying this requirement, the five-foot drop test shall be performed on every subsequent third lot only. Should the lot fail the acceptance criteria, the contractor shall be required to return to the two (2) consecutive lot procedures above.

4.6.7 Vibration. The M442 Fuze shall be attached to the vibration machine by means of a Government approved fixture which simulates enclosure in the Warhead, 2.75 Inch Rocket, M257 Flare. The fuze in this confinement shall be subjected to Aircraft Vibration in accordance with MIL-STD-810, Method 514, Curve - see Appendix A. The fuze shall then be removed from the fixture and tested in accordance with 4.5. Any fuze that fails the requirements shall be classed defective.

4.7 Production acceptance criteria. The sample fuzes from the high temperature, low temperature, five-foot drop, aircraft vibration, and non-environmental tests shall be combined into one sample of eighty (80) fuzes and subjected to the fuze function test specified in 4.5. The fuze lot shall be rejected if two or more fuzes fail to function or fail to shear the pins or if one *or* more fuzes fail to meet the expulsion delay time requirement. In the event the contractor is relieved of performing the five-foot drop test for any production lot after satisfying the requirement per 4.6.6.C, the sample size for the non-environmental test shall be increased to a total of thirty-six (36) fuzes to effect again a production acceptance sample of eighty (80) fuzes when combined with sample fuzes from the high temperature, low temperature, aircraft vibration tests. This sample of eighty fuzes shall be subjected to the fuze function test with acceptance criteria specified above.

5. PACKAGING.

5.1 Preservation and packaging.

5.1.1 Level A. Not applicable.

5.1.2 Level B. Not applicable.

5.1.3 Level C. The M442 fuze shall be packaged IAW Drawing 9327895.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

5.2 Packaging and marking.

5.2.1 Level A. Not applicable.

5.2.2 Level B. Not applicable.

5.2.3 Level C. The M442 fuze, packaged as per 5.1.3 above, shall be packed and marked IAW Drawings 9327896 and 8796522.

6. NOTES.

6.1 Intended use. The components covered by this specification are intended for use in the 2.75 Inch Rocket System.

6.2 Ordering data. See MIL-A-48078.

6.3 Data cards. See MIL-A-48078.

6.4 Submission of design for approval. See MIL-A-48078. Submit equipment designs as required to: Commander, AMCCOM, ATTN: AMSMC-QAF-I(D), Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, DI-R-1714 will apply.

6.5 Subject term (key word) listing.

Military specification
Fuze
Warhead, Flare
Rocket (2.75 Inch)

Custodian:
Army-AR

Preparing activity:
Army-AR


(Project 1340-A749)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

APPENDIX A

HELICOPTER VIBRATION

One 15 minute sinusoidal sweep (5-500-5 Hz) shall be performed for each of three axes. No dwell time shall be spent on any one frequency. A search for resonance shall not be done.

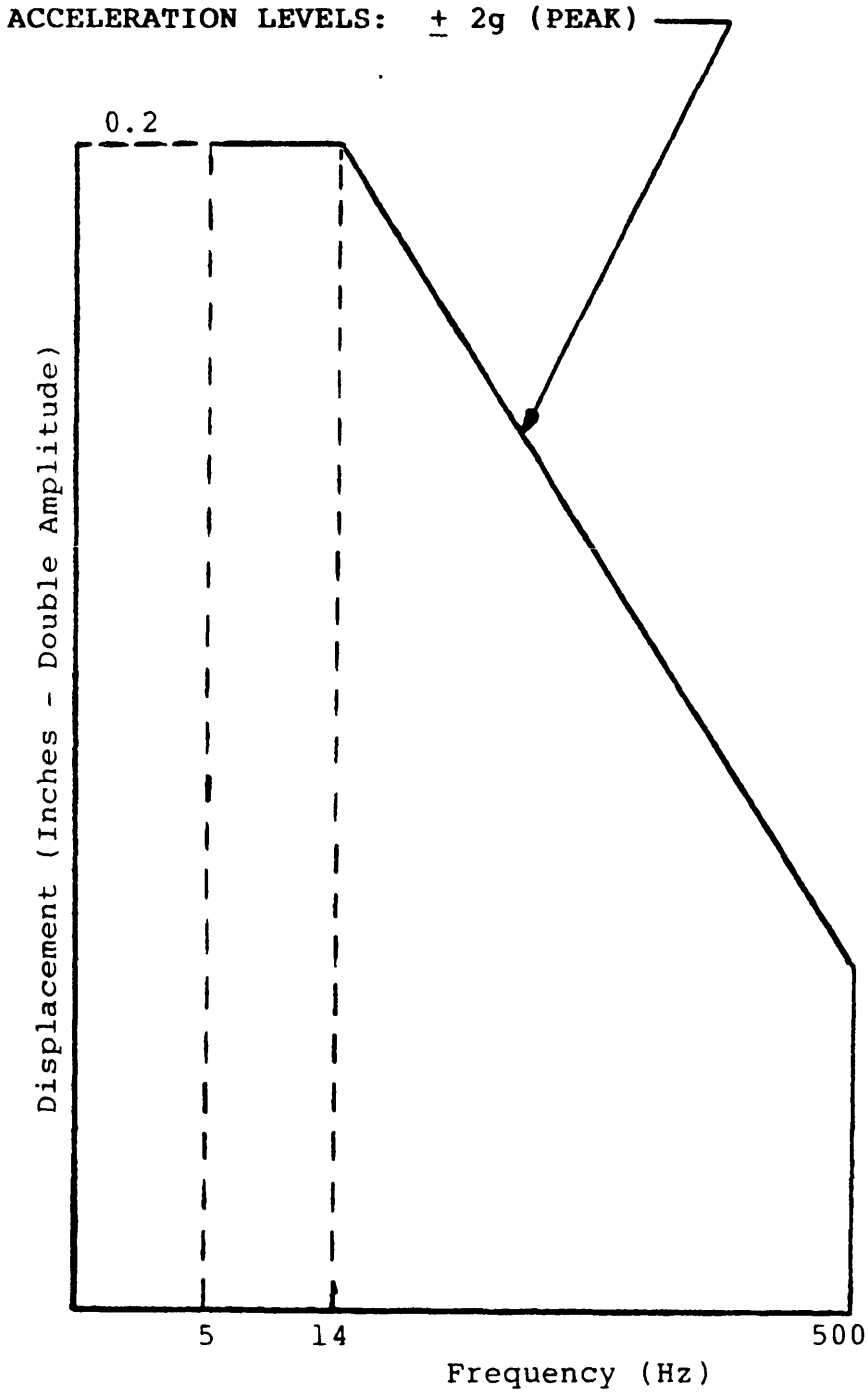

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
ARDEC
ATTN: AMSMC-QA
PICATINNY ARSENAL, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-F-70673	FUZE, ROCKET, BASE DETONATING, M442

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:50Z
Check the source to verify that this is the current version before use.