
MILITARY SPECIFICATION SHEET


RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE, INCLUDING INSPECTIONS OF APPENDIXES A AND B

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-39016.

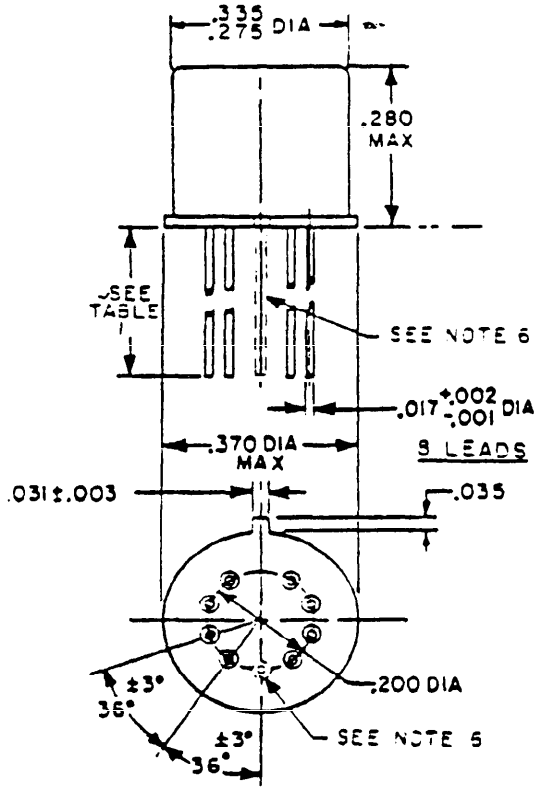

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.017	0.43
.031	0.79
.035	0.89
.200	5.08
.275	6.98
.280	7.11
.335	8.51
.370	9.40

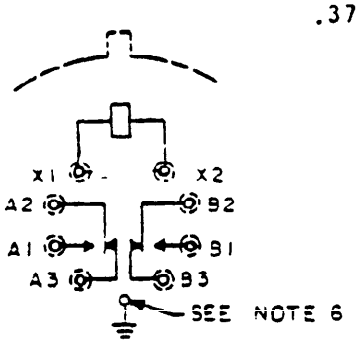


CIRCUIT DIAGRAM
TERMINAL VIEW

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Coil symbol optional in accordance with MIL-STD-1285.
5. Circuit diagram shown on part is the terminal view.
6. The grounding pin shown is a noninsulated case ground (see table I for applicable dash numbers).

FIGURE 1. Dimensions and configuration (round).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-21T17:54Z
Check the source to verify that this is the current version before use.

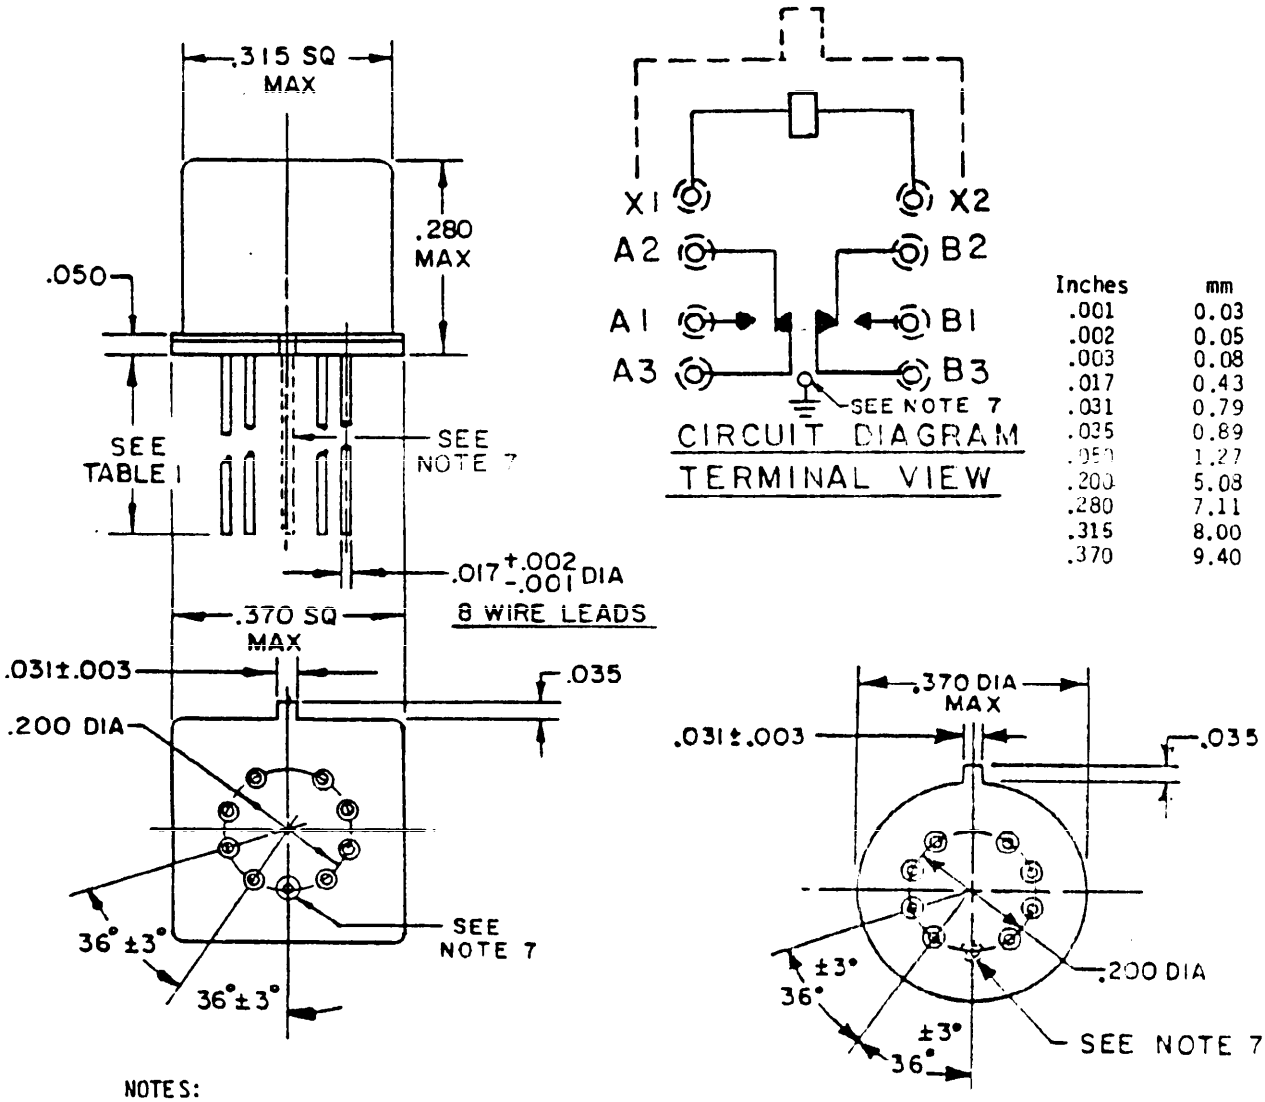


Inches	mm
.001	0.03
.002	0.05
.003	0.08
.017	0.43
.031	0.79
.035	0.89
.050	1.27
.200	5.08
.280	7.11
.315	8.00
.370	9.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Coil symbol optional in accordance with MIL-STD-1285.
5. Circuit diagram shown on part is the terminal view.
6. Shape optional within the envelope dimension.
7. The grounding pin shown is a noninsulated case ground (see table I for applicable dash numbers).

FIGURE 2. Dimensions and configuration (square or round).

Source: https://assist.dla.mil -- Downloaded: 202610-21T17:54Z
Check the source to verify that this is the current version before use.

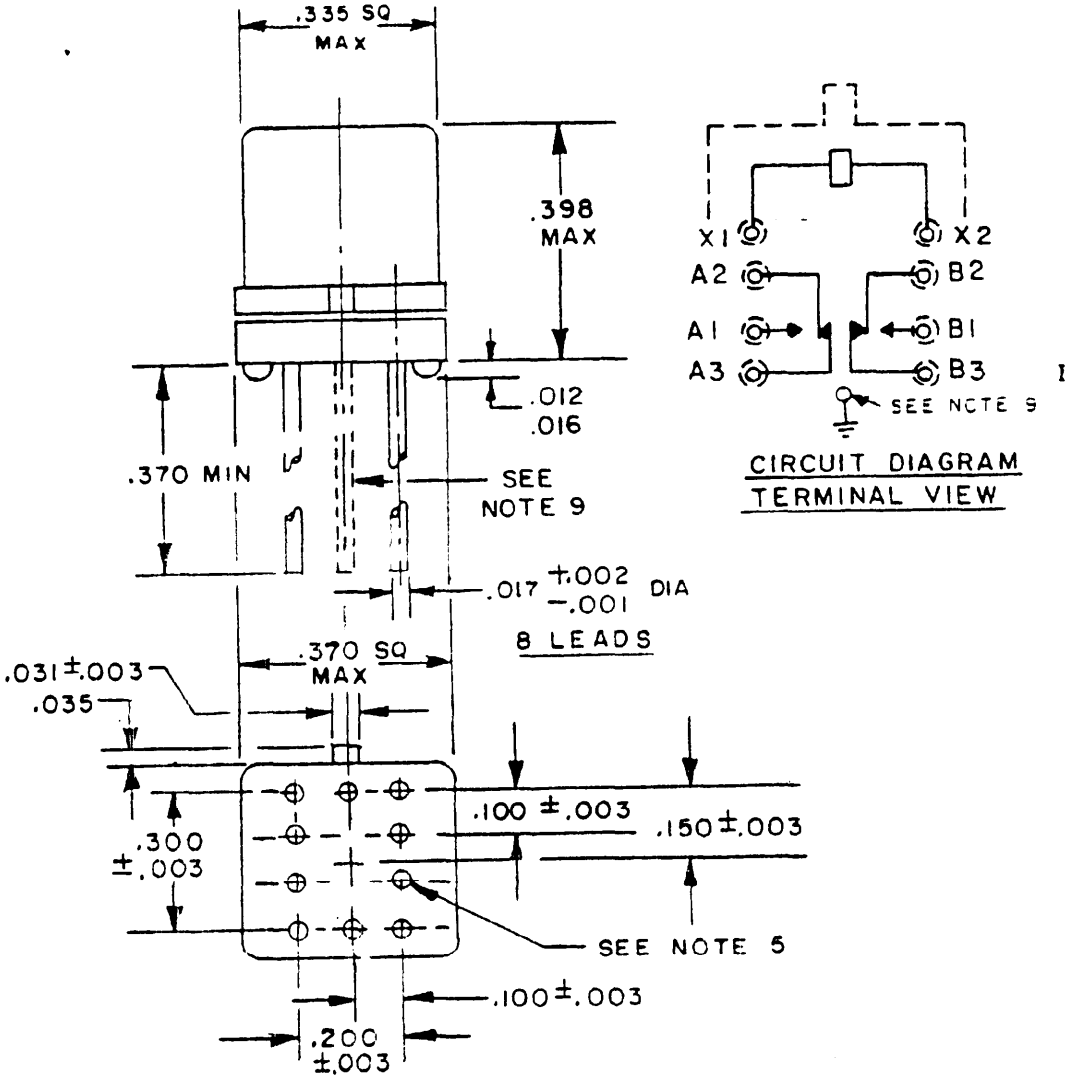

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.012	0.30
.016	0.41
.017	0.43
.031	0.79
.035	0.89
.100	2.54
.150	3.81
.200	5.08
.300	7.62
.335	8.51
.370	9.40
.398	10.11

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Spreader pads shall be certified to MIL-M-38527, M38527/05-003, or M38527/05-013.
5. Dimensions are tolerance shown for the bottom view of the spreader pad are for the center to center location of the holes in the speader pad.
6. Shape optional within the envelope dimension.
7. Coil symbol optional in accordance with MIL-STD-1285.
8. Circuit diagram shown on part is the terminal view.
9. The grounding pin shown is a noninsulated case ground (see table I for applicable dash numbers).

FIGURE 3. Dimensions and configuration relay with spreader pad attached.

Source: https://assist.dla.mil -- Downloaded: 202610-21T17:54Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Cleaning and small particle inspection: Applicable.

CONTACT DATA:

Load ratings:

High level (relay case grounded):

Resistive: 1.0 ampere at 28 V dc.

500 milliamperes at 115 V ac 400 Hz case not grounded.

250 milliamperes at 115 V ac 60 Hz case not grounded.

100 milliamperes at 115 V ac 60 and 400 Hz case grounded.

Inductive load: 0.2 ampere at 28 V dc with 0.32 henry inductance.

Lamp: 0.10 ampere at 28 V dc.

Low level: 10 to 50 µA at 10 to 50 mV dc or peak ac.

Intermediate current: Applicable.

Contact resistance or voltage drop:

Initial: 0.10 ohm maximum (0.125 ohm maximum with spreader pad attached).

High level:

During life: Not more than 5 percent of open circuit voltage.

After life: 0.20 ohm maximum (0.225 ohm maximum with spreader pad attached).

Low level:

During life: 33 ohms maximum.

After life: 0.15 ohm maximum (0.175 ohm maximum with spreader pad attached).

Intermediate current:

During: 1 ohm maximum.

After: 0.20 ohm maximum (0.225 ohm maximum with spreader pad attached).

Contact bounce: 1.5 milliseconds (ms) maximum (applicable for after high level rated load life and intermediate current tests).

Contact stabilization time: 2.0 milliseconds maximum.

Overload (high level only): Two times rated current.

COIL DATA: See table I.

Operate time: 2.0 ms maximum over temperature range with rated coil voltage.

Release time: 1.5 ms maximum over temperature range from rated coil voltage.

Source: https://assist.dla.mil -- Downloaded: 202610-21T17:54Z
Check the source to verify that this is the current version before use.

ELECTRICAL DATA:

Insulation resistance: 10,000 megohms minimum at 500 V dc, except the resistance between coil and case at high temperature shall be 1,000 megohms minimum.

Dielectric withstanding voltage:

	Sea level V rms (60 Hz)	Altitude V rms (60 Hz)
Between case, frame, or enclosure and all contacts both in the energized and deenergized positions	500	125 All terminals to case
Between case, frame, or enclosure and coil(s)	500	
Between all contacts and coil(s)	500	
Between open contacts in the energized and deenergized positions	500	
Between contact poles	500	
Between coils of dual coil relays	500	

ENVIRONMENTAL DATA:

Temperature range: -65°C to +125°C.

Vibration (sinusoidal): MIL-STD-202, method 204. Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts.

Vibration (random): MIL-STD-202, method 214, test condition IG. Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts. Applicable to qualification, group C, and group A inspection testing.

Shock (specified pulse): MIL-STD-202, method 213, test condition B (75 g's). Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts.

Magnetic interference: Applicable.

Resistance to soldering heat: Applicable.

Acceleration: Applicable.

Salt atmosphere (corrosion): In accordance with method 1041, MIL-STD-750.

Particle impact noise detection: Applicable.

PHYSICAL DATA:

Terminals:

Terminal strength: Test condition A, 1 pound pull minimum.

Bend test: Test condition C, 1/2 pound load.

Source: https://assist.dla.mil -- Downloaded: 202640-21T17:54Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics 1/

Dash numbers 2/						Coil voltages (V dc) 3/		At +25°C				Over temperature range		
Lead length .187 +.040 -.010	Lead length .500 min	Spreader pads 4/	Lead length .500 min with ground	Spreader pads with ground 4/	Fig.	Rated	Max	Coil resistance ohms ±10%	Specified pickup value (voltage) (V dc)	Specified hold value (voltage) (V dc)	Specified dropout value (voltage) (V dc)	Specified pickup value (voltage) (V dc)	Specified hold value (voltage) (V dc)	Specified dropout value (voltage) (V dc)
001	002	---	003	---	1	5.0	5.8	50	2.7	1.4	0.22	3.5	2.3	0.14
004	005	---	006	---	1	6.0	8.0	98	3.5	2.0	0.28	4.5	3.2	0.18
007	008	---	009	---	1	9.0	12	220	5.3	3.0	0.54	6.8	4.9	0.35
010	011	---	012	---	1	12	16	390	7.0	4.0	0.63	9.0	6.5	0.41
013	014	---	015	---	1	18	24	880	10.5	6.0	0.91	13.5	10.0	0.59
016	017	---	018	---	1	26.5	32	1,560	14.2	8.0	1.37	18.0	13.0	0.89
019	020	---	021	---	1	30.0	36	2,500	17.7	10.0	1.50	22.0	16.0	1.0
022	023	---	024	---	2	5.0	5.8	50	2.7	1.4	0.22	3.5	2.3	0.14
025	026	---	027	---	2	6.0	8.0	98	3.5	2.0	0.28	4.5	3.2	0.18
028	029	---	030	---	2	9.0	12	220	5.3	3.0	0.54	6.8	4.9	0.35
031	032	---	033	---	2	12	16	390	7.0	4.0	0.63	9.0	6.5	0.41
034	035	---	036	---	2	18	24	880	10.5	6.0	0.91	13.5	10.0	0.59
037	038	---	039	---	2	26.5	32	1,560	14.2	8.0	1.37	18.0	13.0	0.89
040	041	---	042	---	2	30.0	36	2,500	17.7	10.0	1.50	22.0	16.0	1.0
---	---	043	---	044	3	5.0	5.8	50	2.7	1.4	0.22	3.5	2.3	0.14
---	---	045	---	046	3	6.0	8.0	98	3.5	2.0	0.28	4.5	3.2	0.18
---	---	047	---	048	3	9.0	12	220	5.3	3.0	0.54	6.8	4.9	0.35
---	---	049	---	050	3	12	16	390	7.0	4.0	0.63	9.0	6.5	0.41
---	---	051	---	052	3	18	24	880	10.5	6.0	0.91	13.5	10.0	0.59
---	---	053	---	054	3	26.5	32	1,560	14.2	8.0	1.37	18.0	13.0	0.89
---	---	055		056	3	30.0	36	2,500	17.7	10.0	1.50	22.0	16.0	1.0

1/ Each relay possesses high level and low level capabilities. However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuits not recommended for subsequent use in low level applications.
2/ The suffix letter M, P, or R to designate the applicable failure rate level shall be added to the applicable listed dash number. Failure rate level (percent per 10,000 cycles): M, 1.0; P, 0.1; R, 0.01. Example, 007M - - - - 018R.
3/ Caution: The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
4/ Relays supplied with spreader pads (-043 through -056) shall have the pad rigidly attached.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:54Z
Check the source to verify that this is the current version before use.

Terminal twist test: As specified in MIL-R-39016.

Solderability: Applicable.

Dimensions and configurations: See figures 1, 2, and 3.

Weight: 2.55 grams (0.09 ounce) maximum, 2.80 grams (0.099 ounce) maximum with spreader pad attached.

Seal: Hermetic, adjunct sealant shall not be used.

Internal moisture: Applicable.

Minimum marking: Military PIN, "J" with the date code (example J8830), circuit diagram, manufacturer's name or source code.

LIFE TEST REQUIREMENTS:

High level: 100,000 cycles per relay.

Low level: 100,000 cycles plus 900,000 cycles mechanical life.

Part or Identifying Number (PIN): M39016/609- (dash number from table I and suffix letter designating failure rate level).

QUALIFICATION INSPECTION:

Qualification inspection and sample size: See table II.

Failure rate qualification: The manufacturer shall qualify his products to failure rate level "M" initially.

TABLE II. Qualification inspection and sample size. 1/

Single submission	Group submission	
33 units plus 1 open unit for level M at C = 0 2/ Qualification inspection as applicable	M39016/609-017 or M39016/609-038	33 units plus 1 open unit for level M at C = 0 2/ Qualification inspection as applicable
	M39016/609-002 M39016/609-005 M39016/609-008 M39016/609-011 M39016/609-014 M39016/609-020	2 units each PIN Qualification inspection, group I, group II
	M39016/609-018	1 unit terminal strength and solderability
	M39016/609-053 M39016/609-054 or M39016/609-023 M39016/609-026 M39016/609-029 M39016/609-032 M39016/609-035 M39016/609-041	2 units each PIN 3/ 2 units each PIN Qualification inspection, group I, group II
	M39016/609-039	1 unit terminal strength and solderability
	M39016/609-053 M39016/609-054	2 units each PIN 3/

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:54Z
Check the source to verify that this is the current version before use.

1/ For retention of qualification or extension of qualification to lower failure rate levels, all life test data accumulated on (or specified in) MIL-R-39016/9, MIL-R-39016/615, and MIL-R-39016/620 may be used in addition to MIL-R-39016/609. Prior to performance of retention of qualification testing, the relay manufacturer shall preselect the sampling plan.

2/ The number of units required for qualification testing shall be increased as required in group V, table II, MIL-R-39016, if the contractor elects to test the number of units permitting one or more failures. Prior to performance of qualification testing, the relay manufacturer shall preselect the sampling plan.

3/ Qualification inspection of relays supplied with spreader pads shall be tested as specified in the qualification inspection table of MIL-R-39016 in the order shown below:

Before installation of the pad:

Vibration (sine sinusoidal) test duration shall be 10 minutes, vibration (random), p[illegible]cle impact noise detection, screening.

After installation of the pad:

Insulation resistance, dielectric withstanding voltage, static contact resistance, specified pickup, hold, and dropout values (voltages), coil resistance, operate and release time, contact dynamic characteristics, coil transient suppression (when specified), solderability, seal, visual and mechanical inspection (external).

Group A inspection: Group A inspection for relays supplied with spreader pads (-043 through -056) shall be as specified below:

Before installation of the pad: Perform subgroups 1 and 2 of the group A inspection table.

After installation of the pad: Perform subgroups 3 and 4 of the group A inspection table.

Qualification inspection (reduced testing) and sample size: If the relays produced for MIL-R-39016/609 are similar in construction and design, except for the additional inspections specified herein, to the relays produced for MIL-R-39016/9, then reduced testing may be performed concurrent with or subsequent to successful qualification of MIL-R-39016/9 at the "M" failure rate level. See table III.

TABLE III. Qualification inspection (reduced testing).

Examination or test
2 units each coil voltage, group A inspection table. 1 unsealed sample unit for internal examination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:54Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS
Air Force - 99
DLA - ES
NSA - NS

User activities:
Army - AR
Navy - MC, OS, SH
Air Force - 11, 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5945-0766-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:54Z
Check the source to verify that this is the current version before use.