MILITARY SPECIFICATION

RESISTORS, FIXED, FILM, (INSULATED),

ESTABLISHED RELIABILITY

STYLE RLR42

THIS SPECIFICATION INACTIVE FOR DESIGN AFTER DATE OF THIS SPECIFICATION (SEE 6.2). USE MIL-R-22684/8.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the detail requirements for style RLR42, established reliability, insulated, film, fixed resistors.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following document, of the issue in effect on date of invitation for bids or request for proposal, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-R-39017 - Resistors, Fixed, Film, (Insulated), Established Reliability, General Specification for.

(Copies of specification, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-R-39017, and as specified herein.

3.2 Design and construction. Resistors shall be of the design, construction, and physical dimensions specified on figure 1.

3.3 Power rating. The power rating shall be 2 watts.

3.4 Voltage rating. The continuous working voltage shall not exceed 500 volts.


Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Research and Development Command, ATTN: DELET-RP, Fort Monmouth, NJ 07703 by using the self-addressed Standardization Document Improvement Proposal (DD 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-21T17:59Z
Check the source to verify that this is the current version before use.

3.5 Resistance. Minimum and maximum resistance values shall be as follows:

Minimum resistance - 10.0 ohms.
Maximum resistance - 2.7 megohms.

3.6 Maximum weight. The maximum weight shall not exceed 3 grams.

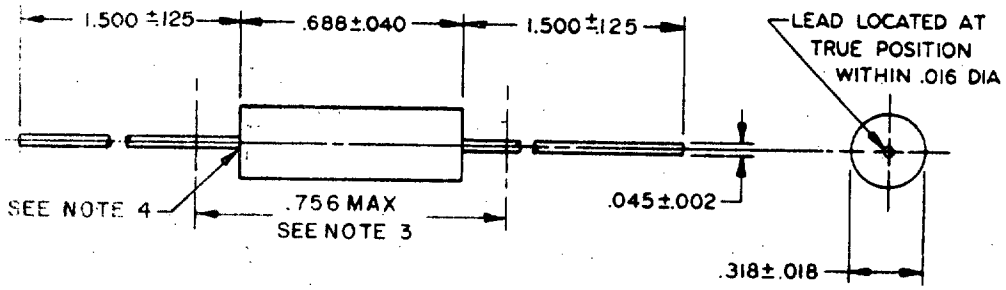

INCHES	MM
.002	.05
.016	.41
.018	.46
.040	1.02
.045	1.14
.125	3.18
.318	8.08
.688	17.48
.756	19.20
1.500	38.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Maximum length is 'clean lead' to 'clean lead'.
4. The end of the body shall be that point at which the body diameter equals the nearest drill size larger than 250 percent of the nominal lead diameter.

FIGURE 1. Style RLR42 resistor.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with MIL-R-39017.

4.2 Power conditioning. The maximum voltage applied shall not exceed 500 volts, ac or dc.

4.3 Dielectric withstanding voltage. The test voltages applicable to style RLR42 are as follows:

Atmospheric pressure - 1,000 volts rms.
Barometric pressure - 350 volts rms.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-R-39017.

6. NOTES

6.1 Notes. The notes specified in MIL-R-39017 are applicable to this specification.

* 6.2 MIL-R-22684 substitution data. The resistors specified herein are not for use in design after the date of this specification. Resistors specified in MIL-R-22684/8 are substitutes for the inactivated resistors of the same resistance value (through and including 1.5 megohm) and tolerance regardless of failure rate designation.

Source: https://assist.dla.mil -- Downloaded: 202610-21T17:59Z
Check the source to verify that this is the current version before use.

6.3 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army - MI, AR, ER
Navy - EC, AS, OS
Air Force - 11, 17, 85
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, CG
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5905-0947-3)

Source: https://assist.dla.mil -- Downloaded: 202610-21T17:59Z
Check the source to verify that this is the current version before use.