MILITARY SPECIFICATION

ASSEMBLY, KLYSTRON POWER SUPPLY: 10548905

This Amendment forms a part of Military Specification MIL-A-50655(MU) dated 15 April 1971.

PAGE 2

Under Drawings. Delete:

"F10548009 PRF Counter, Electronic"
"C9115C6006 Connector, HV Miniature"
"C10548899 Holder, Connector"

PAGE 5

Table I - Under Characteristics and Location. Change:

From: "5.8 ± 0.3 Vdc. When the board assembly output terminals are connected to the test fixture as shown in 4.5.2.3."


To: "5.8 ± 0.3 Vdc."

From: "J2C(+) and J2B(-)."
To: "E2(+) and E3(-), Figure 2."


PAGE 6

Figure 1. Board Assembly Test Setup. Change:

From:

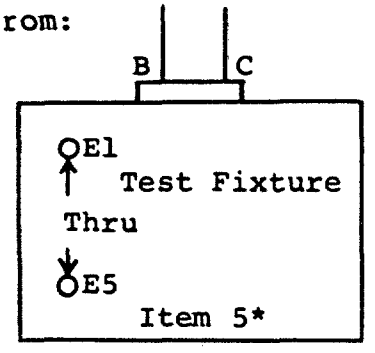

To:

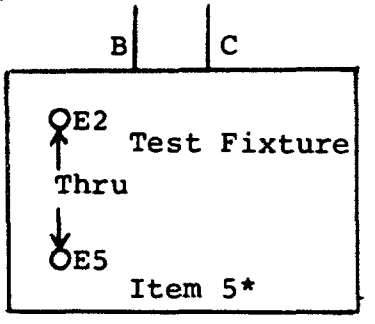


FSC 1285

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.


PAGE 11

Figure 2. Test Fixture Setup. Change:

From:

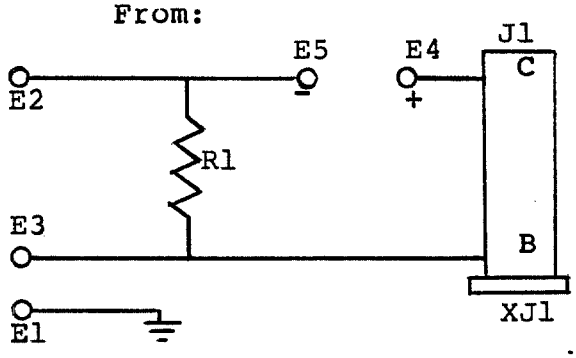

To:

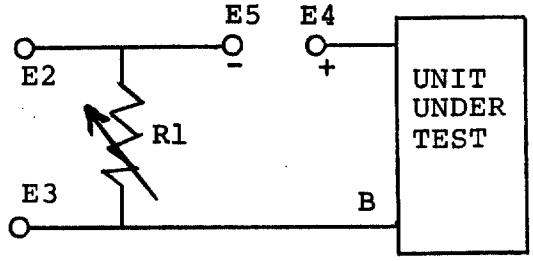

PAGE 12

Table VI. Under Designation, Part & Description. Delete:

"E1	E.F. Johnson 111-103	Binding post (black)"
"J1	9115C6006	Connctor, HV miniature"
"XJ1	10548899	Holder Connector"

PAGE 13

Paragraph 4.6.3.1. Delete and Substitute new Paragraph:

"4.6.3.1 Output voltage. Using square-wave generator, Item 1, apply 16 V peak-to-peak square wave in accordance with Table I and Figure 1. Using ammeter, Item 3, adjust variable resistor R1 to obtain a load current between E5(-) and E4(+) as specified in 3.5.1. Using voltmeter, Item 4, verify that the output voltage at E2(+) and E3(-) is as specified in Table I."

Paragraph 4.6.3.2. Second Line. Change:

From: "between J1-C and J1-B (common)."
To: "between E4 and E3 (common)."

Custodian:

Army - AR

Preparing Activity:

Army - AR

Project No. 1285-A508

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/1963

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.