MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, NON-ENVIRONMENTAL, STRAIGHT, SHIELD TERMINATION, CATEGORY 3B (FOR MIL-C-83733 CONNECTORS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the accessories described herein shall consist of this document and the latest issue of Specification MIL-C-85049.

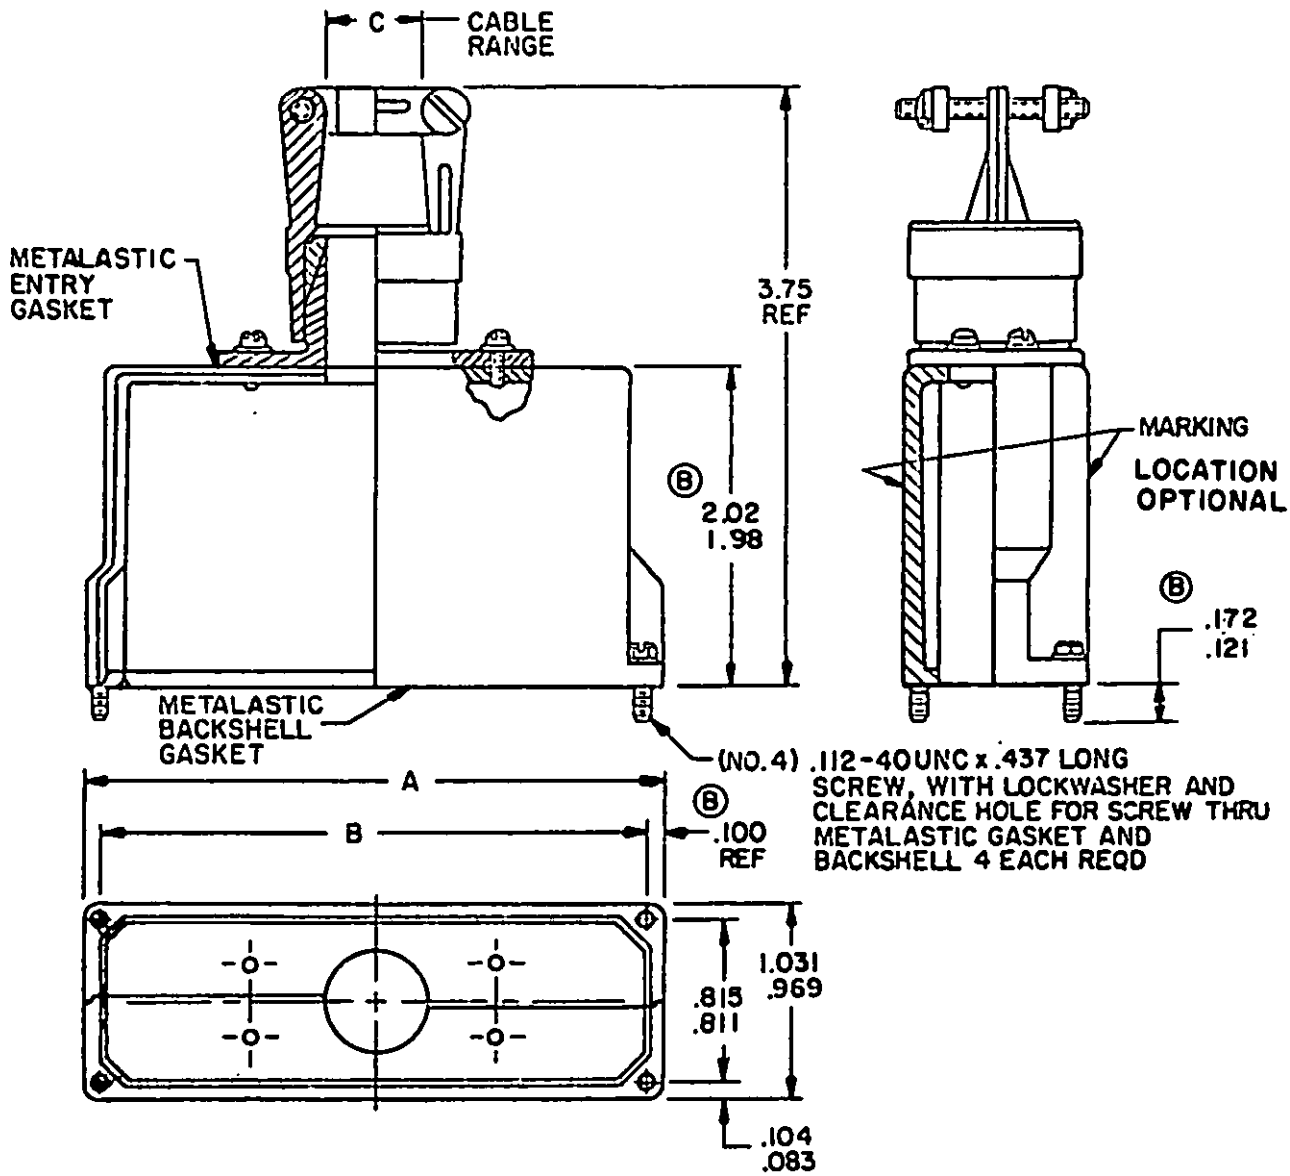


FIGURE 1. Configurations and dimensions

Ⓑ DENOTES CHANGES


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

FSC 5935


INCHES	MM
.02	.5
.083	2.11
.104	2.64
.112	2.84
.312	7.92
.811	20.60
.815	20.70
.969	24.61
1.031	26.19
2.00	50.8
3.75	95.2

Part number	Dimensions			
	Shell size	A Max	B (B)	C
M85049/28-1	A	2.126 (54.00)	1.900 (48.26) 1.890 (48.01)	.625 (15.88) 1/ .500 (12.70)
M85049/28-2	A	2.126 (54.00)	1.900 (48.26) 1.890 (48.01)	.750 (19.05) 2/ .625 (15.88)
M85049/28-3	B	3.426 (87.02)	3.200 (81.28) 3.190 (81.03)	.625 (15.88) 1/ .500 (12.70)
M85049/28-4	B	3.426 (87.02)	3.200 (81.28) 3.190 (81.03)	.750 (19.05) 2/ .625 (15.88)


1/ Standard cable entry.
2/ Oversize cable entry.

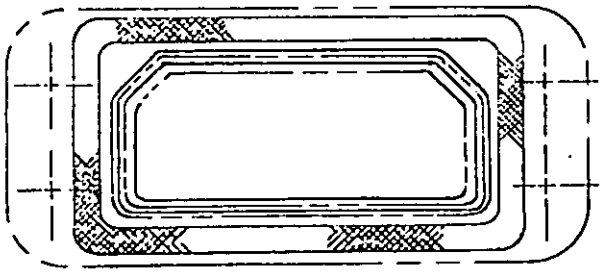

RFI SHELL GROUNDING GASKET
(MONEL MESH)

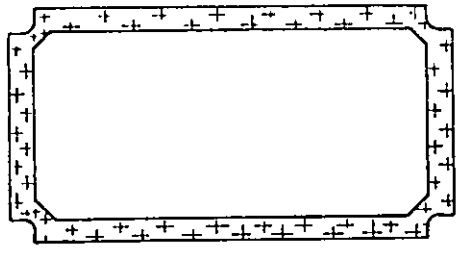

GASKET, BACKSHELL
(METALASTIC)



GASKET ENTRY
(METALASTIC)

NOTES:
1. Dimensions are in inches.
2. Dimensions apply after plating.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Metric equivalents are in parentheses.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.

RFI gaskets (metalastic and monel mesh) are to be supplied and perform RFI shielding function.

RFI gaskets (metalastic) shall be manufactured to fit accessory assembly.

RFI gasket (monel mesh) shall be manufactured to fit associated connector receptacle shell.

Material:
Shell - aluminum alloy in accordance with MIL-C-85049.
Screws - 300 series stainless steel.

Finish:
Shell - 1/ N
Screws - Passivate

Part number: See figure 1.

Qualification: See MIL-C-85049, category 3B, Cable pullout, coupling thread strength, external bending moment, and safety wire holes not applicable.

QPL evaluating activity: AFALD/PTS, GENTILE AFS, OH 45444.
Suppression data:

M83733/15 - * M85049/28 - *

Dash number

1/ Not for Navy use.

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

Preparing activity:
Air Force - 85

(Project 5935-3286)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.