
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, STRAIN RELIEF,
STRAIGHT, NONMETALLIC, CATEGORY 4C
(FOR MIL-C-27599 SERIES I AND MIL-C-38999 SERIES I AND II CONNECTORS)

(A) INACTIVE FOR A/P FORCE AND NAVY NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT.

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

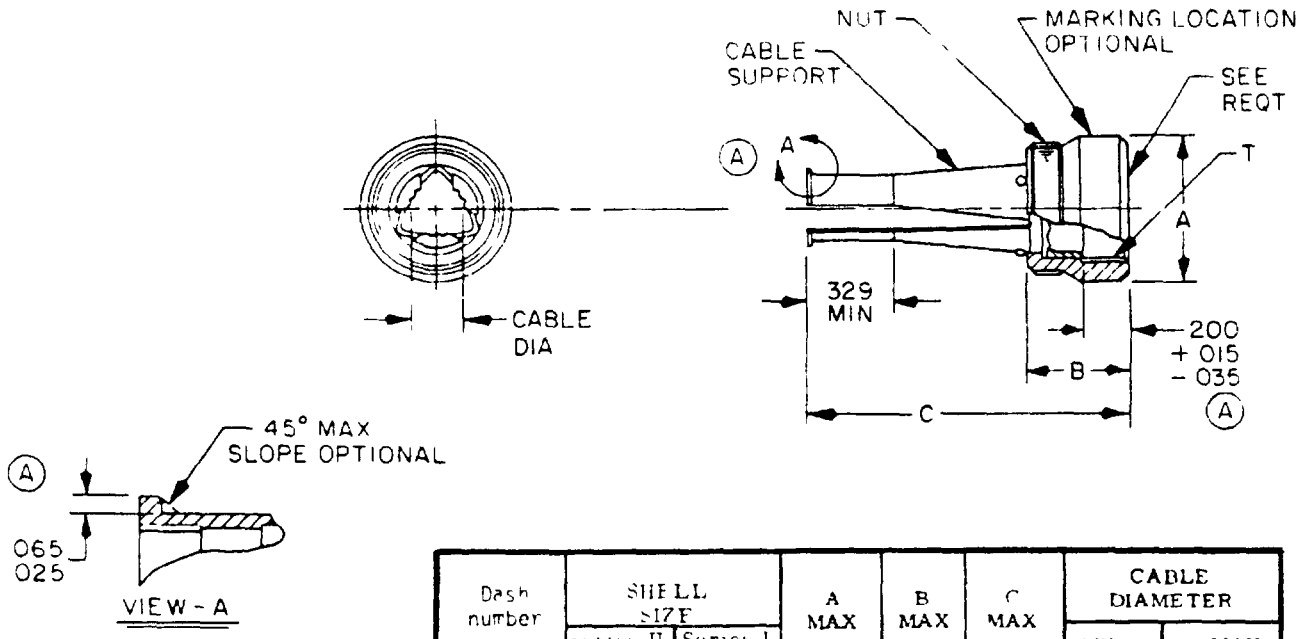

Dash number	SHELL SIZE		A MAX	B MAX	C MAX	CABLE DIAMETER	
	Series II	Series I				MIN	MAX
8	-	9	578	422	1 344	094	203
10	10	11	703	422	1 344	141	250
12	12	13	828	422	1 344	172	323
14	1	15	953	422	1 344	203	422
16	16	17	1 078	422	1 344	234	500
18	18	19	1 203	422	1 344	265	562
20	20	21	1 328	422	1 422	297	625
22	22	23	1 453	422	1 422	328	703
24	24	25	1 578	344	1 422	359	765

FIGURE 1 Configurations and dimensions

(A) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.015	38	.250	6 35	500	12.70	1.000	25.40
.035	.89	.265	6.73	.562	14.27	1.078	27.38
.065	1.65	.297	7.54	.578	14 68	1.203	30.56
094	2.39	.323	8.20	.625	15.88	1.328	33.73
.141	3.58	.328	8.33	.688	17.48	1.344	34.14
172	4.37	.329	8.36	.703	17.86	1.392	35 36
.200	5.08	.344	8.74	.765	19.43	1.422	36 12
.203	5.16	359	9.12	828	21.03	1 453	36 91
.234	5.91	.422	10.72	953	24.21	1.578	40.08

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3 Dimensions apply after plating

FIGURE 1 Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1.

Interface dimensions shall conform to MIL-C-38999.

Material

Nut Aluminum alloy in accordance with MIL-C-85049.

Cable support Nonmetallic.

Finish, nut A, W.

Temperature rating

a. -65°F to +250°F continuous.


b. +345°F for 10 minute intervals.

c +420°F for 1 minute intervals

d. Estimate cumulative life, 24 hours at 345°F and 7 hours at 420°F.

Position of slots relative to opposite opening is optional.

Part number. See example below.

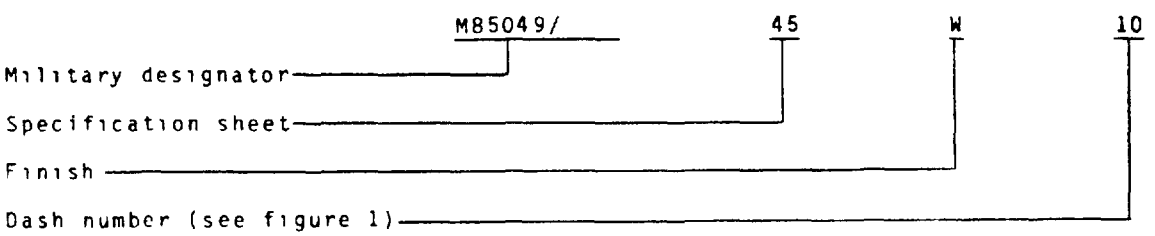


Qualification

See MIL-C-85049, category 4C.

Bending moment not applicable.

Ⓐ QPL evaluating activity Naval Avionics Center, Code D/714 , 6000 East 21st Street, Indianapolis, Indiana 46218.

Supersession data

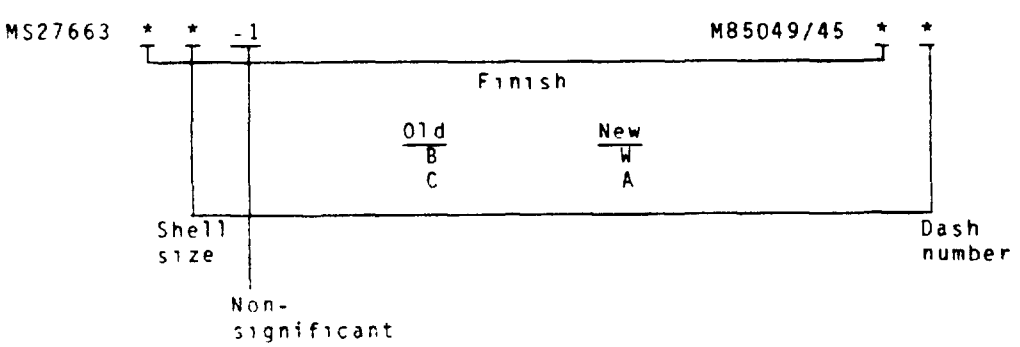

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.

Custodians
Army - CR
Navy - AS
Air Force - 85

Review activities
Army - MI, AR
Navy - EC
Air Force - 11, 15, 17, 19, 99
DLA - ES

Agent:
DLA - ES

Preparing activity
Air Force - 85

(Project 5935-3321-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:12Z
Check the source to verify that this is the current version before use.