MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (NARROW FLANGE MOUNT, BAYONET COUPLING, PREWIRED PIN CONTACT), (SERIES I, CLASSES A, G, AND R (SHELL SIZE 8 FOR INSERTS 8-2, 8-3, AND 8-4 ONLY))

Ⓐ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Ⓐ The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-26482.

Ⓐ INACTIVE. NO SUPERSEDING DOCUMENT.

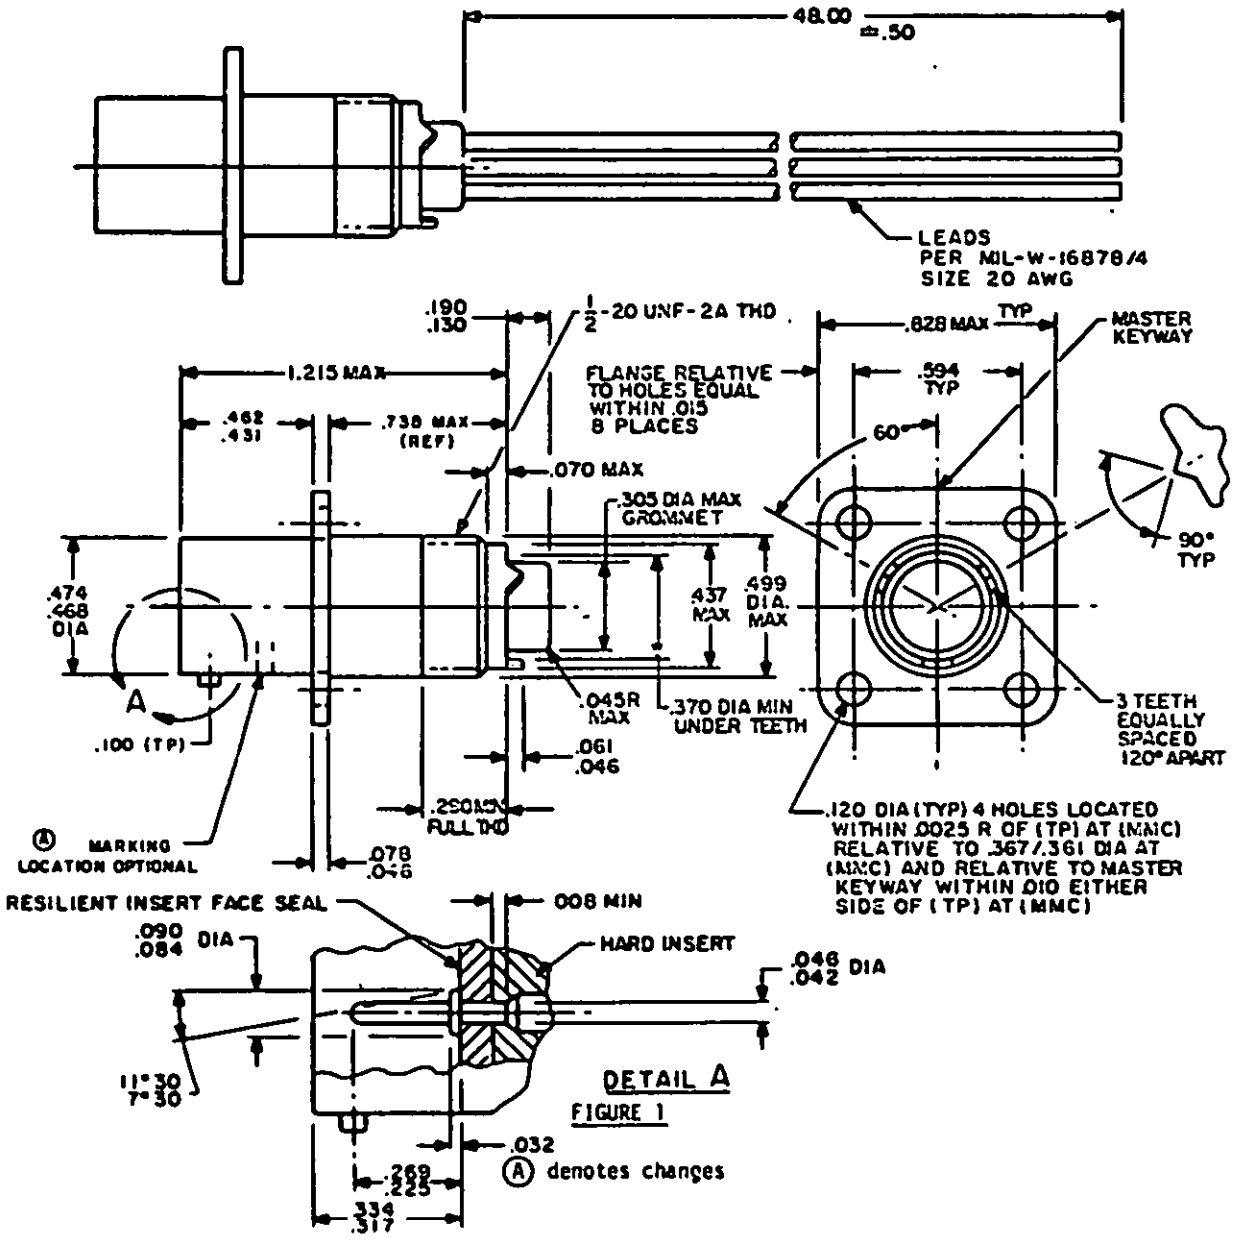


DETAIL A
FIGURE 1

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

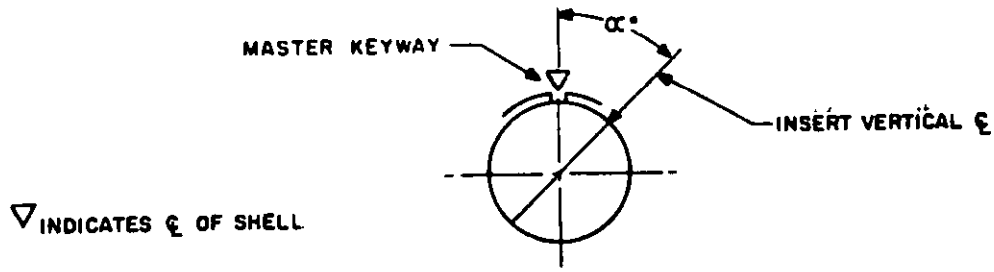

INSERT POSITION
(AS VIEWED FROM ENGAGING END)

FIGURE 2



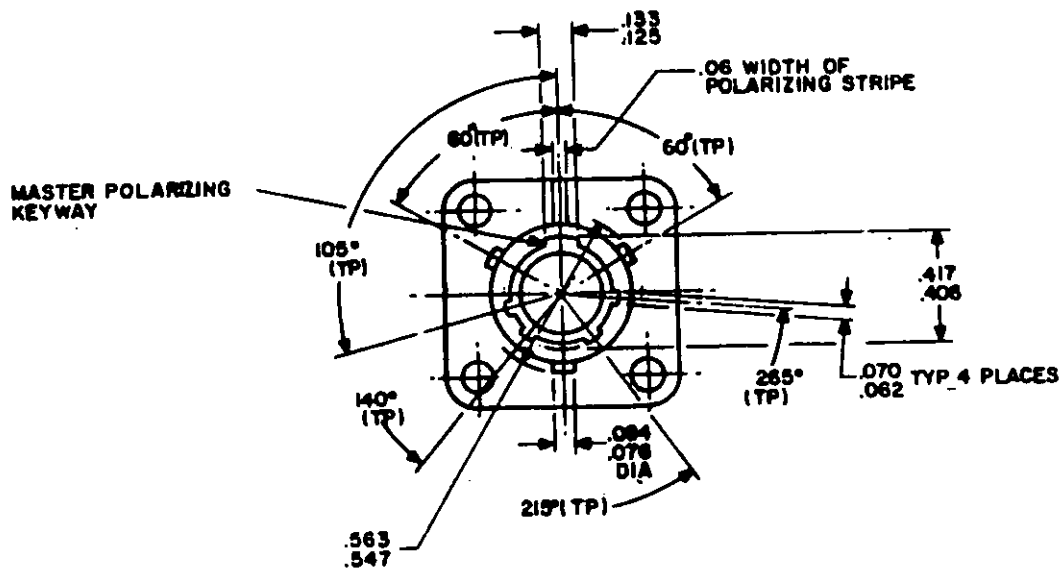


FIGURE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.




WITH STRAIGHT BACKSHELL
LESS STRAIN RELIEF

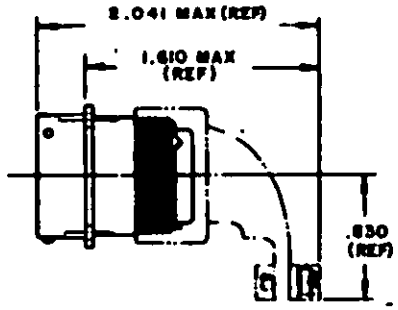


ASSEMBLED TO 90° BACKSHELL
WITH STRAIN RELIEF

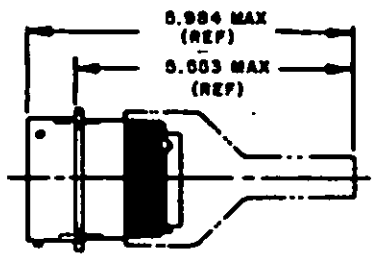


ASSEMBLED TO BACKSHELL
WITH STRAIGHT SHRINK STRAIN
RELIEF

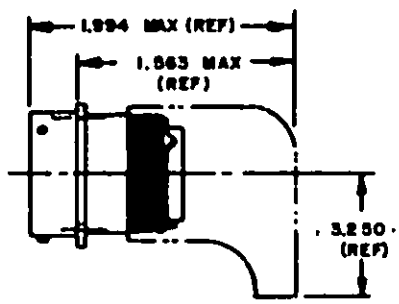

ASSEMBLED TO BACKSHELL WITH
90° SHRINK STRAIN RELIEF



ASSEMBLED TO STRAIGHT BACKSHELL
WITH STRAIN RELIEF

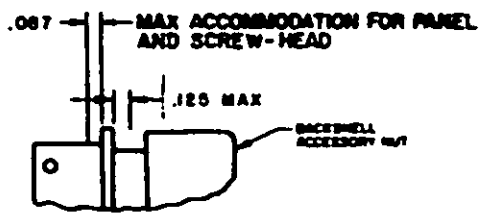

MAX PANEL THICKNESS (TYP)

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

NOTES:
1. For alternate polarizing positions, the connector insert is rotated in respect to the shell.
2. In "Normal Position" (Position "N") the insert vertical center line coincides with the center line of the master key of the shell.
3. In "Alternate Positions" (Positions "W", "X", "Y", and "Z") the pin insert is rotated ∝ degrees clockwise relative to centerline of the master key of the shell.
4. Fully mated coupling indication stripes and polarization stripes shall be color coded blue. Stripes shall have minimum width of .050 on coupling ring and minimum width of .040 on the shell.
5. Four keys (MMC) and insert shall be located within .0035 either side of (TP) relative to master key (MMC) and shell O. D. (MMC).
6. Dimensions in inches. Unless otherwise specified, tolerance shall be .XX ±.010 and .XXX ±.005, angular X° ±1° - 0' and X° X' ±30'.
Ⓐ 7. Contacts in this connector are nonremovable.

REQUIREMENTS:

Dimensions and configuration: See figures.

This connector mates with MIL-C-83723/37 and /49 (USAF).

Ⓐ For insert arrangements see MIL-STD-1669.

Rear hardware must be used per MIL-C-83723/15, /16(USAF).

Contacts and leads shall be furnished in assembled configuration.


Connector assembly must include a backshell to meet moisture sealing requirements.

Ⓐ Shell material: Classes A and R - Aluminum alloy per QQ-A-367.
Class G - Corrosion resistant steel per QQ-S-763.

Ⓐ Circumferential color bands specified in MIL-C-26482 do not apply.

Ⓐ Connector identification marking specified in MIL-C-26482 does not apply. Marking shall be as specified in the part number below.

Part number example:

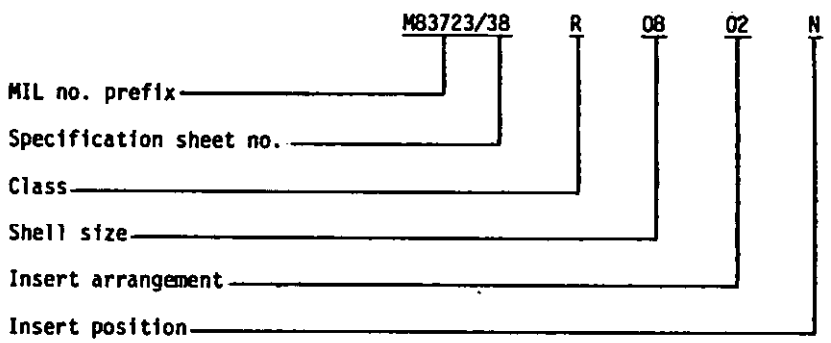

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 17, 70, 71, 80, 82, 84
DSA - ES

Preparing activity:
Air Force - 85

(Project 5935-F964-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

AFLC/MMGE Standardization
Wright-Patterson AFB OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.