MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (THREADED COUPLING, SELF-LOCKING, CRIMP PIN CONTACTS), (SERIES II, CLASS K)

This specification sheet is approved for use by the Engineering and Technical Support Division (AFLC), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-83723.

INACTIVE: USE MS3459 OF MIL-C-5015

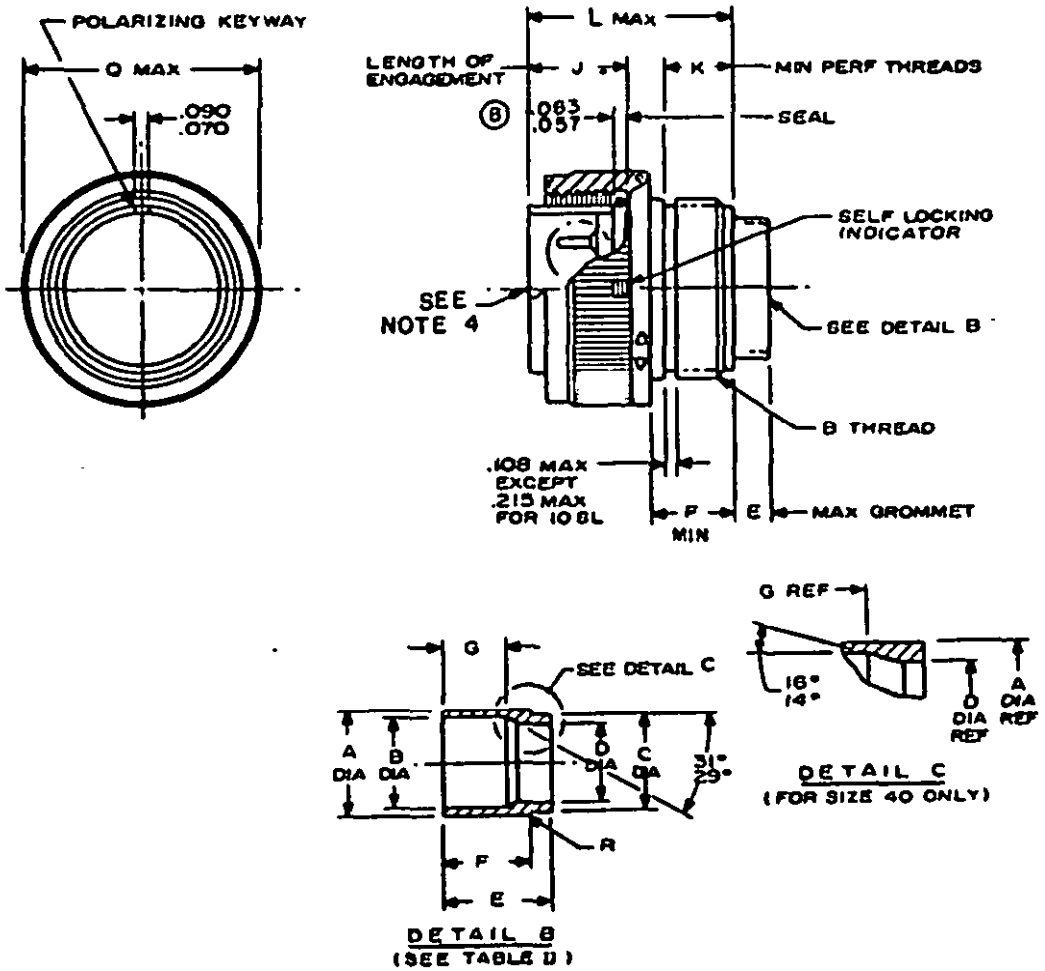


FIGURE 1. Connector, crimp pin contacts.

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

TABLE I. Connector dimensions.

SHELL SIZE PART NO. DESIGNATION	MIL-C-5015 SIZE SHELL	B THREAD	1/ E MAX	F MIN Ⓑ	J Ⓑ	L MAX Ⓑ	K	Q MAX Ⓑ
08	8S	.4375-28 UNEF-2A	.400	.418	.575 .565	1.360		.963
10	10S	.500-28	.400					1.088
11	10SL	.5625-24	.400					1.088
13	12S	.625-24	.400	.418	.575 .565	1.360	.375	1.213
12	12	.625-24	.317	.587	.762 .752	1.720		1.213
15	14S	.750-20	.400	.418	.575 .565	1.360		1.358
14	14	.750-20	.317	.587	.762 .752	1.720		1.358
17	16S	.875-20	.400	.418	.575 .565	1.360	.375	1.463
16	16	.875-20	.317	.587	.762 .752	1.720	.531	1.463
18	18	1.000-20	.380	.587				1.588
20	20	1.125-18	.380	.571				1.713
22	22	1.250-18	.380	.571		1.720		1.788
24	24	1.375-18	.315	.587		1.780		1.963
28	28	1.625-18 UNEF-2A	.315	.587		1.780		2.213
32	32	1.875-16 UN-2A	.260	.614		1.845		2.463
36	36	2.125-16 UN-2A	.260	.614		1.845	.531	2.713
40	40	2.375-16 UN-2A	.260	.619	.762 .752	1.845	.600	2.963

1/ When insulator arrangement sizes 18 thru 40 contain one or more size No. 0 contacts, E dimension will increase .150 max.

FIGURE 1. Connector dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

TABLE II. Detail B dimensions.

SHELL SIZE	A	B	C	D	E	F	G	R
8S	.280 .271	.250 .237	.243 .232	.180 .167	.427 .401	.342 .326	.286 .276	
10S	.340 .332	.312 .299	.298 .285	.242 .229	.420 .397	.335 .322	.272 .262	
10 SL	.409 .401	.380 .367	.378 .365	.310 .297	.430 .407	.335 .322	.237 .227	
12 & 12S	.460 .452	.432 .419	.403 .390	.355 .342	.419 .396	.340 .326	.270 .260	
14 & 14S	.563 .550	.518 .505	.485 .472	.448 .435	.414 .391	.339 .326	.261 .251	.040 .020
16 & 16S	.689 .676	.644 .631	.605 .592	.574 .561	.424 .401	.339 .326	.268 .256	.040 .020
18	.808 .793	.760 .747	.725 .712	.690 .677	.579 .551	.449 .436	.371 .361	.060 .040
20	.941 .928	.894 .881	.863 .850	.814 .801	.573 .560	.458 .445	.385 .375	
22	1.059 1.046	.982 .969	.973 .960	.902 .889	.551 .538	.456 .443	.389 .379	
24	1.170 1.157	1.106 1.093	1.085 1.072	1.026 1.013	.547 .534	.457 .444	.383 .373	
28	1.401 1.388	1.330 1.317	1.245 1.232	1.185 1.172	.573 .560	.458 .445	.329 .319	
32	1.652 1.639	1.608 1.595	1.515 1.502	1.440 1.427	.544 .531	.459 .446	.316 .306	
36	1.860 1.847	1.796 1.783	1.751 1.738	1.653 1.640	.573 .560	.463 .450	.355 .345	.060 .040
40	2.105 2.092	2.000 1.989		1.905 1.892	.823 .800		.379 .279	

INCHES	MM
.057	1.45
.063	1.60
.070	1.78
.090	2.29
.260	6.60
.315	8.00
.317	8.05
.375	9.52
.380	9.65
.400	10.16
.418	10.62
.4375	11.112
.500	12.70
.531	13.49
.565	14.35
.571	14.50
.575	14.60
.587	14.91
.600	15.24
.619	15.72
.625	15.88
.750	19.05
.752	19.10
.762	19.35
.875	22.22
.963	24.46
1.000	25.40
1.088	27.64
1.125	28.58
1.213	30.81
1.250	31.75
1.358	34.49
1.360	34.54
1.375	34.92
1.463	37.16
1.588	40.34
1.625	41.28
1.713	43.51
1.720	43.69
1.780	45.21
1.845	46.86
1.875	47.62
1.963	49.86
2.125	53.98
2.213	56.21
2.375	60.32
2.463	62.56
2.713	68.91
2.963	75.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. All dimensions are after plating.
4. For details of connector front end configuration see procurement specification.

FIGURE 1. Detail B dimensions and metric equivalents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.


This plug mates with MIL-C-83723/17, /19, and /21(USAF).

For insert arrangements see MIL-STD-1651.

Rear hardware per MIL-C-83723/27, /35, or /50(USAF) must be used for correct wire sealing.

Insert positions and alternate rotations: The letter N indicates normal (or standard) insert position. Alternate positions are identified in MIL-STD-1651.

Part number example:

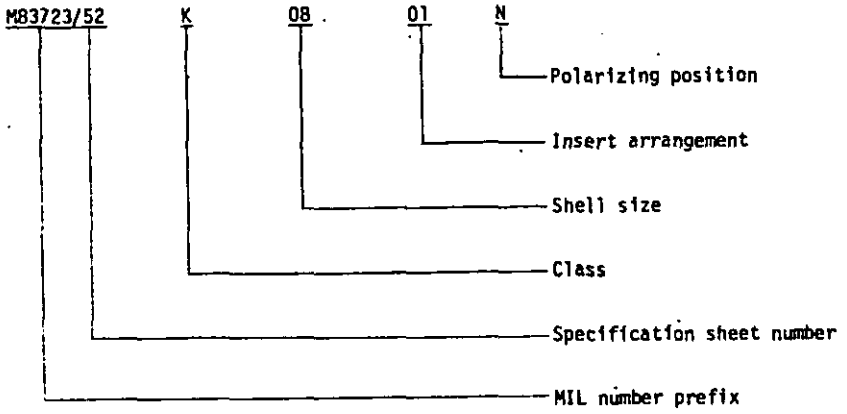

Custodian:
Air Force - 85

Review activities:
Air Force - 11, 15, 17, 99

Preparing activity:
Air Force - 85

(Project 5935-F078-2)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978 — 703-122/2167

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-83723/52B, Connectors, Electrical, (Circular, Environment Resisting), Plug, (Threaded Coupling, Self-Locking, Crimp Pin Contacts)...

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

AFLC/LOIE/STDZN
WPAFB, OH 45433

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFLC/LOIE/STDZN
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:20Z
Check the source to verify that this is the current version before use.