
INCH-POUND
MIL-C-83522/8B
30 December 1988
SUPERSEDING
MIL-C-83522/8A
28 September 1987

MILITARY SPECIFICATION SHEET

# CONNECTOR, RECEPTACLE, FIBER OPTIC, SINGLE TERMINUS, THREADED, BULKHEAD, HEX NUT MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83522.

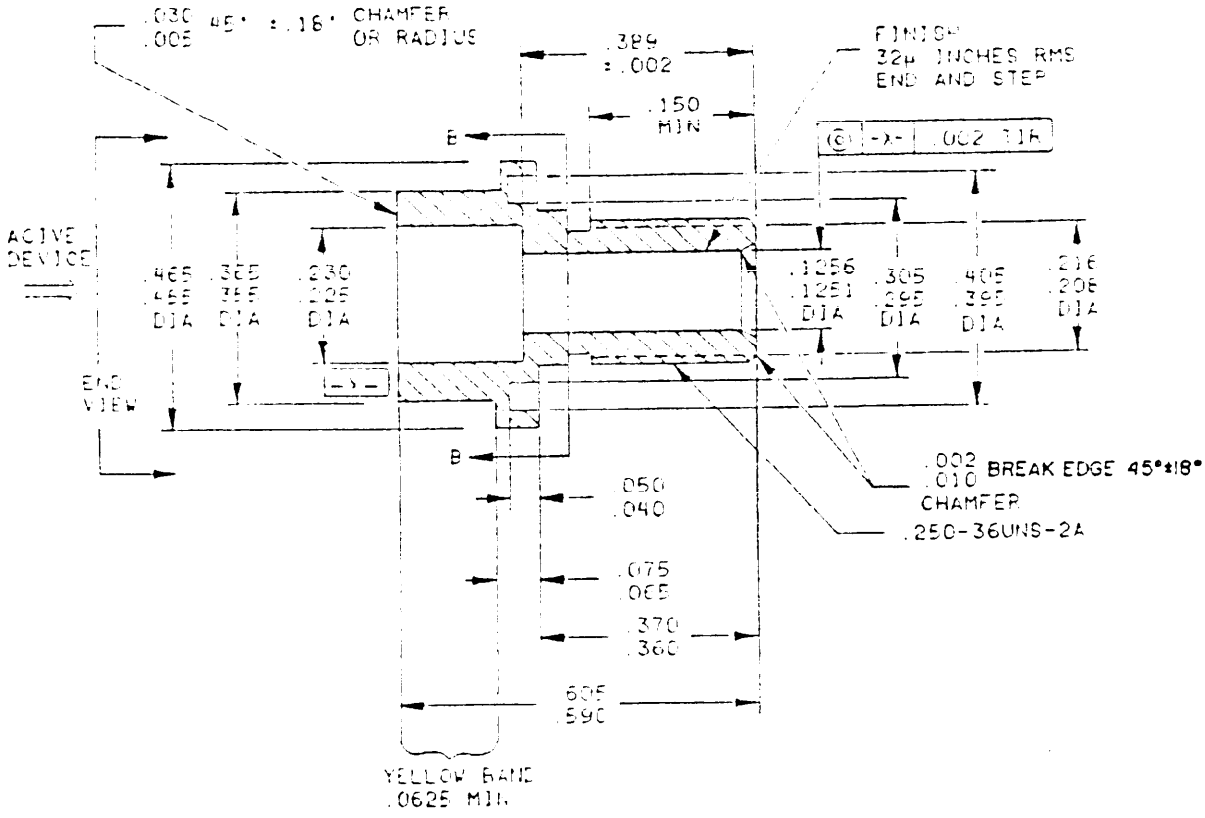



SECTION A-A


FIGURE 1. Dimensions and configuration.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

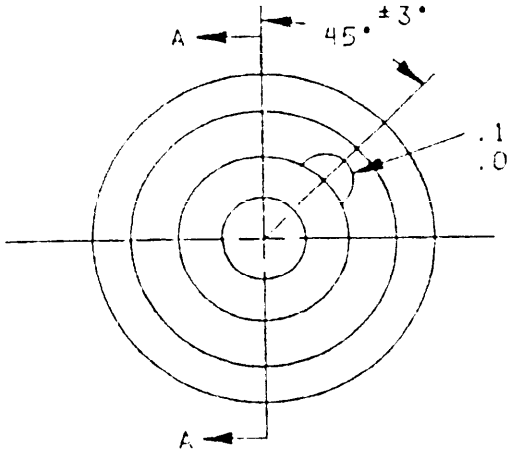


END VIEW

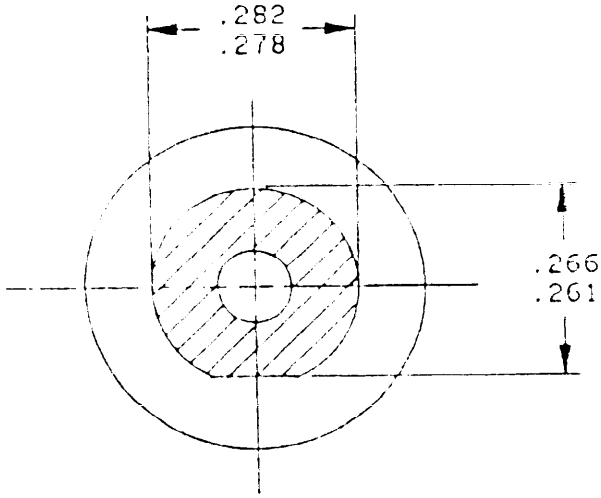


SECTION B-B

| Inches | mm | Inches | mm |
|---|---|---|---|
| .002 | 0.05 | .230 | 5.84 |
| .005 | 0.13 | .250 | 6.35 |
| .010 | 0.25 | .261 | 6.63 |
| .030 | 0.76 | .266 | 6.76 |
| .040 | 1.02 | .278 | 7.06 |
| .050 | 1.27 | .282 | 7.16 |
| .0625 | 1.588 | .295 | 7.49 |
| .065 | 1.65 | .305 | 7.75 |
| .075 | 1.91 | .355 | 9.02 |
| .090 | 2.29 | .360 | 9.14 |
| .100 | 2.54 | .365 | 9.27 |
| .1251 | 3.177 | .370 | 9.40 |
| .1256 | 3.190 | .389 | 9.88 |
| .150 | 3.81 | .395 | 10.03 |
| .160 | 4.06 | .405 | 10.29 |
| .170 | 4.31 | .455 | 11.56 |
| .208 | 5.28 | .465 | 11.81 |
| .216 | 5.48 | .590 | 14.99 |
| .225 | 5.72 | .605 | 15.37 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm) for three place decimals.
4. When applicable, three holes .016 (0.4) mm minimum diameter, equally spaced, are required for safety wiring after mating. Location on the coupling nuts optional.

FIGURE 1. Dimensions and configuration - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The receptacle housing and other metal components shall be of corrosion resistant steel per QQ-S-763, class 303 or nickel plated brass per QQ-B-626.

Weight: 5 grams maximum.

Safety wire holes: Not required.

Force to engage and disengage:

Longitudinal force: 12 pounds maximum.

Torque: 4 inch-pounds maximum.

Coupling proof torque: Not applicable.

Coupling mechanism retention force: Not applicable.

Ozone exposure: Not applicable.

Part or Identifying Number: M83522/8-01.

Receptacle accessories: Receptacle accessories shall include one internal tooth lockwasher (.410 inch maximum by .018 inch thick); one hexnut (.3125 inch by .065 inch thick maximum); one plastic device ring (.229 inch diameter maximum by .085 inch thick maximum); one fluoroelastomer (VITON rubber) o-ring (.301 inch diameter by .054 inch thick); and one dust cover.

NOTES: The receptacle mates with MIL-C-83522/1 plug, MIL-C-83522/2 plug, and MIL-C-83522/6 plug.

The receptacle accepts 10 cam sizes 18, 46, and 52.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - MI
Navy - AS, SH
Air Force - 11, 17, 19, 70, 71, 80, 84, 90, 99
DLA - ES

User activities:
Navy - MC, OS, YD
Air Force - 13, 14, 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0073-B)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.