METRIC


MIL-C-83527/4A
28 Decemer 1988
SUPERSEDING
DOD-C-83527/4
15 May 1985

MILITARY SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, RECTANGULAR, MULTIPLE INSERT TYPE, RACK TO PANEL, ENVIRONMENT RESISTING, 150°C CONTINUOUS OPERATING TEMPERATURE, SHELL SIZE 3

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-83527.

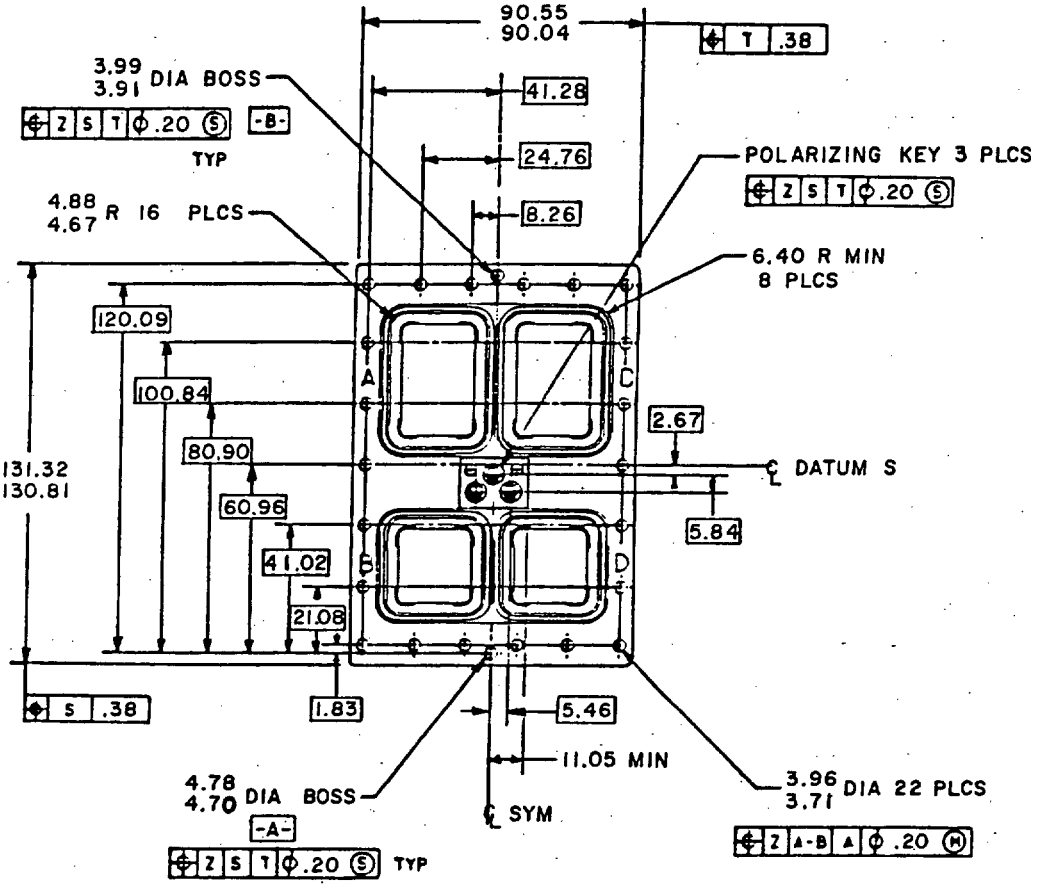

FRONT VIEW

FIGURE 1. Connector, receptacle.

A denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.


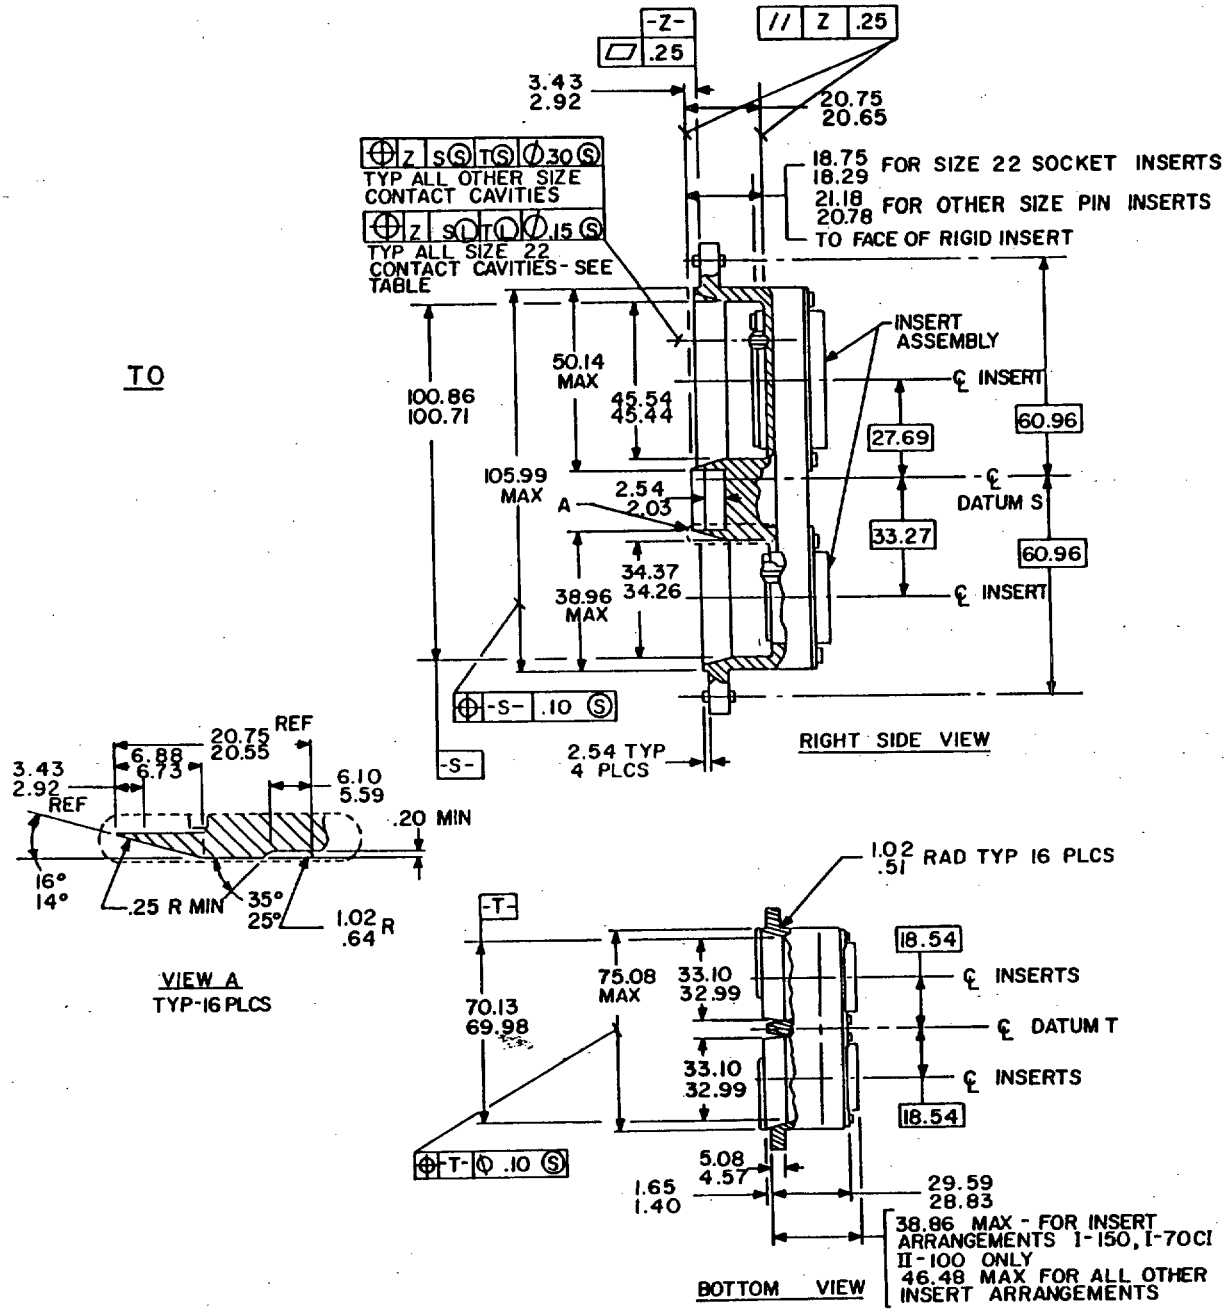


FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

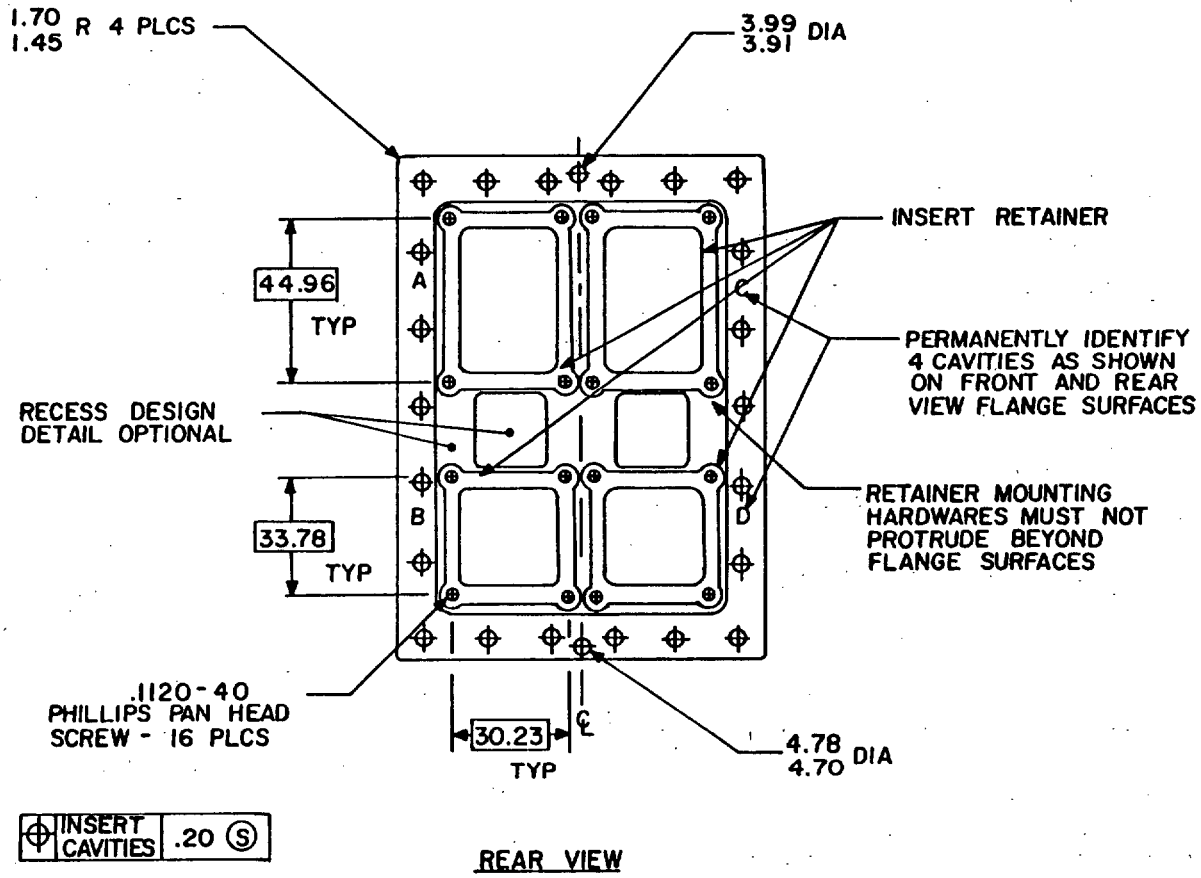

Size 22 contact cavity TP requirement

Datum T	Datum S						
	100.71(3.965)	100.74(3.966)	100.76(3.967)	100.79(3.968)	100.81(3.969)	100.84(3.970)	100.86(3.971)
69.98(2.755)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
70.00(2.756)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
70.02(2.757)	.30(.012)	.30(.012)	.30(.012)	.28(.011)	.25(.010)	.23(.009)	.20(.008)
70.05(2.758)	.28(.011)	.28(.011)	.28(.011)	.25(.010)	.23(.009)	.23(.009)	.20(.008)
70.08(2.759)	.25(.010)	.25(.010)	.25(.010)	.23(.009)	.23(.009)	.20(.008)	.18(.007)
70.10(2.760)	.23(.009)	.23(.009)	.23(.009)	.23(.009)	.20(.008)	.18(.007)	.18(.007)
70.13(2.761)	.20(.008)	.20(.008)	.20(.008)	.20(.008)	.18(.007)	.18(.007)	.15(.006)

FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.15	.006	3.91	.154	16.97	.55	46.48	1.830
0.20	.008	3.96	.156	17.58	.692	50.14	1.974
0.25	.010	3.99	.157	18.54	.730	60.96	2.4
0.30	.012	4.57	.180	21.08	.830	70.03	2.757
0.38	.015	4.67	.184	24.76	.975	70.13	2.761
0.79	.031	4.70	.185	27.69	1.090	75.08	2.956
1.40	.055	4.78	.188	32.99	1.299	80.90	3.185
1.45	.057	4.88	.192	33.10	1.303	90.04	3.545
1.65	.065	5.08	.2	33.27	1.310	90.55	3.565
1.70	.067	5.46	.215	34.32	1.351	100.71	3.965
1.83	.072	5.84	.230	34.41	1.355	100.84	3.970
2.03	.080	6.40	.252	38.96	1.534	100.86	3.971
2.11	.083	8.26	.325	41.02	1.615	105.99	4.173
2.54	.1	10.80	.425	41.28	1.625	120.09	4.728
2.67	.105	10.92	.430	45.49	1.791	130.81	5.15
3.71	.146	11.05	.435	45.54	1.793	131.32	5.170

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are in parentheses.
3. Inch equivalents are given for general information only.

FIGURE 1. Connector, receptacle - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Dimensions and configuration: Shall be in accordance with figure 1.

Contacts: See MIL-C-39029/93, /94, /96, /97, and /99.

Ⓐ Inserts: See MIL-STD-1842 and MIL-C-83527/8.

Mating connector: See MIL-C-83527/3.

Ⓐ Military part or identifying number (PIN):

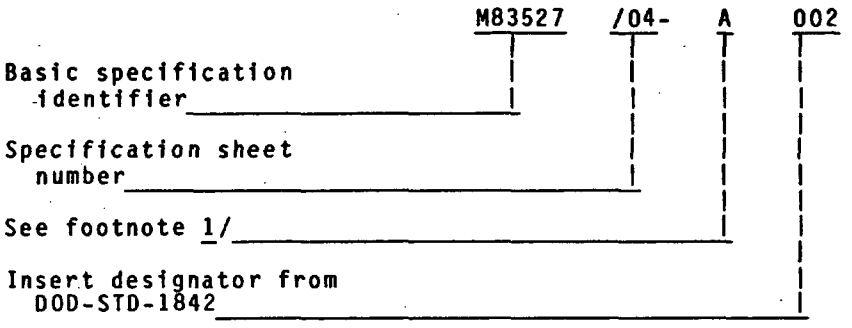

Ⓐ 1/ "A" designator for insert with contacts, "B" designator for insert without contacts.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3623-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.