INCH-POUND
MIL-C-83723/72B
30 June 1992
SUPERSEDING
MIL-C-83723/72A
13 November 1975

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE,(FLANGE MOUNT, BAYNOET COUPLING, CRIMP PIN CONTACT) SERIES III, CLASS A, G, R, AND W)

This specification is approved for use by the all Departments and Agencies of the Department of Defense.

(B) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specific in the solicitation: MIL-C-83723.

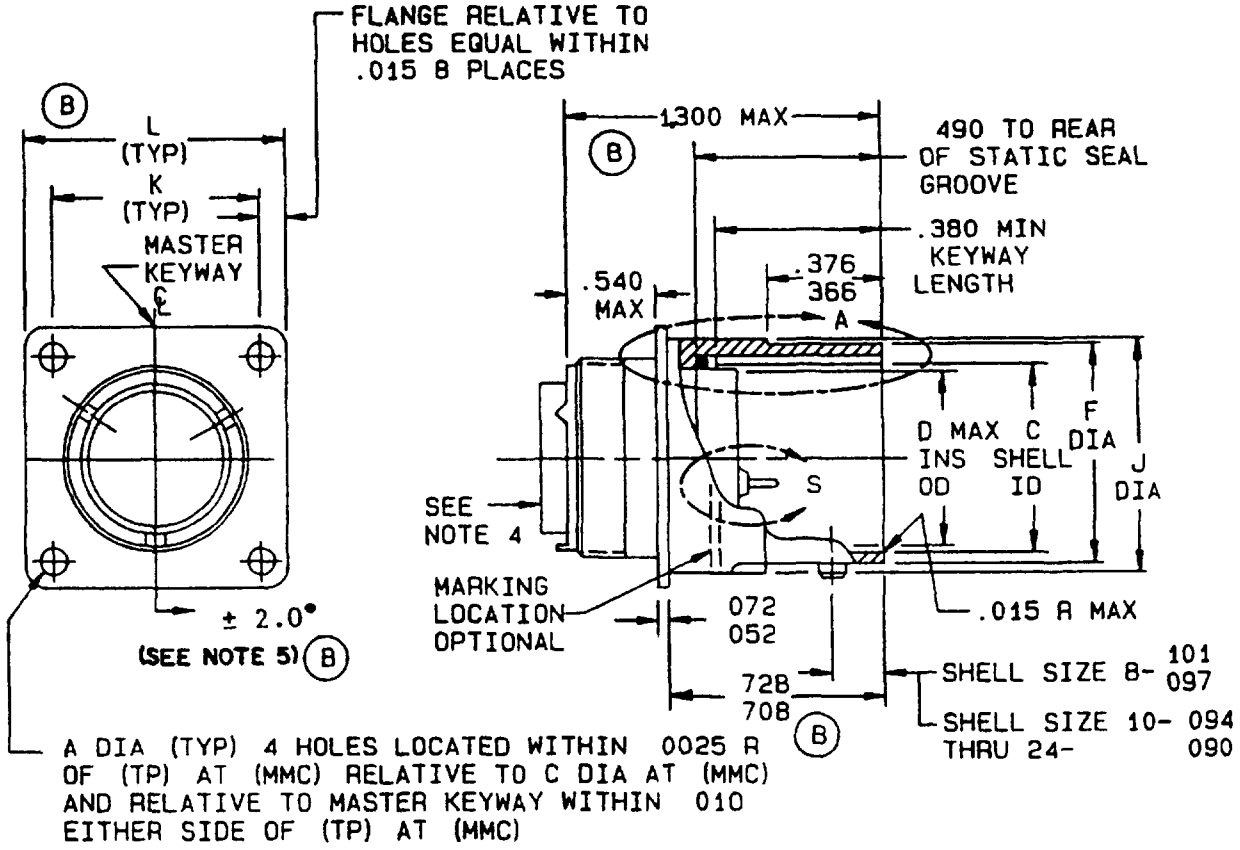


FIGURE 1. Configurations and dimensions.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

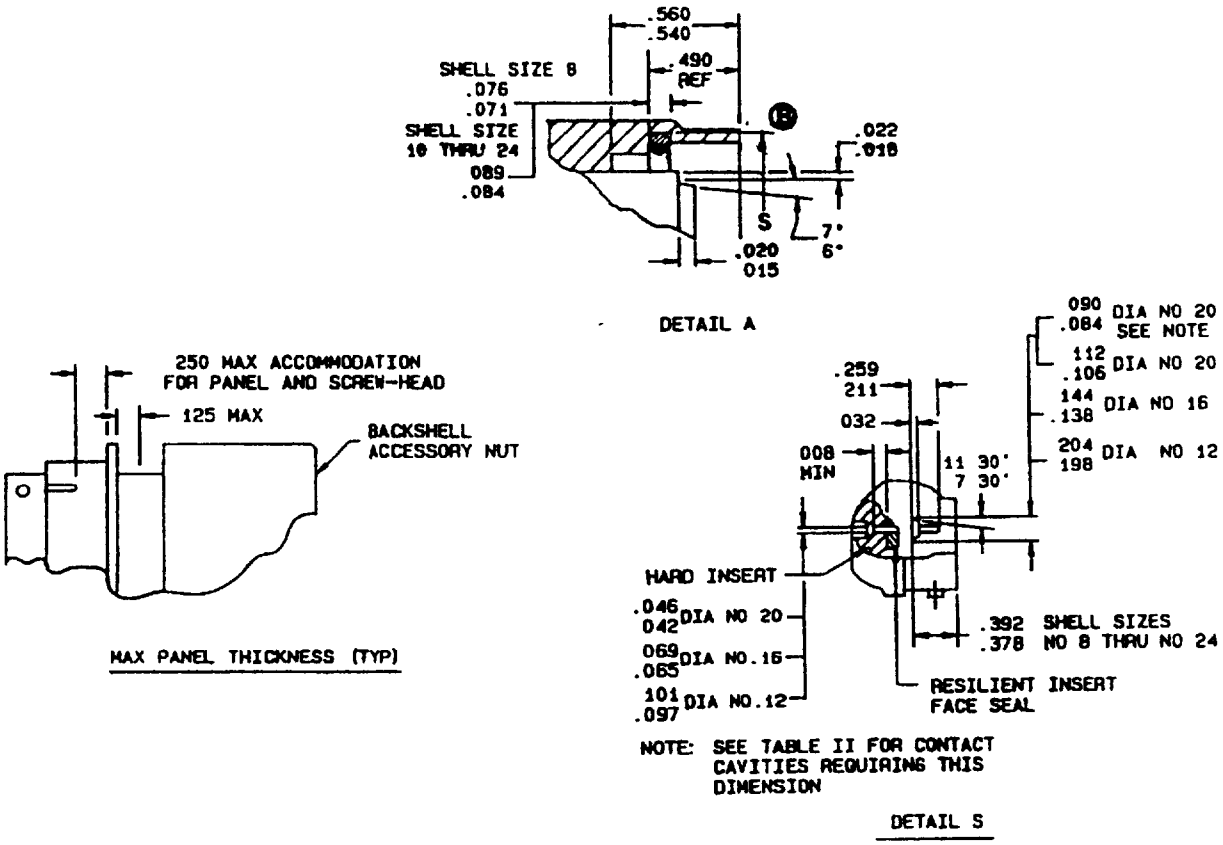


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Connector dimensions.

(B)

Shell size	A	C	D	F	J	K	L	S +.005 -.000
8	.120	.428 .433	.312	.536 .531	.561	.594	.812	.508
10	.120	.530 .535	.388	.659 .654	.696	.719	.937	.636
12	.120	.700 .705	.558	.829 .824	.875	.812	1.031	.806
14	.120	.769 .774	.627	.898 .893	.935	.906	1.125	.875
16	.120	.869 .901	.772	1.025 1.020	1.062	.969	1.250	1.002
18	.120	1.002 1.007	.860	1.131 1.126	1.187	1.062	1.343	1.108
20	.120	1.127 1.132	.985	1.256 1.251	1.312	1.156	1.437	1.233
22	.120	1.252 1.257	1.110	1.381 1.376	1.437	1.250	1.562	1.358
24	.149	1.377 1.382	1.235	1.506 1.501	1.562	1.375	1.703	1.483

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0025	0.06	.120	3.05	.536	13.61	.875	22.23	1.233	31.32
.005	0.13	.125	3.18	.540	13.72	.893	22.68	1.235	31.37
.008	0.20	.138	3.51	.558	14.17	.896	22.76	1.250	31.75
.015	0.38	.144	3.66	.560	14.22	.898	22.81	1.251	31.78
.018	0.46	.149	3.78	.561	14.25	.901	22.89	1.252	31.80
.020	0.51	.198	5.03	.594	15.09	.906	23.01	1.256	31.90
.022	0.56	.204	5.18	.627	15.93	.935	23.75	1.257	31.93
.032	0.81	.211	5.36	.636	16.15	.937	23.80	1.312	33.32
.042	1.07	.250	6.35	.654	16.61	.969	24.61	1.343	34.11
.046	1.17	.259	6.58	.659	16.74	.985	25.02	1.375	34.93
.052	1.32	.312	7.92	.696	17.68	1.002	25.45	1.376	34.95
.065	1.65	.366	9.30	.700	17.78	1.007	25.58	1.377	34.98
.069	1.75	.376	9.55	.705	17.91	1.020	25.91	1.381	35.08
.071	1.80	.378	9.60	.708	17.98	1.025	26.04	1.382	35.10
.072	1.83	.380	9.65	.719	18.26	1.062	26.97	1.385	35.18
.076	1.93	.388	9.86	.728	18.49	1.070	27.18	1.437	36.50
.084	2.13	.392	9.96	.769	19.53	1.108	28.14	1.483	37.66
.089	2.26	.428	10.87	.772	19.61	1.125	28.58	1.501	38.13
.090	2.29	.433	11.00	.774	19.66	1.126	28.60	1.506	38.25
.094	2.39	.490	12.45	.806	20.47	1.127	28.63	1.562	39.67
.097	2.46	.508	12.90	.812	20.62	1.131	28.73	1.703	43.26
.101	2.57	.530	13.46	.824	20.93	1.132	28.75		
.106	2.69	.531	13.49	.829	21.06	1.156	29.36		
.112	2.84	.535	13.59	.860	21.84	1.187	30.15		

(B) NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only based upon 1 inch = 25.4mm.
3. Unless otherwise specified, tolerances are .005 (0.13 mm) for three place decimals and .01 (0.25 mm) for two place decimals and ±1 for all angles.
4. Rear accessory interchangeability dimensions shall be in accordance with MIL-C-83723 and MIL-C-85049.
5. The centerline of indicated projection must be located on vertical centerline within 2°.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(B) Dimensions and configuration: See figure 1.

(B) For insert arrangements, see MIL-STD-1554 and table I.


TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	(B) 03	1, 2, and 3
10	(B) 06	1, 2, 3, 4, 5, 6

(B) For connector accessories See MIL-C-85049.

This connector mates with MIL-C-83723/75 and /77.

(B) Part or Identifying Number (PIN) example:

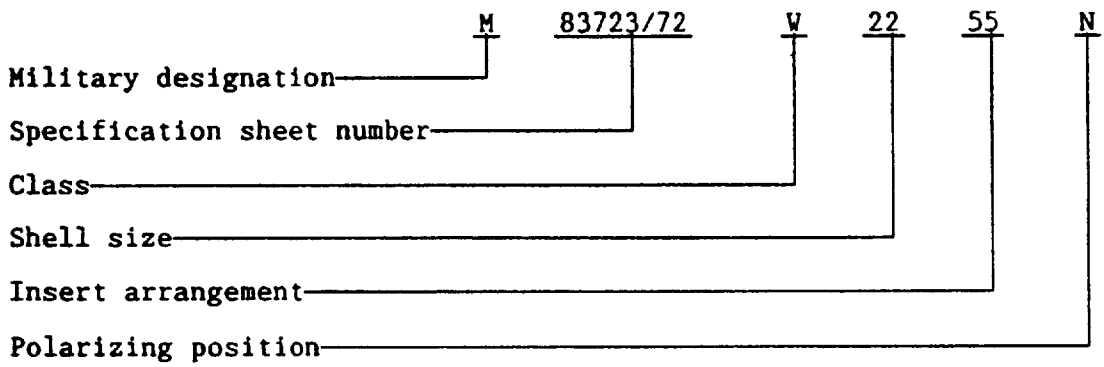

CONCLUDING MATERIAL

(B) Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing activity
Air Force - 85

Agent:
DLA - ES

(B) Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 15, 17, 80
DLA - ES

(Project 5935-3728-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.