INCH-POUND

MIL-DTL-83723/73F
w/AMENDMENT 1
22 September 2020
SUPERSEDING
MIL-DTL-83723/73F
19 August 2009

DETAIL SPECIFICATION SHEET

CONNECTOR, ELECTRIC, (CIRCULAR, ENVIRONMENT RESISTING), RECEPTACLE, (SINGLE HOLE MOUNT, BAYONET COUPLING, CRIMP SOCKET CONTACT) (SERIES III, CLASSES A, G, M, R, T, W AND Z)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83723.

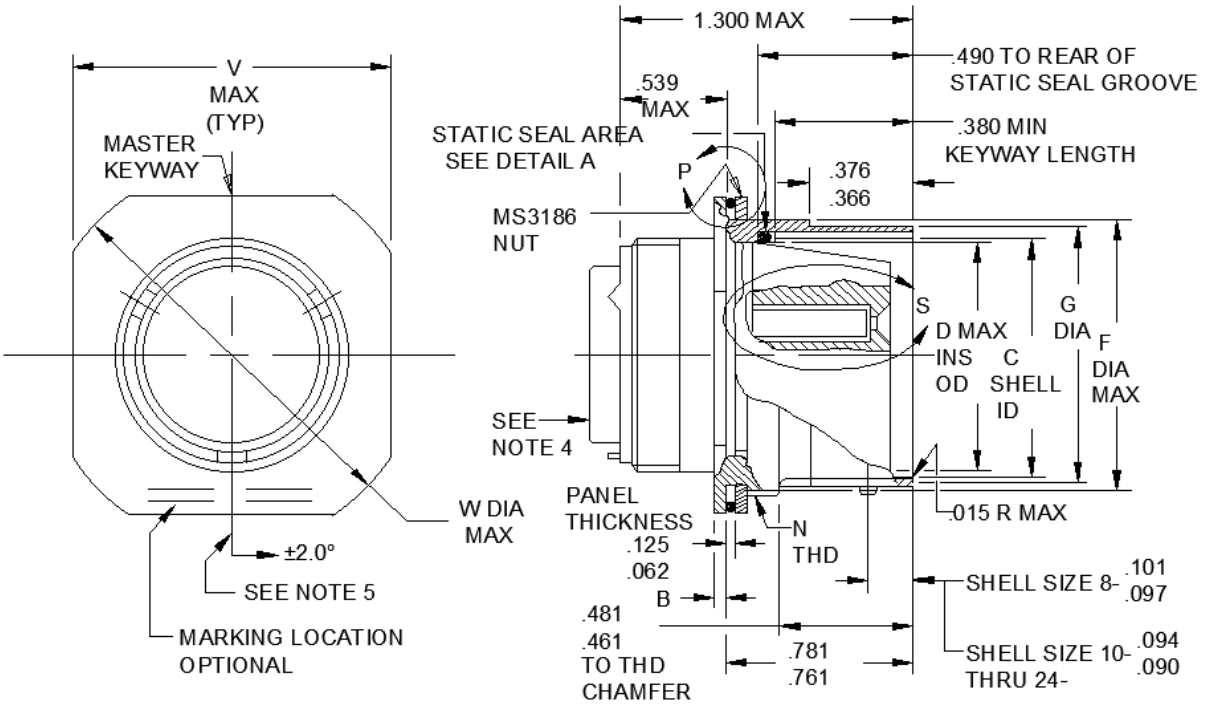


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

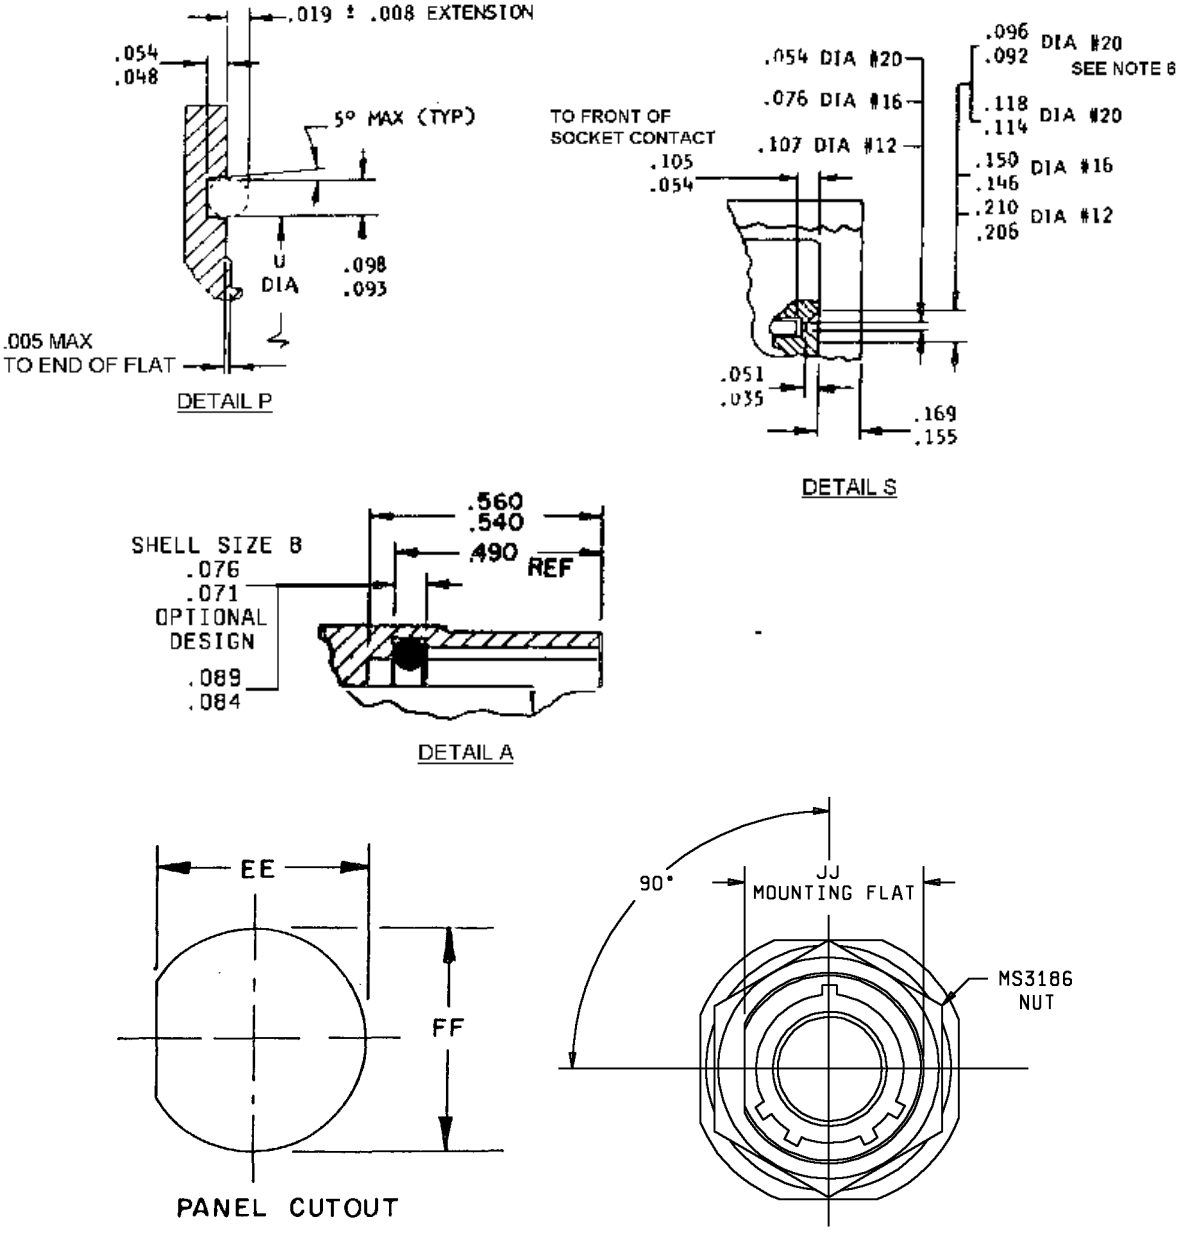


FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Shell size	B	C	D max	F max	G	N thread
8	.137 (3.48) .097 (2.46)	.428 (10.87) .433 (11.00)	.312 (7.92)	.561 (14.25)	.536 (13.61) .531 (13.49)	.625 20UN-2A
10		.530 (13.46) .535 (13.59)	.388 (9.86)	.696 (17.68)	.659 (16.74) .654 (16.61)	.750 20UNEF-2A
12		.700 (17.78) .705 (17.91)	.558 (14.17)	.875 (22.23)	.829 (21.06) .824 (20.93)	.9375 20UNEF-2A
14		.769 (19.53) .774 (19.66)	.627 (15.93)	.935 (23.75)	.898 (22.81) .893 (22.68)	1.000 20UNEF-2A
16		.896 (22.76) .901 (22.89)	.772 (19.61)	1.062 (26.97)	1.025 (26.04) 1.020 (25.91)	1.125 20UNEF-2A
18		1.002 (25.45) 1.007 (25.58)	.860 (21.84)	1.187 (30.15)	1.131 (28.73) 1.126 (28.60)	1.250 20UNEF-2A
20		1.127 (28.63) 1.132 (28.75)	.985 (25.02)	1.312 (33.32)	1.256 (31.90) 1.251 (31.78)	1.375 20UNEF-2A
22	.168 (4.27) .128 (3.25)	1.252 (31.80) 1.257 (31.93)	1.110 (28.19)	1.437 (36.50)	1.381 (35.08) 1.376 (34.95)	1.500 20UNEF-2A
24		1.377 (34.98) 1.382 (35.10)	1.235 (31.37)	1.562 (39.67)	1.506 (38.25) 1.501 (38.13)	1.625 20UNEF-2A

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Shell size	U	V	S +.005 -.000	W max	EE	FF	JJ
8	.670 (17.02)	.979 (24.87)	.508 (12.90)	1.068 (27.13)	.605 (15.37)	.635 (16.13)	.596 (15.14) .590 (14.99)
10	.796 (20.22)	1.104 (28.04)	.636 (16.15)	1.192 (30.28)	.730 (18.54)	.760 (19.30)	.721 (18.31) .715 (18.16)
12	.984 (24.99)	1.291 (32.79)	.806 (20.47)	1.380 (35.05)	.917 (23.29)	.947 (24.05)	.908 (23.06) .902 (22.91)
14	1.046 (26.57)	1.391 (35.33)	.875 (22.23)	1.505 (38.23)	.980 (24.89)	1.010 (25.65)	.971 (24.66) .965 (24.51)
16	1.171 (29.74)	1.516 (38.51)	1.002 (25.45)	1.630 (41.40)	1.105 (28.07)	1.135 (28.83)	1.096 (27.84) 1.090 (27.69)
18	1.296 (32.92)	1.641 (41.68)	1.108 (28.14)	1.756 (44.60)	1.229 (31.22)	1.260 (32.00)	1.220 (30.99) 1.214 (30.84)
20	1.484 (37.69)	1.766 (44.86)	1.233 (31.32)	1.860 (47.24)	1.354 (34.39)	1.385 (35.18)	1.345 (34.16) 1.339 (34.01)
22	1.609 (40.87)	1.954 (49.63)	1.358 (34.49)	2.086 (52.98)	1.479 (37.57)	1.510 (38.35)	1.470 (37.34) 1.464 (37.19)
24	1.734 (44.04)	2.079 (52.81)	1.483 (37.67)	2.160 (54.86)	1.604 (40.74)	1.635 (41.53)	1.595 (40.51) 1.589 (40.36)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.0025	0.06	.120	3.05	.536	13.61	.875	22.23	1.233	31.32
.005	0.13	.125	3.18	.540	13.72	.893	22.68	1.235	31.37
.008	0.20	.138	3.51	.558	14.17	.896	22.76	1.250	31.75
.015	0.38	.144	3.66	.560	14.22	.898	22.81	1.251	31.78
.018	0.46	.149	3.78	.561	14.25	.901	22.89	1.252	31.80
.020	0.51	.198	5.03	.594	15.09	.906	23.01	1.256	31.90
.022	0.56	.204	5.18	.627	15.93	.935	23.75	1.257	31.93
.032	0.81	.211	5.36	.636	16.15	.937	23.80	1.312	33.32
.042	1.07	.250	6.35	.654	16.61	.969	24.61	1.343	34.11
.046	1.17	.259	6.58	.659	16.74	.985	25.02	1.375	34.93
.052	1.32	.312	7.92	.696	17.68	1.002	25.45	1.376	34.95
.065	1.65	.366	9.30	.700	17.78	1.007	25.58	1.377	34.98
.069	1.75	.376	9.55	.705	17.91	1.020	25.91	1.381	35.08
.071	1.80	.378	9.60	.708	17.98	1.025	26.04	1.382	35.10
.072	1.83	.380	9.65	.719	18.26	1.062	26.97	1.385	35.18
.076	1.93	.388	9.86	.728	19.49	1.070	27.18	1.437	36.50
.084	2.13	.392	9.96	.769	19.53	1.108	28.14	1.483	37.66
.089	2.26	.428	10.87	.772	19.61	1.125	28.58	1.501	38.13
.090	2.29	.433	11.00	.774	19.66	1.126	28.60	1.506	38.25
.094	2.39	.490	12.45	.806	20.47	1.127	28.63	1.562	39.67
.097	2.46	.508	12.90	.812	20.62	1.131	28.73	1.703	43.26
.101	2.57	.530	13.46	.824	20.93	1.132	28.75		
.106	2.69	.531	13.49	.829	21.06	1.156	29.36		
.112	2.84	.535	13.59	.860	21.84	1.187	30.15		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals, ± .01 (0.25 mm) for two place decimals and ± 1° for all angles.
4. Rear accessory interchangeability dimensions shall be accordance with SAE-AS85049.
5. The centerline of indicated projection must be located on vertical centerline ± 2°.
6. See table I for contact cavities requiring this dimension.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

For insert arrangements, see MIL-STD-1554 and table I.


TABLE I. Inserts requiring reduced diameters for lead-in chamfers on contact cavities.

Shell	Insert arrangements	Contact cavities
8	03	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

For connector accessories: See SAE-AS85049.

This connector mates with MIL-DTL-83723/76 and /78.

Part or Identifying Number (PIN) example:

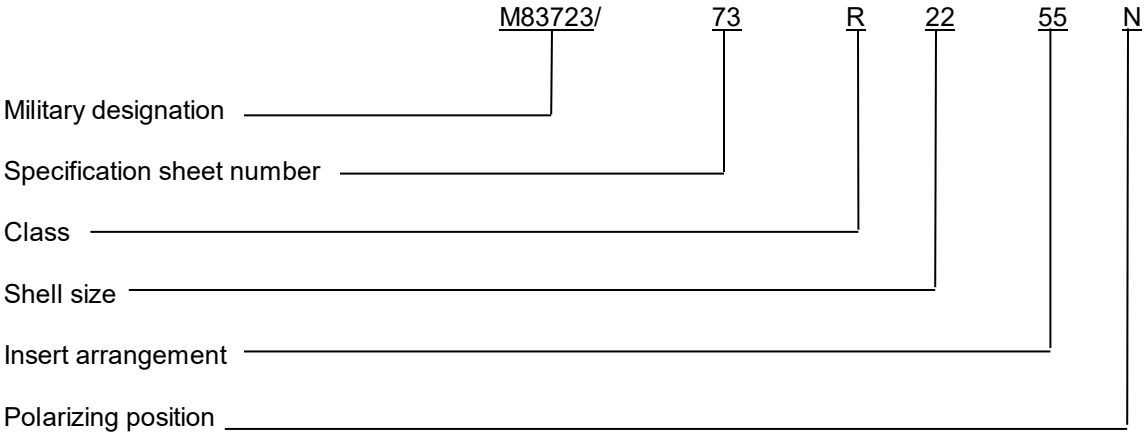

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.
Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MS3186
MIL-DTL-83723/76
MIL-DTL-83723/78
MIL-STD-1554
SAE-AS85049

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2020-107)

Review activities:
Army - AR, AV, MI
Navy - EC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:21Z
Check the source to verify that this is the current version before use.