
MILITARY SPECIFICATION SHEET

SOCKETS, PLUG-IN ELECTRONIC COMPONENTS, (FOR 36 PIN DUAL-IN-LINE PACKAGES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the sockets described herein shall consist of this specification and the latest issue of MIL-S-83734.

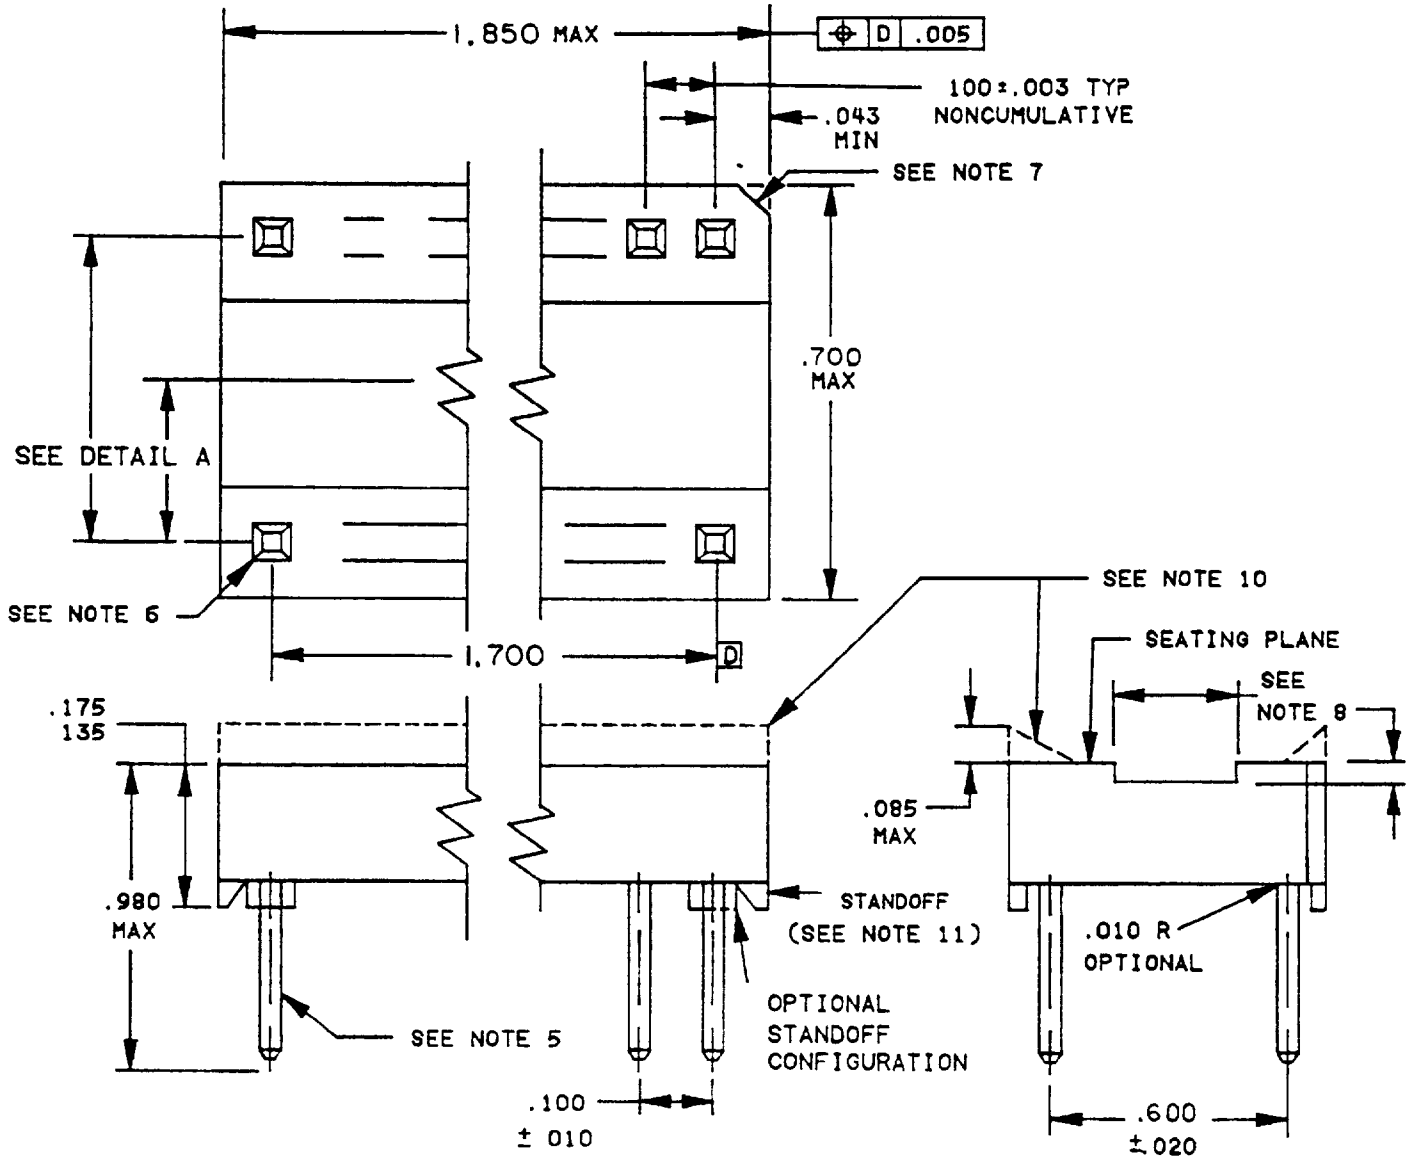


CONFIGURATION 1 (SOLID BODY WITHOUT MOUNTING HOLES)

FIGURE 1 Socket, dual-in-line


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

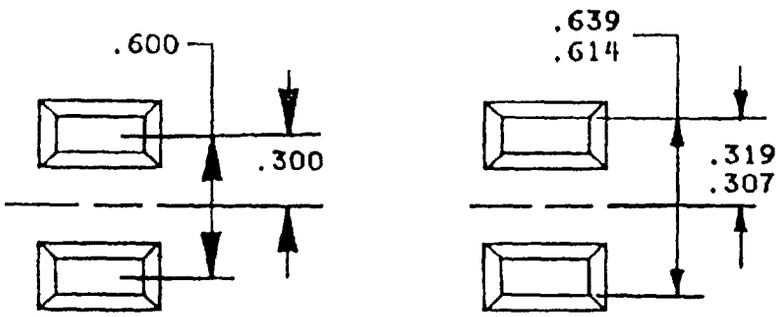

DETAIL A

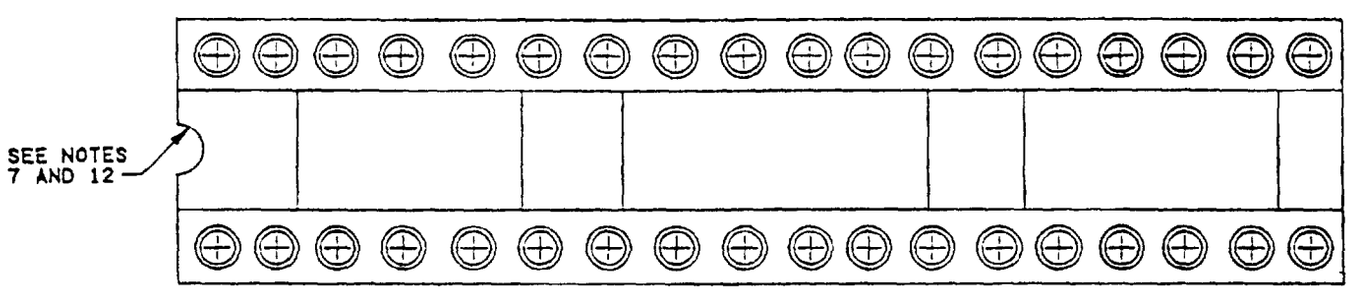

CONFIGURATION 2 (OPEN FRAME)

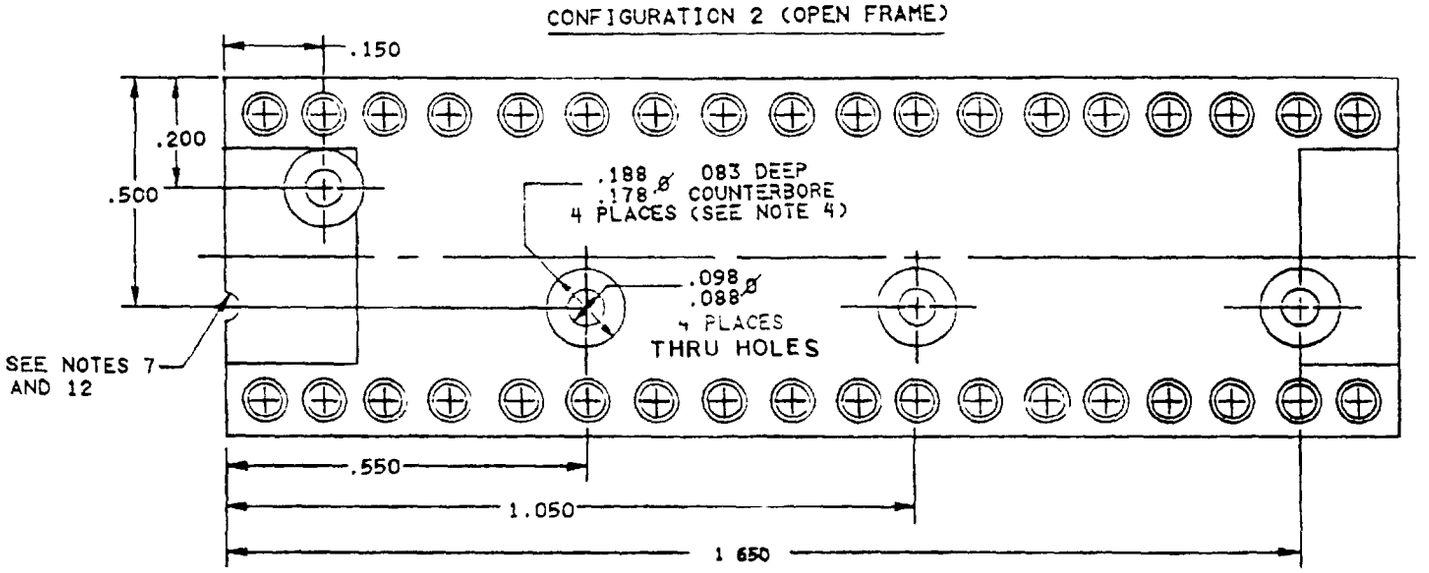

CONFIGURATION 3 (SOLID BODY WITH MOUNTING HOLES)

FIGURE 1 Socket dual-in-line - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.003	0.08	.200	5 08
.005	0.13	300	7.62
.010	0.25	.307	7.80
.020	0.51	.319	8.10
.043	1.09	.500	12.70
.083	2.11	.550	13.97
.085	2.16	.600	15.24
.088	2.24	.614	15.59
.098	2.49	.639	16.23
.100	2.54	.700	17.78
.135	3.43	.980	24.89
.150	3.81	1.050	26.67
.175	4.45	1.650	41.91
.178	4.52	1.700	43.18
.189	4.78	1.850	46.99

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm) for three place decimals
4. A recess to be provided to fully enclose the head or nut of the fastener below the surface of the socket
5. Contact terminations may be round, square, or rectangular
6. Devices shall accept flat leads .008 (0 20 mm) to 015 (0 38 mm) thick by 015 (0 38 mm) to 021 (0.53 mm) wide The values for mating forces are based upon the use of standard leads 011 ± 002 (0 28 ±0 05 mm) thick by 018 ± 002 (0 46 ±0.05 mm) wide. The length of the lead accepted by the device shall be .150 (3 81 mm). Contact shall be made at or before reaching a depth of 100 (2 54 mm).
7. A visual polarization index shall be provided in the first quadrant If the visual index overlaps into the fourth quadrant, it shall be adjacent to or clockwise from contact number one.
8. It is desirable that the socket face shall be relieved to facilitate removal of the integrated circuit
9. Metric equivalents are in parentheses
10. Ramped edges optional. Configuration of edges optional
11. Standoffs optional for type I
12. All dimensions of configuration 1 are applicable to configurations 2 and 3
13. For type II terminations, there shall be a minimum of 2 standoffs The configuration and location of the standoffs is optional.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1 and table I.

Material and contact finish. In accordance with MIL-S-83734.

Terminations: Solderless wrap, type I and printed circuit terminal, type II (see table I and MIL-S-83734).

Contact identification See figure 1 and note 7.

Part number 83733/2- (dash number from table I).

Encapsulation information See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. 1/

Dash number M83734/9	Type	Contact style	Insulator configuration	Contact engagement area finish	Termination finish
-010	I	A	3	Gold	Gold
-011	I	A	3	Gold	Tin/lead
-012	I	A	3	Tin/lead	Tin/lead
-013	II	B	2	Gold	Gold
-014	II	B	2	Gold	Tin/lead
-015	II	B	2	Tin/lead	Tin/lead
-019	II	B	1	Gold	Gold
-020	II	B	1	Gold	Tin/lead
-021	II	B	1	Tin/lead	Tin/lead
-022	II	B	3	Gold	Gold
-023	II	B	3	Gold	Tin/lead
-024	II	B	3	Tin/lead	Tin/lead
-025	II	A	1	Gold	Gold
-026	II	A	1	Gold	Tin/lead
-027	II	A	1	Tin/lead	Tin/lead
-028	II	A	2	Gold	Gold
-029	II	A	2	Gold	Tin/lead
-030	II	A	2	Tin/lead	Tin/lead
-031	II	A	3	Gold	Gold
-032	II	A	3	Gold	Tin/lead
-033	II	A	3	Tin/lead	Tin/lead

1/ For replacement purposes, the Government will stock, store, and issue -010, 013, and -031 parts only. (See 6.5 of MIL-S-83734)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information.

Superseded part number M83734/9- 1/ 2/	New part number M83734/9-
001	010
002	011
003	012
004	013
005	014
006	015
007, 016	No superseding part number
008, 017	"
009, 018	"

1/ Dash numbers 001 through 009 are high profile sockets.
2/ Dash numbers 007 through 009 and 016 through 018 are solder cup terminations.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 95

Review activities
Navy - AS, OS, SH, TD
Air Force - 11, 99
DLA - ES

User activities
Navy - MC
Air Force - 19

Preparing activity.
Air Force - 85

Agent:
DLA - ES

(Project 5935-3475-9)

☆U.S. GOVERNMENT PRINTING OFFICE 1996 — 906 036/46036

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.