The documentation and process conversion measures necessary to comply with this document shall be completed by 15 June 2023.

INCH-POUND

MIL-PRF-19500/488F
w/AMENDMENT 1
15 March 2023
SUPERSEDING
MIL-PRF-19500/488F
16 February 2018

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, NPN, SILICON, HIGH-POWER,
TYPES 2N5671 AND 2N5672, CASE MOUNT THROUGH HOLE,
QUALITY LEVELS JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN, silicon, high-power transistors. Four levels of product assurance (JAN, JANTX, JANTXV, and JANS) are provided for each device type as specified in MIL-PRF-19500.

1.2 Package outline. The device package outline is a TO–204AA (similar to TO-3) in accordance with figure 1 for all encapsulated device types.

1.3 Maximum ratings. Unless otherwise specified, T_C = +25°C.

Types	P_T (1) T_A = +25°C	P_T (2) T_C = +25°C	$R_{\theta JC}$	V_{CBO}	V_{CEO}	V_{EBO}	I_C	I_B	T_{STG} and T_J
	W		°C/W	V dc	V dc	V dc	A dc	A dc	°C
2N5671	6.0	140	1.25	120	90	7.0	30	10	-65 to +200
2N5672	6.0	140	1.25	150	120	7.0	30	10	

(1) Derate linearly 34.2 mW/°C for T_A > +25°C.
(2) Derate linearly 800 mW/°C for T_C > +25°C.

1.4 Primary electrical characteristics. Unless otherwise specified, T_A = +25°C.

Limits	h_{FE1} V_{CE} = 2.0 V dc I_C = 15 A dc	$V_{CE(sat)1}$ I_C = 15 A dc I_B = 1.2 A dc	C_{obo} 100 kHz < f < 1 MHz V_{CB} = 10 V dc I_E = 0	$\|h_{fe}\|$ f = 5 MHz I_C = 2 A dc V_{CE} = 10 V dc	Pulse response	
					t_{on}	t_{off}
		V dc	pF		µs	µs
Min	20			10		
Max	100	0.75	900	40	0.5	1.5

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example, 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality levels. The quality level designators for encapsulated devices that are applicable for this specification sheet are "JAN", "JANTX", "JANTXV", and "JANS".

1.5.2 Device type. The designation system for the device types of transistors covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The transistors of this specification sheet use the first number and letter symbols "2N".

1.5.2.2 Second number symbols. The second number symbols for the transistors covered by this specification sheet are as follows: "5671" and "5672".

1.5.3 Suffix symbols. Suffix symbols are not applicable to this specification sheet.

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 – Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 – Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

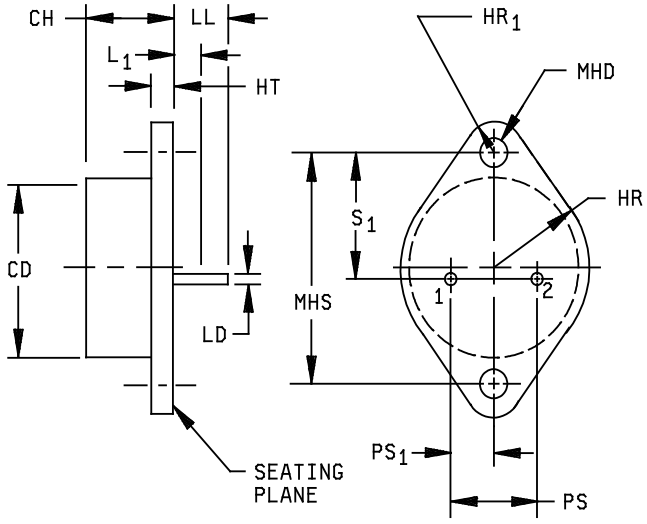

*

Symbol	Dimensions				Notes
	in	in	mm	mm	
	Min	Max	Min	Max	
CD		.875		22.23	
CH	.250	.450	6.35	11.43	
HT	.050	.135	1.27	3.43	
HR	.495	.525	12.57	13.34	
HR_1	.131	.188	3.33	4.78	
LD	.038	.043	0.97	1.09	2
LL	.312		7.92		
L_1		.050		1.27	
MHD	.151	.161	3.84	4.09	
MHS	1.177	1.197	29.90	30.40	
PS	.420	.440	10.67	11.18	4
PS_1	.205	.225	5.21	5.72	4
S_1	.655	.675	16.64	17.15	

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. LD applies between L_1 and LL. Lead diameter shall not exceed twice LD within L_1.
3. Terminal 1, emitter; terminal 2, base; case, collector.
4. These dimensions should be measured at points .050 – .055 inch (1.27 – 1.40 mm) below seating plane. When gauge is not used, measurement will be made at the seating plane.
5. The seating plane of the header shall be flat within .004 inch (0.10 mm) concave to .004 inch (0.10 mm) convex inside a .930 inch (23.62 mm) diameter circle on the center of the header and flat within .006 inch (0.15 mm) concave to .006 inch (0.15 mm) convex overall.
6. Collector shall be electrically connected to the case.

FIGURE 1. Physical dimensions of TO-204AA (similar to TO-3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. Interface and physical dimensions shall be as specified in MIL-PRF-19500, and on figure 1.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Pin-out. The pin-out of the device shall be as shown on figure 1. Terminal 1 is the emitter, terminal 2 is the base, and the collector shall be electrically connected to the case.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in paragraph 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and table I).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

* 4.3 Screening (quality levels JANS, JANTX, and JANTXV only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurements for JANS level	Measurements for JANTX and JANTXV levels
(1) 3c	Thermal impedance (see 4.3.2)	Thermal impedance (see 4.3.2)
9	I_{CEX1} and h_{FE1}	I_{CEX1}
11	I_{CEX1} and h_{FE1}; ΔI_{CEX1} = 100 percent of initial value or 20 µA dc, whichever is greater. Δh_{FE1} = ±15 percent of initial value.	I_{CEX1} and h_{FE1}; ΔI_{CEX1} = 100 percent of initial value or 20 µA dc, whichever is greater.
12	See 4.3.1	See 4.3.1
13	Subgroups 2 and 3 of table I herein. ΔI_{CEX1} = 100 percent of initial value or 20 µA dc, whichever is greater. Δh_{FE1} = ±15 percent of initial value.	Subgroup 2 of table I herein. ΔI_{CEX1} = 100 percent of initial value or 20 µA dc , whichever is greater. Δh_{FE1} = ±25 percent of initial value.

(1) Shall be performed anytime after temperature cycling, screen 3a; JANTX and JANTXV levels do not need to be repeated in screening requirements.

4.3.1 Power burn-in conditions. Power burn-in conditions are T_J = +187.5 ±12.5°C, V_{CB} ≥ 30 V dc, T_A = +35°C max. T_J measurement shall be in accordance with method 3100 of MIL-STD-750.

4.3.2 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{SW}, (and V_H where appropriate). Measurement delay time (t_{MD}) = 70 µs max. See table II, subgroup 4 herein.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIA (JANS) and table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and 4.4.2.1 and 4.4.2.2 herein.

4.4.2.1 Quality level JANS.

Subgroup	Method	Conditions
B4	1037	V_{CB} ≥ 30 V dc, for 2,000 cycles.
B5	1027	V_{CB} ≥ 30 V dc, T_A = +125°C ±25°C for 96 hours; P_T = 6 W at T_A = +112°C or adjusted as required by the chosen T_A to give an average lot T_J = +275°C. Marking legibility requirement shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

4.4.2.2 Quality levels JAN, JANTX, and JANTXV.

Subgroup	Method	Conditions
B3	1027	For eutectic die attach: $T_A \leq +35°C$; adjust P_T to achieve $T_J = +187.5°C \pm 5°C$, $V_{CB} \geq 30$ V dc
B3	1037	For solder die attach: $V_{CB} \geq 30$ V dc, 2,000 cycles.
B6	1032	$T_A = +200°C$.
B7	3053	Load condition C; (unclamped inductive load, see figure 2); $T_C = +25°C$; duty cycle ≤ 10 percent; $R_S = 0.1$ ohm; Test 1: $t_p \approx 150$ µs; $R_{BB1} = 1\Omega$; V_{BB1} = 10 V dc max; $R_{BB2} = 20\Omega$; $V_{BB2} = 4$ V dc; $I_C = 30$ A dc; V_{CC} = 10 V dc, L = 50µH, 0.1Ω Test 2: $t_p \approx 325$ µs; $R_{BB1} = 40\Omega$; V_{BB1} = 10 V dc max; $R_{BB2} = 20\Omega$; $V_{BB2} = 4$ V dc; $I_C = 6.5$ A dc; V_{CC} = 10 V dc, L = 500µH, 0.1Ω
B7		Electrical measurements: See table I, subgroup 2 herein.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500, and as follows.

Subgroup	Method	Conditions
C2	1056	Test condition B.
C2	2036	Test condition A, weight = 10 lbs (4.54 Kg), application time = 15 seconds.
C5	3131	See 4.5.2, $R_{\theta JC} = 1.25°C/W$.
C6	1026	For eutectic die attach: $T_A \leq +35°C$; adjust P_T to achieve $T_J = +187.5°C \pm 5°C$, $V_{CB} \geq 30$ V dc
C6	1037	For solder die attach: $V_{CB} \geq 30$ V dc, 6,000 cycles.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. The conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Thermal resistance. Thermal resistance measurement shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, and t_H. Measurement delay time t_{MD} = 300 ms max. See table E-IX of MIL-PRF-19500. Forced moving air or draft shall not be permitted across the devices during test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

	Inspection 1/	MIL-STD-750		Symbol	Limits	Limits	Unit
		Method	Conditions		Min	Max	
	Subgroup 1						
	Visual and mechanical Inspection	2071					
	Subgroup 2						
	Thermal impedance 2/	3131	See 4.3.2	$Z_{\theta JC}$			°C/W
	Breakdown voltage, collector to emitter	3011	I_C = 200 mA dc; L = 15 mH; 30 Hz ≤ f ≤ 60 Hz, (see figure 3)	$V_{(BR)CEO}$			
	2N5671				90		V dc
	2N5672				120		V dc
	Breakdown voltage, collector to emitter	3011	I_C = 200 mA dc; L = 15 mH; R_{BE} = 50 ohms; 30 Hz ≤ f ≤ 60 Hz (see figure 3)	$V_{(BR)CER}$			
	2N5671				110		V dc
	2N5672				140		V dc
*	Breakdown voltage, collector to emitter	3011	I_C = 200 mA dc; L = 2 mH; V_{BE} = -1.5 V dc; 30 Hz ≤ f ≤ 60 Hz (see figure 3)	$V_{(BR)CEX}$			
	2N5671				120		V dc
	2N5672				150		V dc
	Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 7.0 V dc	I_{EBO}		10	mA dc
	Collector to emitter cutoff current	3041	Bias condition D; V_{CE} = 80 V dc	I_{CEO}		10	mA dc
*	Collector to emitter cutoff current	3041	Bias condition A; V_{BE} = -1.5 V dc	I_{CEX1}			
	2N5671		V_{CE} = 110 V dc			250	µA dc
	2N5672		V_{CE} = 135 V dc			250	µA dc
	Collector to base cutoff current	3036	Bias condition D	I_{CBO}		25	mA dc
	2N5671		V_{CE} = 120 V dc				
	2N5672		V_{CE} = 150 V dc				
	Forward-current transfer ratio	3076	V_{CE} = 2.0 V dc; I_C = 15 A dc; pulsed (see 4.5.1)	h_{FE1}	20	100	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued						
Forward-current transfer ratio	3076	V_{CE} = 5.0 V dc; I_B = 20 A dc; pulsed (see 4.5.1)	h_{FE2}	20		
Collector to emitter voltage (saturated)	3071	I_C = 15 A dc; I_B = 1.2 A dc; pulsed (see 4.5.1)	V_{CE} (sat)1		0.75	V dc
Base emitter voltage (saturated)	3066	Test condition A; I_B = 1.2 A dc; I_C = 15 A dc; pulsed (see 4.5.1)	V_{BE}(sat)		1.5	V dc
Collector to emitter voltage (saturated)	3071	I_C = 30 A dc; I_B = 6 A dc; pulsed (see 4.5.1)	$V_{CE(sat)2}$		5.0	V dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition A; V_{BE} = -1.5 V dc	I_{CEX2}			
2N5671		V_{CE} = 100 V dc			15	mA dc
2N5672		V_{CE} = 100 V dc			10	mA dc
Low temperature operation:		T_A = -65°C				
Forward-current transfer ratio	3076	V_{CE} = 2.0 V dc; I_C = 15 A dc; pulsed (see 4.5.1)	h_{FE3}	10		
Subgroup 4						
Magnitude of small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 10 V dc; I_C = 2.0 A dc; f = 5.0 MHz	$\lvert h_{fe} \rvert$	10	40	
Open circuit output capacitance	3236	V_{CB} = 10 V dc; I_E = 0; 100 kHz ≤ f ≤ 1 MHz	C_{obo}		900	pF

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Conditions		Min	Max	
Subgroup 4 - Continued						
Pulse response:	3251	Test condition A; except test circuit and pulse requirements in accordance with figure 4				
Turn-on time		V_{CC} = 30 V dc ±2 V dc; I_C = 15 A dc; I_{B1} = 1.2 A dc	t_{on}		0.5	µs
Turn-off time		V_{CC} = 30 V dc ±2 V dc; I_C = 15 A dc; I_{B1} = 1.2 A dc; I_{B2} = 1.2 A dc	t_{off}		1.5	µs
Subgroup 5						
Safe operating area (continuous dc)	3051	T_C = +25°C; t ≥ 1 s; 1 cycle; (see figure 5)				
Test 1		I_C = 5.8 A dc; V_{CE} = 24 V dc				
Test 2		I_C = 0.9 A dc; V_{CE} = 45 V dc				
Test 3		I_C = 30 A dc; V_{CE} = 4.67 V dc				
Test 4						
2N5671 only		I_C = 0.19 A dc; V_{CE} = 90 V dc				
Test 5						
2N5672 only		I_C = 0.11 A dc; V_{CE} = 120 V dc				

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits	Limits	Unit
	Method	Conditions		Min	Max	
Safe operating area (switching)	3053	Load condition B; (clamped inductive load) (see figure 6); T_C = +25°C; Duty cycle ≤ 10 percent; t_p > 10 μs; R_S = 0.1 ohm; R_{BB1} = 1Ω; V_{BB1} = 10 V dc max; R_{BB2} = 20Ω; V_{BB2} = 4 V dc; I_C = 30 A dc; V_{CC} = 90 V dc (2N5671) and 120 V dc (2N5672); R_L ≤ 3.0 Ω (2N5671), R_L ≤ 4.0 Ω (2N5672); L = 50 μH, 0.1 Ω; CR = 1N1186A; Clamp voltage = 90 V dc +0, -5 (2N5671); 120 V dc +0, -5 (2N5672). Device fails if clamp voltage is not reached.				
Electrical measurements Subgroups 6 and 7 Not applicable		See table I, subgroup 2 herein				

1/ For sampling plan, see MIL-PRF-19500.
2/ For electrical end-point measurements, this test is required for the following subgroups:
Group B, subgroups 3, 4, and 5 (JANS).
Group B, subgroups 2 and 3 (JAN, JANTX, and JANTXV).
Group C, subgroup 2 and 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) – for qualification or re-qualification only.

Inspection	MIL-STD-750		Sample plan
	Method	Conditions	
Subgroup 1			45 devices c = 0
Temperature cycling (air to air)	1051	Test condition C, 500 cycles.	
Hermetic seal Fine leak Gross leak	1071		
Electrical measurements		See table I, subgroup 2.	
Subgroup 2			45 devices c = 0
Blocking life	1048	Test temperature = +125°C; V_{CB} = 80 percent of rated; T = 1,000 hours.	
Electrical measurements		See table I, subgroup 2.	
Subgroup 4			Sample size N/A
Thermal impedance curves		See MIL-PRF-19500.	
Subgroup 8			45 devices c = 0
Reverse stability	1033	Condition B.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.


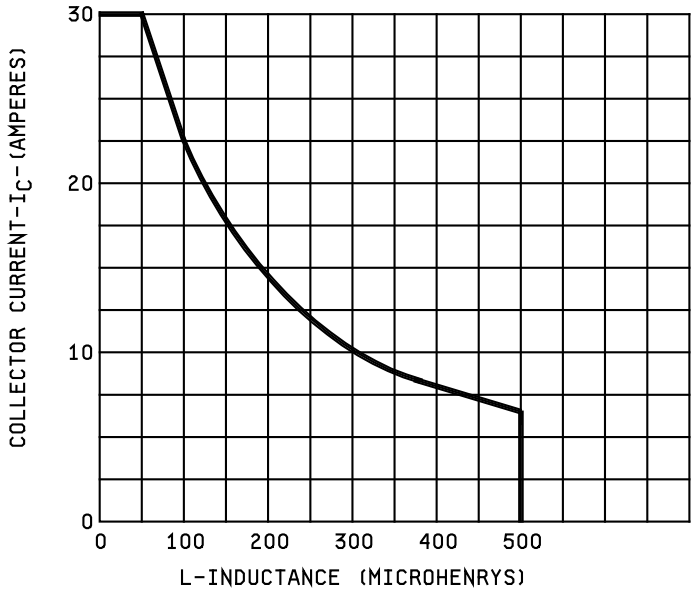


FIGURE 2. Safe operating area for switching between saturation and cutoff (unclamped inductive load).


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

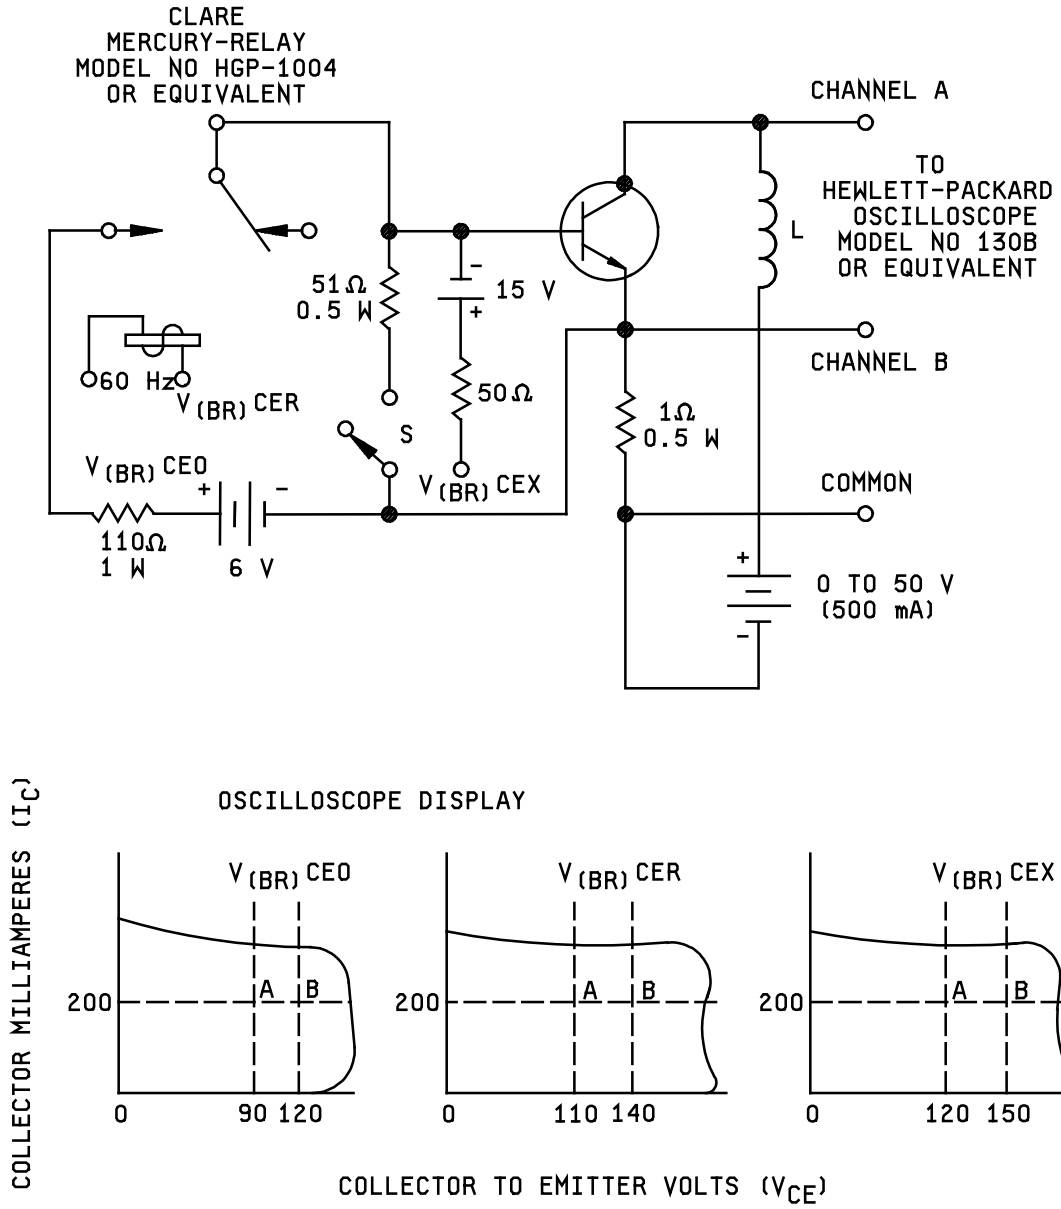

NOTE: $V_{(BR)CEO}$, $V_{(BR)CER}$, $V_{(BR)CEX}$, is acceptable when the trace falls to the right and above point "A" for type 2N5671. The trace shall fall to the right and above point "B" for type 2N5672.

FIGURE 3. Measurement circuit for $V_{(BR)CEO}$, $V_{(BR)CER}$, $V_{(BR)CEX}$.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

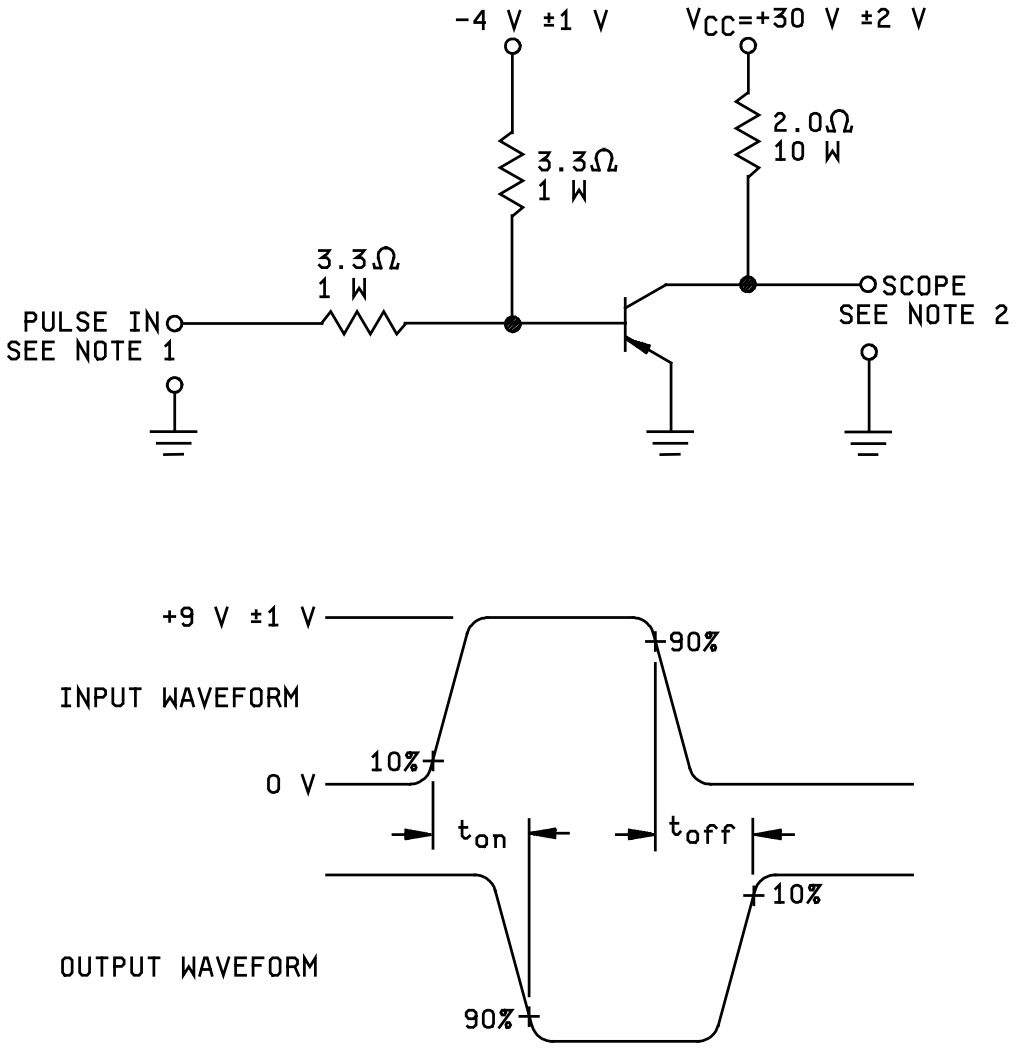

NOTES:

1. The rise time (t_r) and fall time (t_f) of the applied pulse shall be each ≤ 20 ns; duty cycle ≤ 2 percent; generator source impedance shall be 50 ohms; pulse width = 20 μs.
2. Output sampling oscilloscope: Z_{in} ≥ 100 kΩ; C_{in} ≤ 50 pF; rise time ≤ 20 ns.

FIGURE 4. Pulse response test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

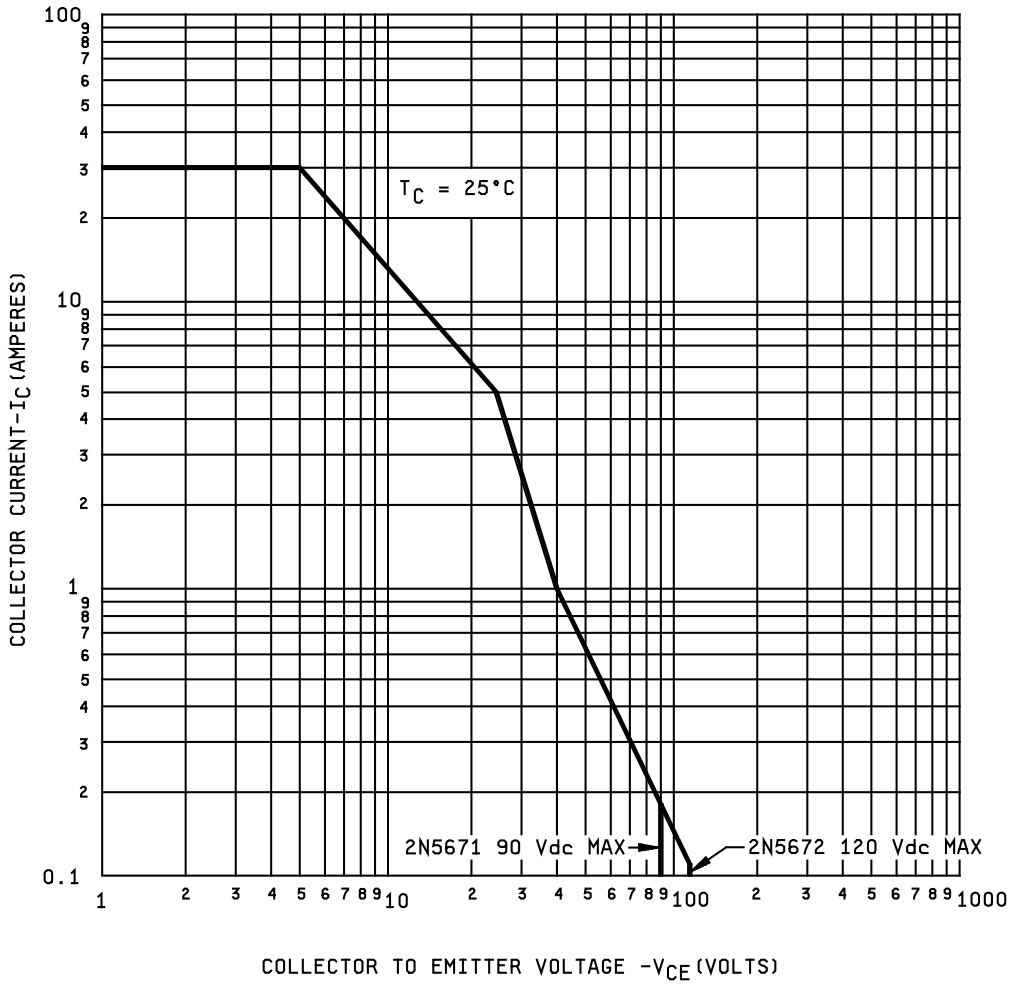


FIGURE 5. Maximum safe operating area graph (continuous dc).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

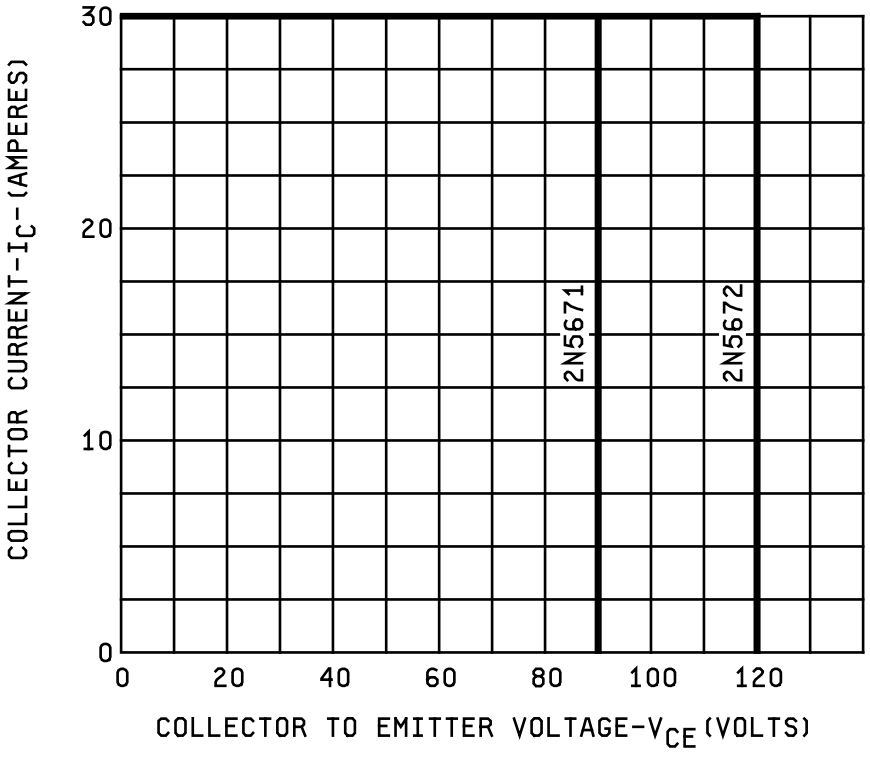


FIGURE 6. Safe operating area for switching between saturation and cutoff (clamped inductive load).

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.


b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. The complete PIN (see 1.5 and 6.4).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at http://qpldocs.dla.mil.

6.4 PIN construction examples. The PINs for encapsulated devices and are constructed using the following form.

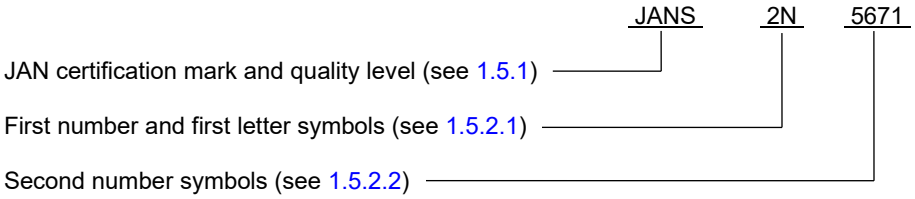

6.5 List of PINs. The following is a list of possible PINs available for encapsulated devices covered by this specification sheet.

JAN quality level	JANTX quality level	JANTXV quality level	JANS quality level
JAN2N5671	JANTX2N5671	JANTXV2N5671	JANS2N5671
JAN2N5672	JANTX2N5672	JANTXV2N5672	JANS2N5672

6.6 Request for new types and configurations. Requests for new device types or configurations for inclusions in this specification sheet should be submitted to: DLA Land and Maritime, ATTN: VAC, Post Office Box 3990, Columbus, OH 43218-3990 or by electronic mail at Semiconductor@dla.mil or by facsimile (614) 693-1642 or DSN 850-6939.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.

* 6.7 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army – CR
* Navy - SH
Air Force - 85
NASA - NA
DLA -CC

Review activities:
Army – AR, MI, SM
* Air Force - 13, 19

Preparing activity:
DLA – CC

(Project 5961-2023-030)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:25Z
Check the source to verify that this is the current version before use.