[INCH-POUND]
M-D-2798
January 4, 1994

FEDERAL SPECIFICATION

DINNERWARE, CHINA (Decorated)

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers white, decorated, restaurant-grade, china dinnerware (see 6.1).

1.2 Classification. The china shall be of the following styles and types.

Style 1 - Navy, Flag Officer's Mess
Style 2 - Navy, Officer's Mess
Style 3 - Army, Medical Corps

Type I - Cup, Drinking (Coffee or Tea)
Type II - Saucer, Cup
Type III - Plate, Eating (Dinner)
Type IV - Plate, Eating (Bread and Butter)
Type V - Plate, Eating (Dessert or Salad)
Type VI - Plate, Eating (Soup or Cereal)
Type VII - Dish, Eating (Fruit)
Type VIII - Cup, Drinking (Coffee Mug)
Type IX - Cup, Drinking (Coffee or Tea)
Type X - Saucer, Cup
Type XI - Plate, Eating (Dessert or Salad)
Type XII - Plate, Eating (Dinner)
Type XIII - Bowl, Eating (Soup)

2. APPLICABLE DOCUMENTS

2.1 Government publications. The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor St., Fort Worth, TX 76102

DISTRIBUTION STATEMENT A : Approved for public release; distribution is unlimited.

FSC 7350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Federal Standards:

FED-STD-376 - Preferred Metric Units For General Use By The Federal Government.
FED-STD-595 - Colors.

(Activities outside the Federal Government may obtain copies of Federal specifications, standards and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification and other Federal specifications, standards and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA, and the GSA-FSS Specification Section (3FBP-W), Suite 8100, 470 E. L'Enfant Plaza, S.W., Washington, DC 20407.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of military standards may be obtained from Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

Federal Laws and Regulations:

Public Law 94-580
U.S. Department of Health and Human Services - Federal Food, Drug, and Cosmetic Act.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on the date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

ASTM

C 368 - Standard Test Method for Impact Resistance of Ceramic Tableware.
C 373 - Standard Test Method for Water Absorption, Bulk Density, Apparent Porosity, and Apparent Specific Gravity of Fired Whiteware Products.
C 554 - Standard Test Method for Crazing Resistance of Fired Glazed Ceramic Whitewares by a Thermal Shock Method.
E 29 - Standard Practice For Using Significant Digits In Test Data To Determine Conformance With Specifications.

(Application for copies of ASTM standards should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references specified herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Design and construction. The base materials shall consist of clay, feldspar, flint, nepheline syenite, and metallic oxide of a quality customarily used for the manufacture of commercial china. The dinnerware shall be a non-porous, fully-vitrified china. The dinnerware shall have a maximum water absorption of 0.4 percent when tested in accordance with ASTM C 373 (on the glazed ware). The dinnerware shall conform to the design and dimensional requirements shown on the applicable drawing for each individual style and type. Each piece of dinnerware shall sit securely on its own foot and not rock.

3.1.1 Dimensional variances. The out of roundness of the dinnerware items shall not exceed 1/8 inch (3.2 mm) while remaining within the overall diameter tolerance limits. The edge warping of types II, III, IV, V, VI, X, XI, and XII shall not exceed 3/16 inch (4.8 mm). The edge warping shall be determined by placing the dinnerware upside down on a flat surface and inserting a feeler gauge between the dinnerware and the flat surface. Differences in rim height due to design and shape considerations shall not be considered as warpage.

3.2 Decoration. Placement of decorations shall be as specified for the individual types. A tolerance of plus or minus 1/16 inch (1.6 mm) shall be allowed in the placement of the distinguishing mark. A tolerance of plus or minus 1/16 inch (1.6 mm) shall be allowed on the width of the decorative band and plus 1/32 inch (0.8 mm), minus 1/64 inch (0.4 mm) on the width of the decorative line, where applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

3.2.1 Style 1, Navy Flag Officer's Mess. The decoration shall consist of a gilt band 1/8 inch (3.2 mm) wide, one gilt line and one dark blue line each 1/32 inch (0.8 mm) wide, and a gilt distinguishing mark (Navy Seal). The distinguishing mark shall conform to figure 1 and shall be of the size specified for each individual type. The dark blue line shall be underglaze and all other decorations shall be coin gold overglaze.

3.2.2 Style 2, Navy Officer's Mess. The decoration for types II through VII shall be dark blue and consist of a band 5/32 inch (4.0 mm) wide, a line 1/32 inch (0.8 mm) wide, and a distinguishing mark (anchor). The decoration for type I shall be dark blue and consist of a band 5/32 inch (4.0 mm) wide, distinguishing mark, and an inverted triangular marking on the outside grasping surface of the handle. The distinguishing mark shall conform to figure 2 and shall be of the size specified for each individual type. The decorations shall be underglaze.

3.2.3 Style 3, Army Medical Corps. The decorations shall consist of a single band, 1/8 inch (3.2 mm) wide, and distinguishing mark (caduceus). The decorations shall be maroon in color and shall be underglazed. The distinguishing mark shall conform to figure 3 and be of the sizes specified for the individual types. The placement of the band shall be 1/8 inch (3.2 mm) ± 1/16 inch (1.6 mm) from the outer edge. The distinguishing mark shall be located 1/8 inch (3.2 mm) ± 1/16 inch (1.6 mm) below the band. The distinguishing mark on the bowl, type XIII, shall be located 1/4 inch (6.4 mm) ± 1/16 inch (1.6 mm) below the band.

3.2.4 Color. The dark blue of the decorations specified in 3.2.1 and 3.2.2 shall be not lighter than color number 15102 nor darker than color number 15050 of FED-STD-595. The maroon of the decorations specified in 3.2.3 shall match one of the following color numbers of FED-STD-595; 11086, 11105, 11136, 11140, 21105, or 21136. The base color of the dinnerware shall approximately match one of the following color numbers of FED-STD-595: 17886, 27780, or 27778. Color shall be uniform and smears, smudges, and thin spots shall not exceed the allowable number of defects specified in table II. If specified, the color shall be judged against a standard sample by the procuring office or agency. The color shall be considered a "close match" provided it is closest in appearance to the required color number than any other color number.

3.3 Performance requirements. The dinnerware items specified in table I shall meet the impact strength and chipping resistance requirements indicated when tested in accordance with ASTM C 368. The dinnerware shall show no crazing or thermal shock of the body after testing for three cycles at 300 degrees Fahrenheit (149 degrees Celsius) in accordance with ASTM C 554. The release of heavy metals from the dinnerware shall comply with the Federal Food, Drug, and Cosmetic Act.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

3.4 Finish. The entire surface of the china dinnerware items shall be covered by a uniform and continuous hard impervious glaze which is cleanable and retains this quality except for the following exceptions. Three pin marks no larger than 1/4 inch (6.4 mm) in diameter from the refractory used to support the ware during firing, four spindle marks no larger than 3/32 inch (2.380 mm) wide and 3/32 inch (2.380 mm) up each side of the foot if the foot is glazed, or a dry foot ring shall be allowable on the bottom surface of the ware. If the refractory leaves a mark on the ware, any protrusion will be dulled in such a manner that the skin can not be cut when rubbed across the protrusion. If the refractory support has removed a piece of ware at the support point, the resultant depression in the surface shall be no larger than 1/4 inch (6.350 mm) in diameter and 1/32 inch (0.793 mm) deep.

TABLE I IMPACT STRENGTH AND CHIPPING RESISTANCE

Types	Dinnerware Article	Impact ft. lbs.	Chipping
I, VIII, IX	Cup, Drinking (rim)	0.10	
II, X	Saucer, Cup	0.10	0.15
III, XII	Plate, Eating (Dinner)	0.20	0.15
IV	Plate, Eating (Bread & Butter)	0.20	0.25
V, XI	Plate, Eating (Dessert or Salad)	0.15	0.25
VI	Plate, Eating (Soup or Cereal)	0.20	0.25
VII	Dish, Eating (Fruit) (rim)	0.20	0.15
XIII	Bowl, Eating (Soup) (rim)	0.25	

Note: Ft.-Lb. / Joule equivalents
0.10 / 0.14
0.15 / 0.20
0.20 / 0.27
0.25 / 0.34

3.5 Marking. The dinnerware shall be permanently marked with the manufacturer's name, brand name, or trademark on the bottom of each item.

3.6 Workmanship. The dinnerware shall be constructed uniformly within the tolerances specified and shall be free from defects as defined in table II.

3.7 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

3.8 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The values stated in parentheses are for informational purposes only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

3.9 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the specification preparing activity for changes to this document.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor certification. The contractor shall certify, and maintain objective quality evidence, that the product offered meets the salient characteristics and requirements of this specification, and, except for any government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the use of the contractor's own or any other facilities suitable for the performance of the inspection requirements specified herein shall be permitted, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.3 Sampling. The levels of inspection and acceptable quality levels (AQL's) shall be in accordance with MIL-STD-105.

4.4 Lot formation. All dinnerware from the same manufacturer of the same style and type offered for delivery at one time shall be considered a lot for purposes of inspection and testing.

4.5 Sampling for visual and dimensional examination. A random sample of dinnerware shall be selected from each lot in accordance with inspection level II. The AQL shall be 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units. The sample unit shall be one finished item of dinnerware. The sample dinnerware shall be visually and dimensionally examined to verify compliance with table II and the remainder of this specification. The viewing distance for visual defects shall be approximately eighteen inches. All dimensions are absolute as defined in ASTM E 29.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects

Inspection	Defect	Classification Major	Minor
Appearance	Kiln dirt (unground) 0.03 inch (0.8 mm) or larger		X
	Kiln dirt (unground) less than 0.03 inch (0.8 mm) or glaze grinding mark: Four or more on face	X	
	Five or more on back		X
Workmanship	Cracks; one or more	X	
	Chips, gouges, or creases; one or more (chips less than 0.06 inch (1.6 mm) on edge and 1/8 inch (3.2 mm) inch on foot which are glazed over are not a defect)	X	
	Lack of uniformity in texture and finish (includes speckles and bulges)	X	
	Large spot (0.06 inch (1.6 mm) or larger); one on face, two or more on back	X	
	Small spot (less than 0.06 inch (1.6 mm)):		
	Four or more on face	X	
	Five or more on back		X
	Large open pinhole or pimple (0.02 inch (0.5 mm) or larger)	X	
	Pinhole or pimple smaller than 0.02 inch (0.5 mm):		
	Four or more on face	X	
	Five or more on back		X
	Absence of complete glazing except 3 pin marks or dry foot ring	X	
	Mold mark on face	X	
	Sharp edge on rim	X	
	Ground pin or fixture mark on back, larger than 1/4 inch (6.4 mm) on round-shaped flatware	X	
	Blister; one or more	X	
	Heavy glaze resulting in open air bubbles or greenish glaze	X	
Construction	Warpage, piece rocks on its foot	X	
	Misplaced handle on hollowware, one that detracts from the appearance and/or function of the cup	X	
	Design/shape not as specified	X	
	Dimensions not as specified	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

TABLE II - (Cont.)

Inspection	Defect	Classification Major	Minor
Decoration	Smudged decoration		X
	Decoration misplacement	X	
	Not color specified	X	
	Irregular color band or line	X	
Marking	Not as specified		X

4.6 Examination for preparation for delivery. A random sample of shipping containers shall be selected from each lot for examination of the unit, intermediate and shipping containers (as applicable) for conformance with the preservation, packaging, packing, labeling, and marking required in the contract or order. Samples shall be selected in accordance with inspection level S-2, AQL 6.5, expressed in terms of defects per hundred units. The sample unit shall be one shipping container.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Intended use. The china dinnerware is intended for use within the U. S. Navy and the U. S. Army Medical Corps.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this specification.
b. Style and type required.
c. The packaging, packing, and marking required.
d. The specific issue of a referenced document, if it is not the issue in effect on the date of issuance of the invitation for bids or request for proposal.

6.3 Part identification numbering system. China dinnerware conforming with this specification shall be identified by a part identification number configuration consisting of identification of a portion of the specification number, style, and type. An example of the part identification number configuration is shown below. This part identification numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part identification numbers are not required to be placed on the product or container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Part Identification Numbering System for M-D-2798

Example: MD2798-11 (MD2798-11) Example - Style 1, Type I, Cup, Drinking

--- Type (1 - I, 2 - II, 3 - III, 4 - IV, 5 - V, 6 - VI, 7 - VII, 8 - VIII 9 - IX, 10 - X, 11 - XI, 12 - XII 13 - XIII)

--- Style (1, 2, or 3)

----- General specification number

6.4 National Stock Numbers (NSNs): The following is a list of NSNs assigned which correspond to this specification.

NSN	Style	Type	P/N
7350-00-272-9359	1	I	MD2798-11
7350-00-272-9529	1	II	MD2798-12
7350-00-271-1704	1	III	MD2798-13
7350-00-271-1701	1	IV	MD2798-14
7350-00-271-1703	1	V	MD2798-15
7350-00-271-1705	1	VI	MD2798-16
7350-00-192-1932	2	IV	MD2798-24
7350-00-192-1933	2	III	MD2798-23
7350-00-192-1938	2	V	MD2798-25
7350-00-222-3288	2	VI	MD2798-26
7350-00-253-0594	2	II	MD2798-22
7350-00-264-5398	2	VII	MD2798-27
7350-00-375-2477	2	I	MD2798-21
7350-00-721-6000	3	XIII	MD2798-313
7350-00-725-6500	3	IX	MD2798-39
7350-00-732-9500	3	VIII	MD2798-38
7350-00-735-6000	3	XI	MD2798-311
7350-00-735-9000	3	XII	MD2798-312
7350-00-737-9000	3	X	MD2798-310
7350-00-738-1000	3	VII	MD2798-37

6.5 Purchase description cross-reference. The following cross-reference is provided to correlate between Purchase Descriptions (PD) FCMG-CLC-002, FCMG-CLC-003, FCMG-CLC-004 and this specification.

NSN	PD #	PD Type	M-D-2798	
			Style	Type
7350-00-721-6000	002	VII	3	XIII
7350-00-725-6500	002	II	3	IX
7350-00-732-9500	002	I	3	VIII
7350-00-735-6000	002	IV	3	XI
7350-00-735-9000	002	V	3	XII
7350-00-737-9000	002	III	3	X
7350-00-738-1000	002	VI	3	VII

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

NSN	PD #	PD Type	M-D-2798 Style	M-D-2798 Type
7350-00-271-1701	003	IV	1	IV
7350-00-271-1703	003	V	1	V
7350-00-271-1704	003	III	1	III
7350-00-271-1705	003	VI	1	VI
7350-00-272-9359	003	I	1	I
7350-00-272-9529	003	II	1	II
7350-00-192-1932	004	IV	2	IV
7350-00-192-1933	004	III	2	III
7350-00-192-1938	004	V	2	V
7350-00-222-3288	004	VI	2	VI
7350-00-253-0594	004	II	2	II
7350-00-264-5398	004	VII	2	VII
7350-00-375-2477	004	I	2	I

MILITARY INTERESTS

Military Coordinating Activity:

Army - GL

Custodians:
Army - GL
Navy - SA
Air Force - 99

Review Activities:
Army - MD, TS
Air Force - 84, 50

User Activity:
Navy - MC

Civil Agency Coordinating Activity:

VA - OSS

PREPARING ACTIVITY:

GSA - FSS

(DoD Project 7350-0262)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.



FIGURE 1

Decoration for Style 1, Navy Flag Officer's Mess

Diameter (+/- 1/16 inch (1.6 mm))
Size A - 1 inch (25.4 mm)
Size B - 3/4 inch (19.0 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

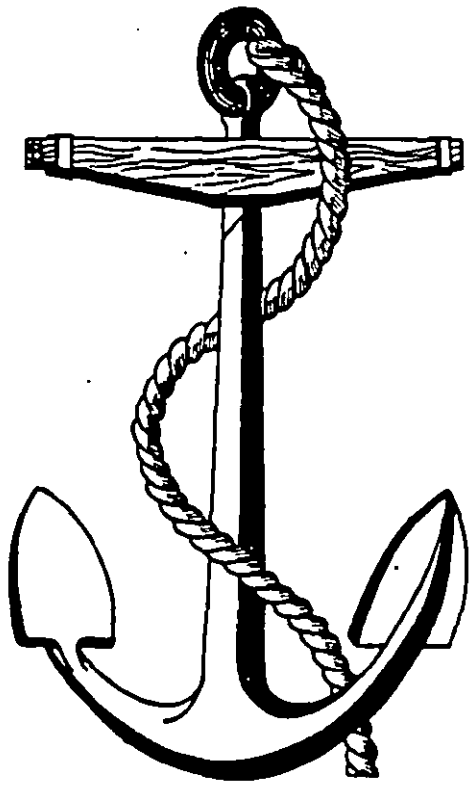


FIGURE 2

Decoration for Style 2, Navy Officer's Mess

Dimension A - 3/4 inch (19.0 mm), +/- 1/16 inch (1.6 mm)
Dimension B - 1/2 inch (12.7 mm), +/- 1/16 inch (1.6 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.



FIGURE 3

Decoration for Style 3, Army Medical Corps
Distinguishing Mark - Caduceus

Height (+/- 1/16 inch (1.6 mm)):
Size A - 1 inch (25.4 mm)
Size B - 3/4 inch (19.0 mm)
Size C - 5/8 inch (15.9 mm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.


Type I - Cup, Drinking (Coffee or Tea)
Styles 1 and 2

Dimensions:


Outside diameter	(A)	- 3-5/8 to 4 inches (9.2 - 10.2 cm)
Height	(B)	- 2-3/8 to 2-11/16 inches (6.0 - 6.8 cm)
Capacity		- 6 to 8 ounces (177 - 237 ml)

The gilt or blue band, as applicable, shall be 1/8 ± 1/16 inch (3.2 ml ± 1.6 ml) below the top edge of the rim. The distinguishing mark shall be on the side away from the user when the cup is held in the right hand.

Style 1
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

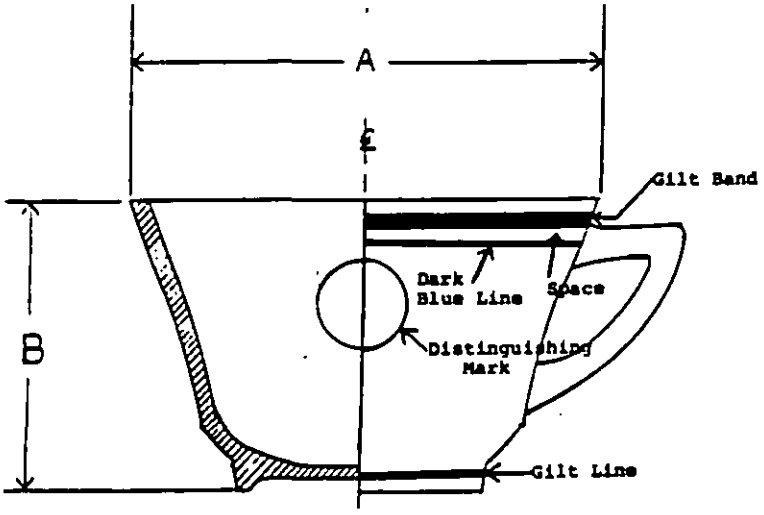

Style 2

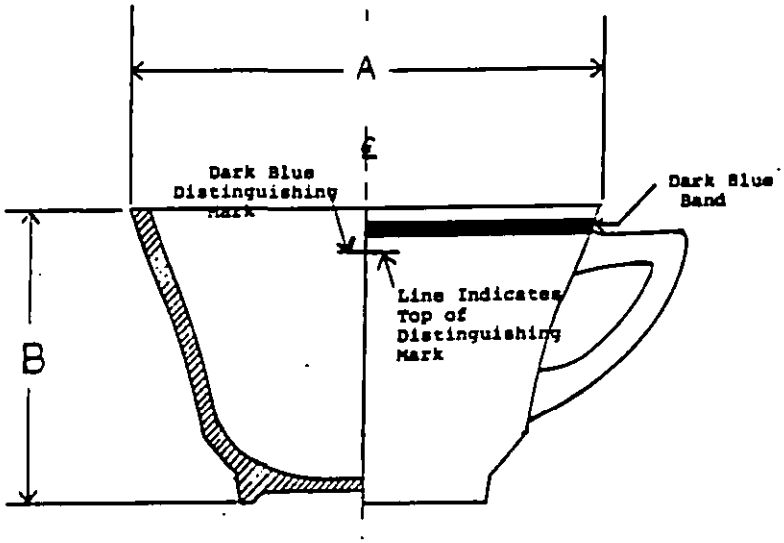


Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.


Type II - Saucer, Cup
Styles 1 and 2


Dimensions:
Outside diameter (A) - 5-15/16 to 6-3/16 inches (15.1 to 15.7 cm)
Height (B) - 1 to 1-1/4 inches (2.5 to 3.2 cm)

The gilt or blue band, as applicable, shall be 1/8 ± 1/16 inch (3.2 mm ± 1.6 mm) from the outer rim. The distinguishing mark shall be located between the band and line, substantially filling the space, but showing clear white between the ends of the mark and the band and line.

Style 1
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

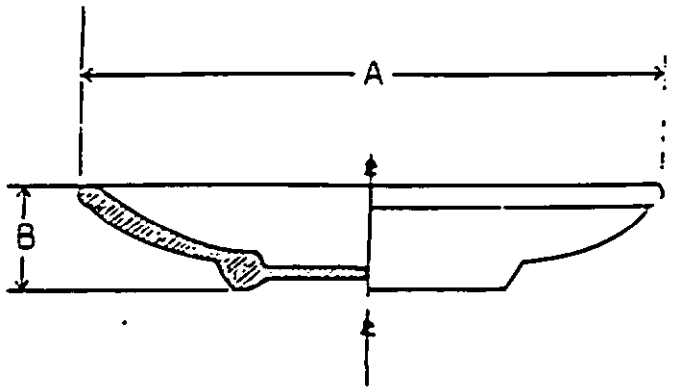

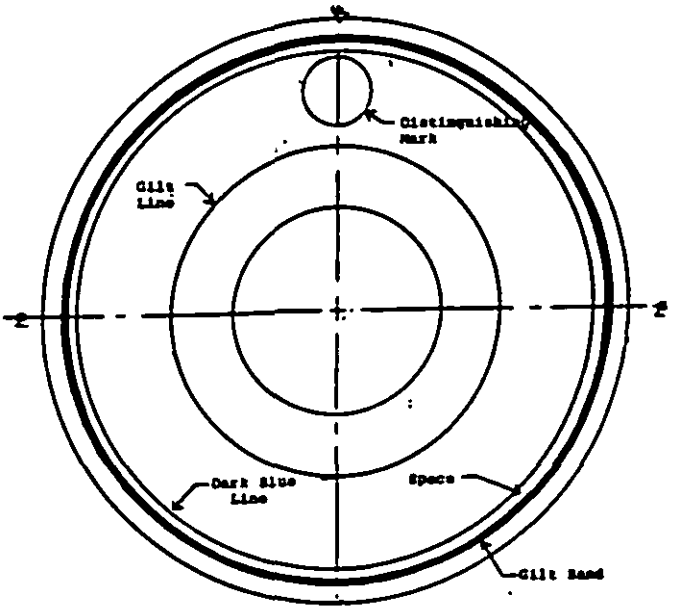

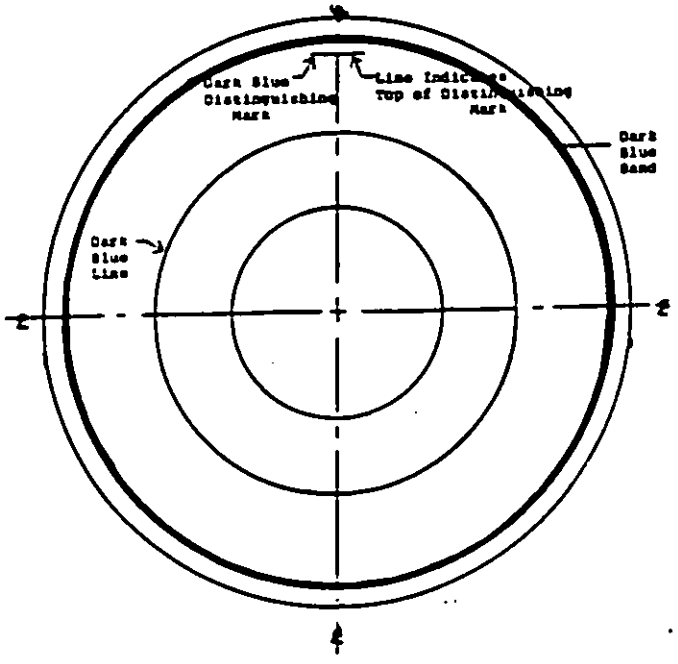

Style 2


Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type III - Plate, Eating (Dinner)
Styles 1 and 2

Dimensions:
Outside diameter (A) - 9-13/16 to 10-3/16 inches (24.9 - 25.9 cm)
Height (B) - 15/16 to 1-1/4 inches (2.4 - 3.2 cm)

The gilt or blue band, as applicable, shall be 1/8 ± 1/16 inch (3.2 mm ± 1.6 mm) from the outer rim. The distinguishing mark shall be located between the band (or line, as applicable) and line.

Style 1
Distinguishing Mark Size A - 1 inch (2.5 cm)

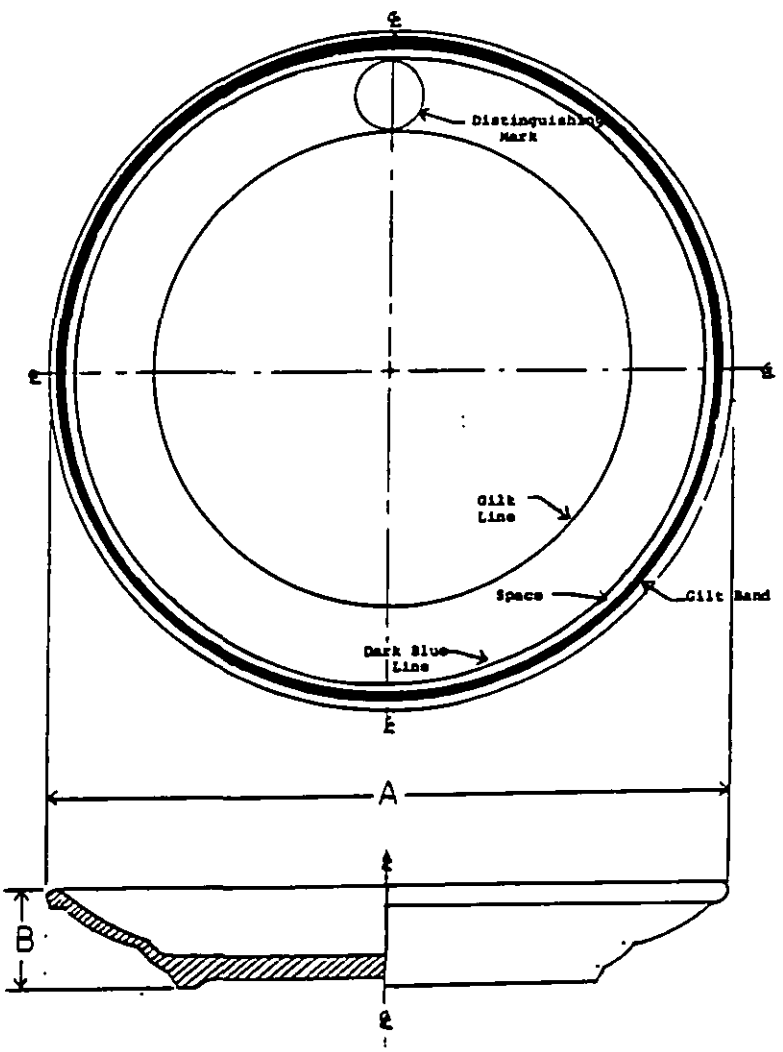


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type III - Plate, Eating (Dinner)

Style 2

The distinguishing mark shall substantially fill the space between the band and line, but shall show clear white between the ends of the mark and the band and line.

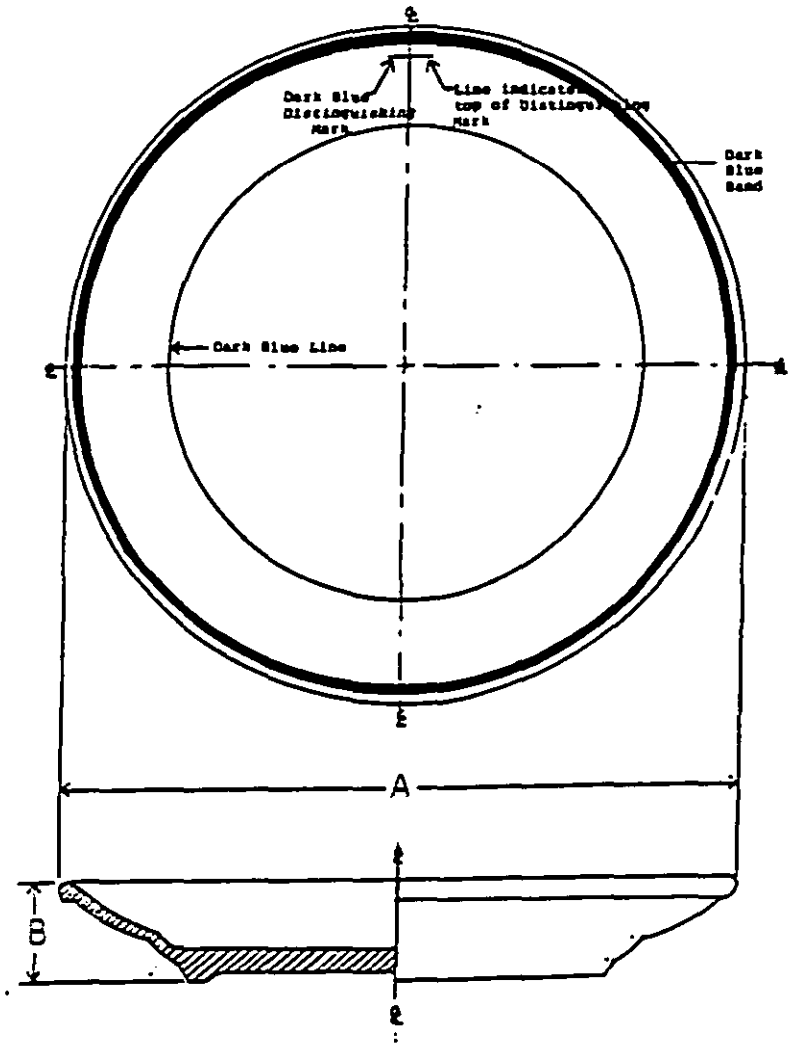


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type IV - Plate, Eating (Bread and Butter)
Styles 1 and 2

Dimensions:
Outside diameter (A) - 6-3/16 to 6-1/2 inches (15.7 - 16.5 cm)
Height (B) - 5/8 to 15/16 inch (15.9 - 23.8 mm)

The gilt or blue band, as applicable, shall be 1/8 ± 1/16 inch (3.2 mm ± 1.6 mm) from the outer rim. The distinguishing mark shall be located between the band (or line, as applicable) and line.

Style 1
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

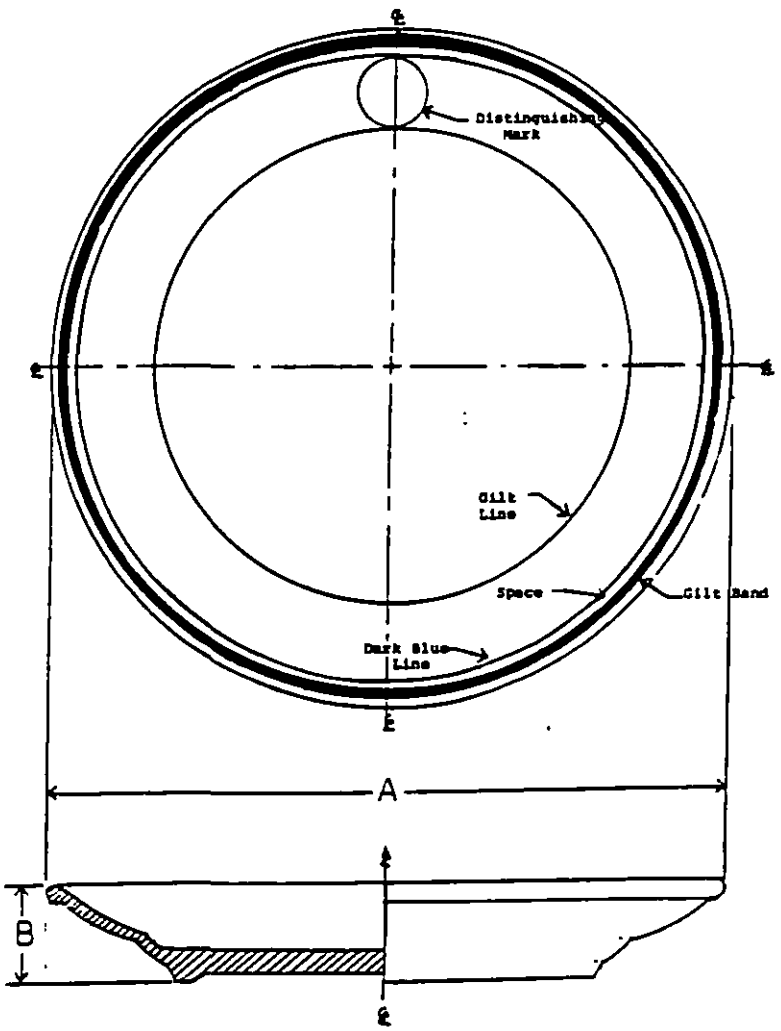


Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type IV - Plate, Eating (Bread and Butter)

Style 2

The distinguishing mark shall substantially fill the space between the band and line, but shall show clear white between the ends of the mark and the band and line.

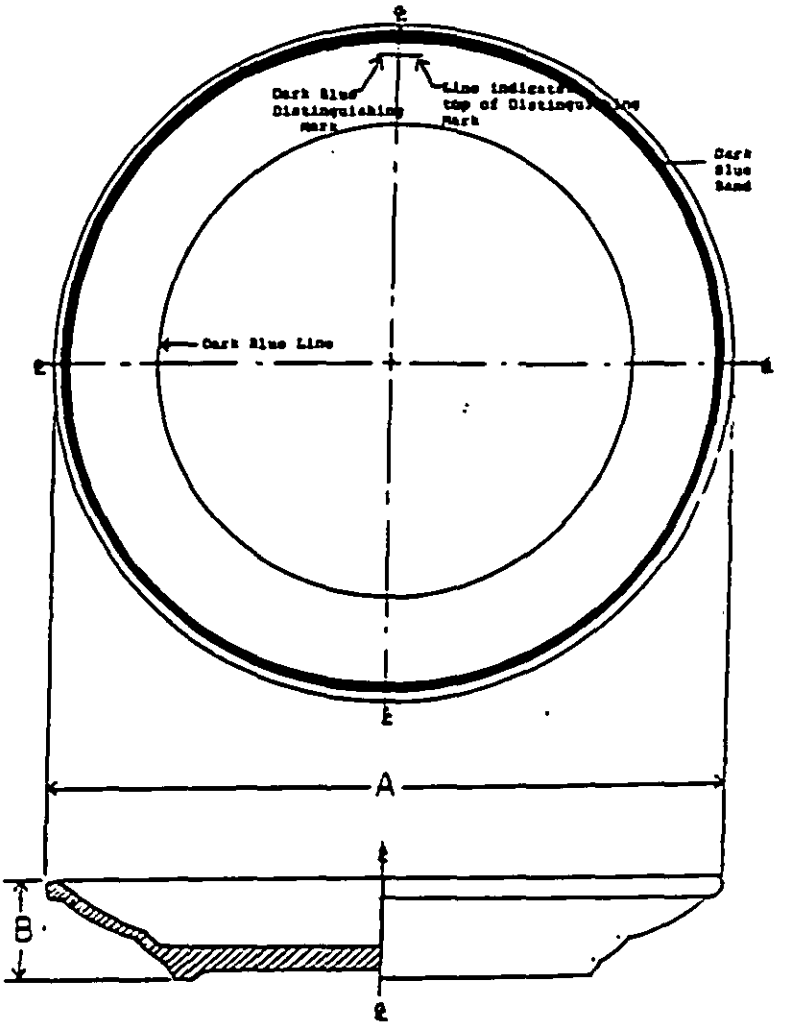


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type V - Plate, Eating (Dessert or Salad)
Styles 1 and 2

Dimensions:
Outside diameter (A) - 7 to 7-1/4 inches (17.8 - 18.4 cm)
Height (B) - 29/32 to 1-1/8 inches (23.0 - 28.5 mm)

The gilt or blue band, as applicable, shall be 1/8 inch ± 1/16 inch (3.2 mm ± 1.6 mm) from the outer rim. The distinguishing mark shall be located between the band (or line, as applicable) and line.

Style 1
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

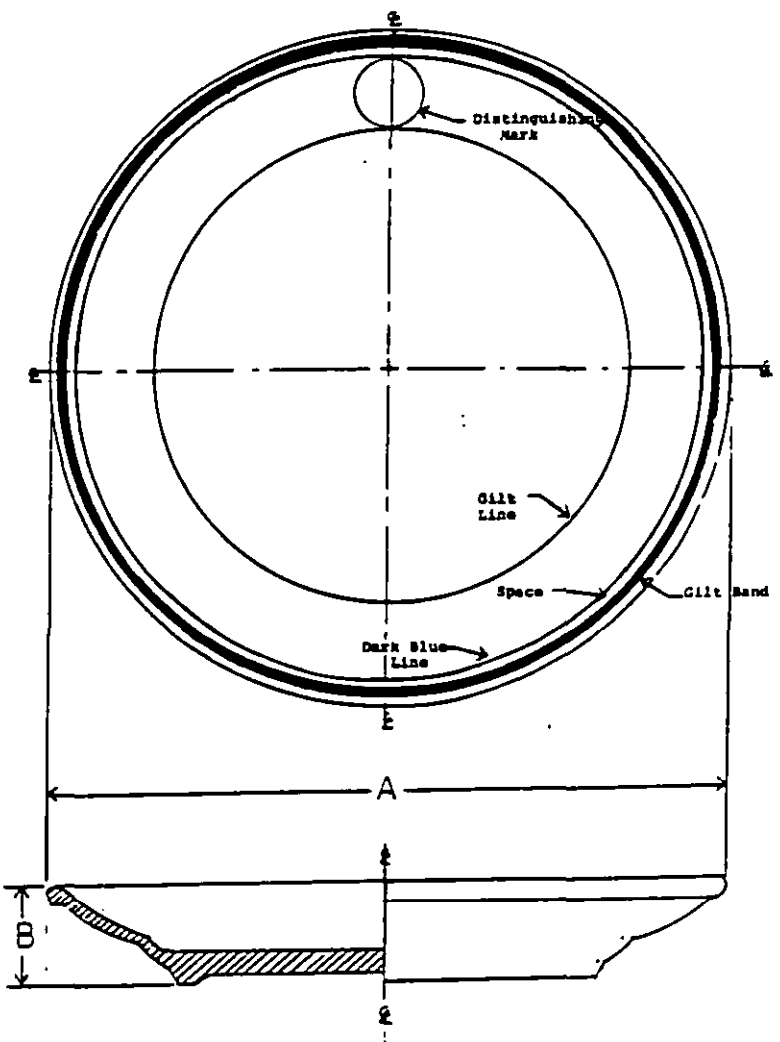


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type V - Plate, Eating (Dessert or Salad)

Style 2

The distinguishing mark shall substantially fill the space between the band and line, but shall show clear white between the ends of the mark and the band and line.

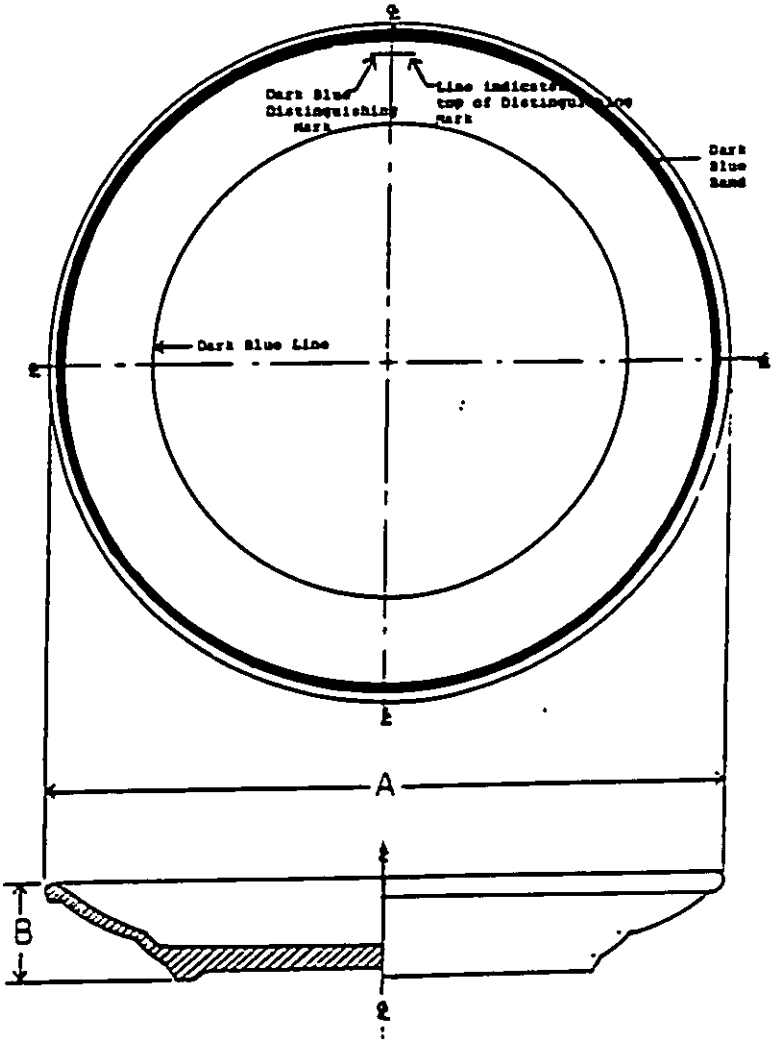


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type VI - Plate, Eating (Soup or Cereal)
Styles 1 and 2

Dimensions:
Outside diameter (A) - 6-25/32 to 7-1/16 inches (17.2 - 17.9 cm)
Height (B) - 1-3/32 to 1-5/8 inches (2.8 - 4.1 cm)

The gilt or blue band, as applicable, shall be 1/8 inch ± 1/16 inch (3.2 mm ± 1.6 mm) from the outer rim. The distinguishing mark shall be located between the band (or line, as applicable) and line.

Style 1
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

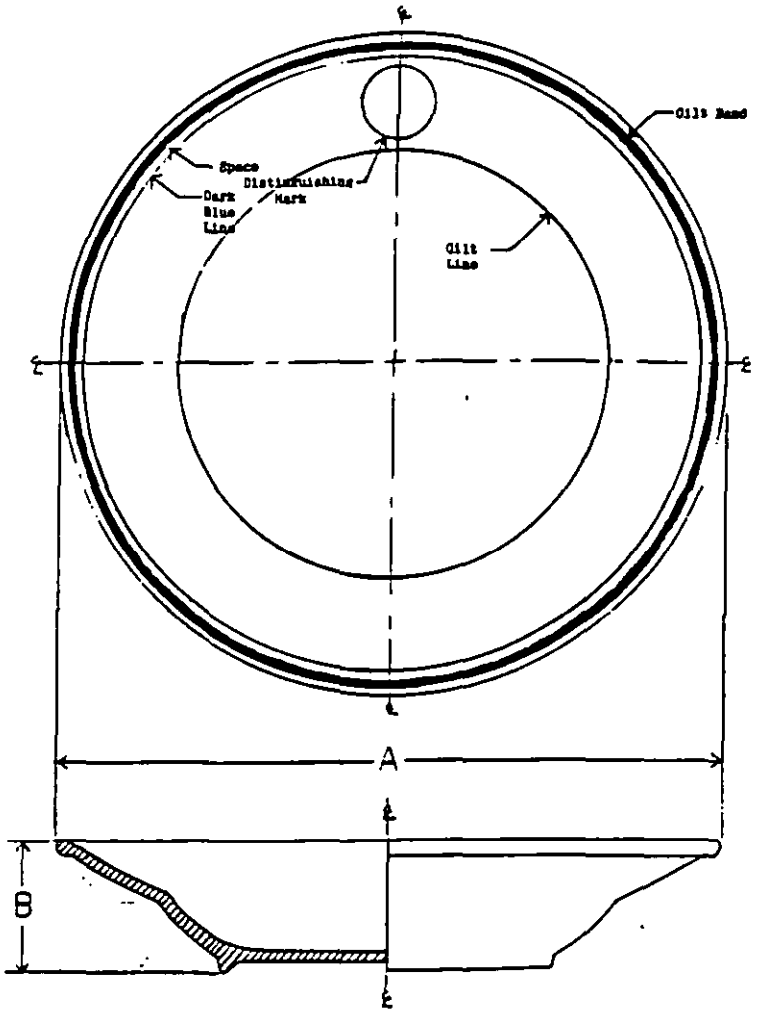


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type VI - Plate, Eating (Soup or Cereal)

Style 2

The distinguishing mark shall substantially fill the space between the band and line, but shall show clear white between the ends of the mark and the band and line.

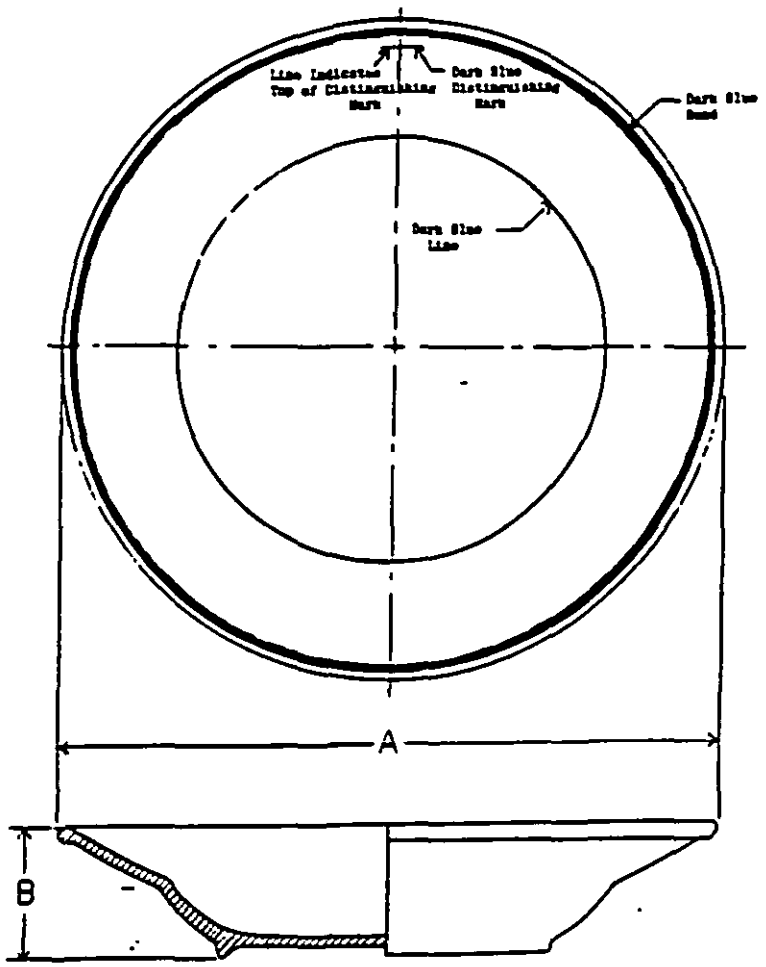

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:11Z
Check the source to verify that this is the current version before use.


Type VII - Dish, Eating (Fruit)
Styles 2 and 3

Dimensions:
Outside diameter (A) - 5 to 5-1/4 inches (12.7 - 13.3 cm)
Height (B) - 1-3/8 to 1-5/8 inches (3.5 - 4.1 cm)

For style 2, the blue band shall be 1/8 inch ± 1/16 inch (3.2 mm ± 1.6 mm) from the outer rim. The distinguishing mark shall be located between the band and line, substantially filling the space, but showing clear white between the ends of the mark and the band and line.

For style 3, the distinguishing mark shall be size C, 5/8 inch (15.9 mm).

Style 2

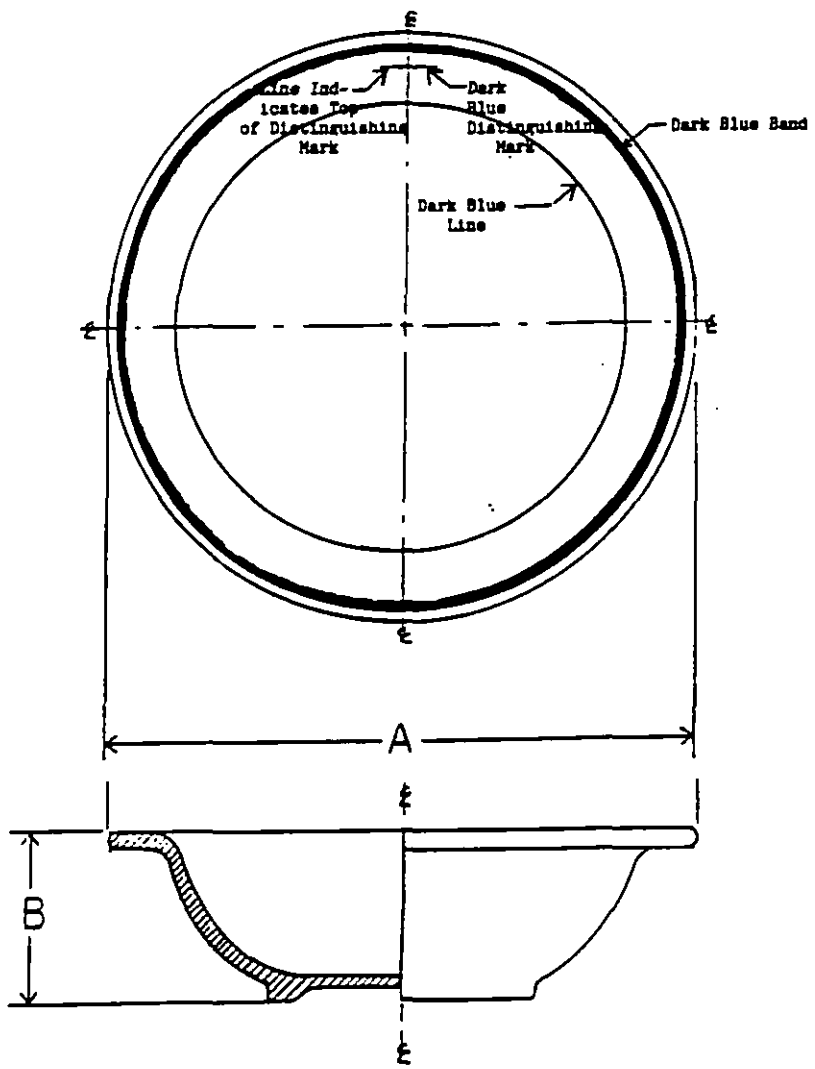


Source: https://assist.dla.mil -- Downloaded: 20260-26T11:11Z
Check the source to verify that this is the current version before use.


Type VIII - Cup, Drinking (Coffee Mug)
Style 3


Dimensions:

Outside diameter - 3-3/8 to 3-5/8 inches (8.6 - 9.2 cm)
Height - 3-1/2 to 3-3/4 inches (8.9 - 9.5 cm)
Capacity - 7 to 10 ounces (207 - 296 ml)
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

The distinguishing mark shall be located on the side away from the user when the cup is held in the right hand.

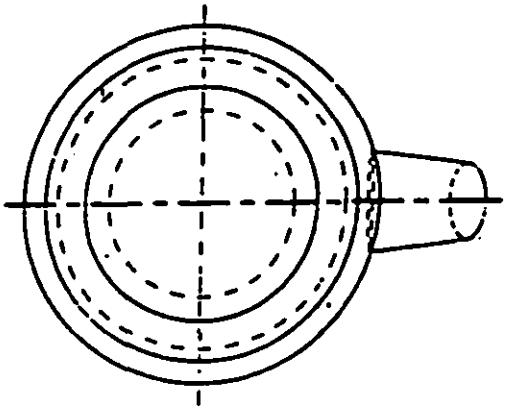

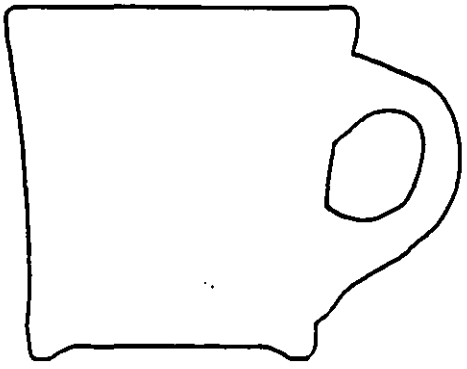

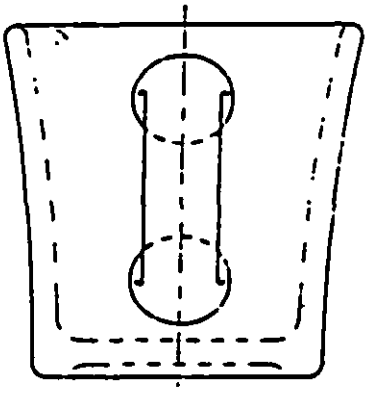


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.


Type IX - Cup, Drinking (Coffee or Tea)
Style 3


Dimensions:

Outside diameter - 3-11/16 to 3-15/16 inches (9.4 - 10.0 cm)
Height - 2-3/16 to 2-3/8 inches (5.6 - 6.0 cm)
Capacity - 6 to 8 ounces (177 - 237 ml)
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

The distinguishing mark shall be located on the side away from the user when the cup is held in the right hand.

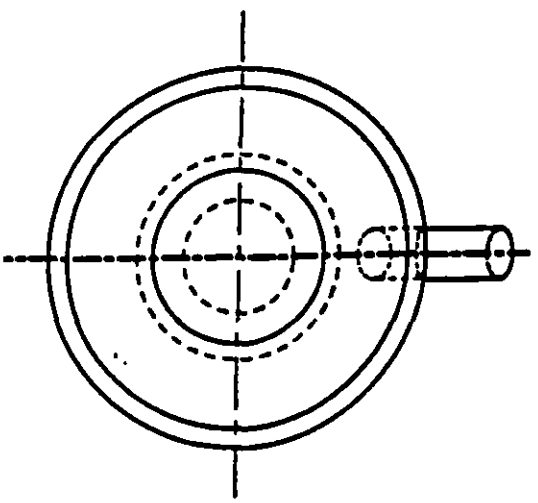

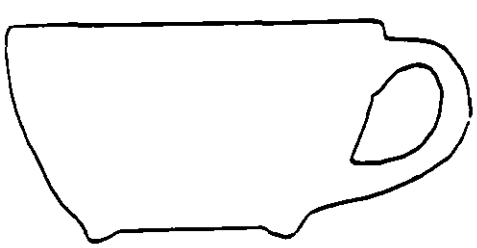

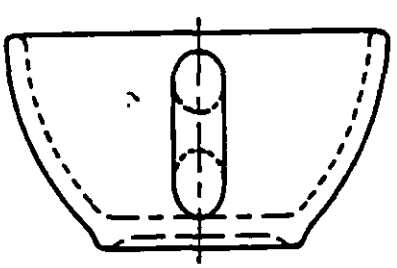


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type X - Saucer, Cup
Style 3

Dimensions:

Outside diameter - 5-7/16 to 5-11/16 inches (13.8 - 14.4 cm)
Height - 7/8 to 1-1/16 inches (22.2 - 27.0 mm)
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

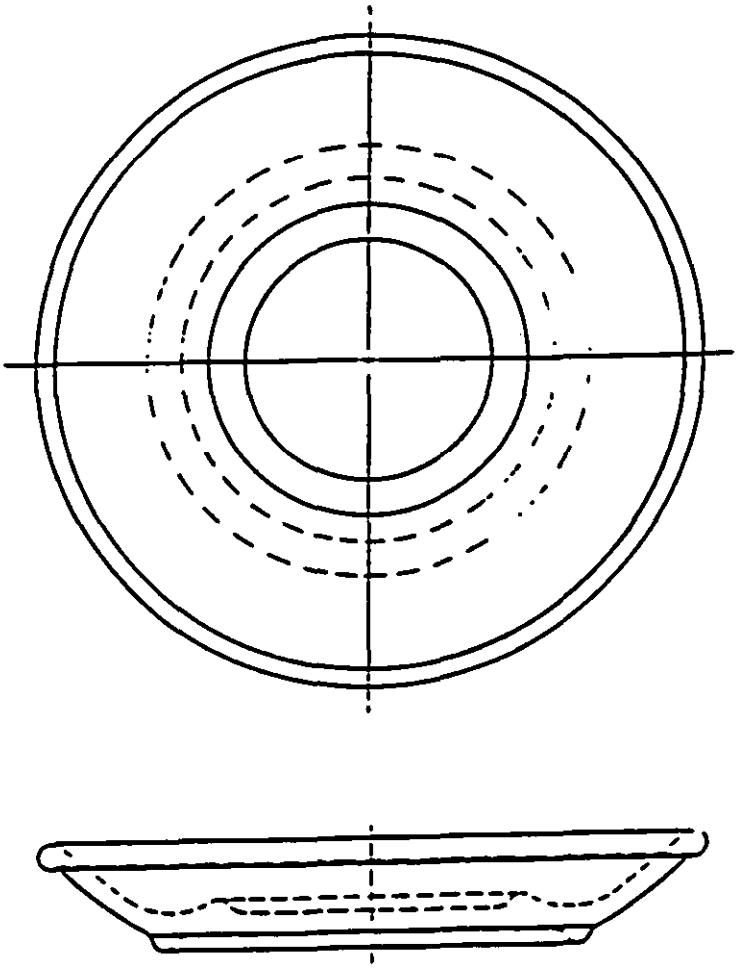


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type XI - Plate, Eating (Dessert or Salad)
Style 3

Dimensions:

Outside diameter - 6-3/16 to 6-7/16 inches (15.7 - 16.4 cm)
Height - 3/4 to 1-1/16 inch (19.0 - 27.0 mm)
Bottom thickness - 1/8 inch minimum (3.2 mm)
Rim width - 1/2 to 3/4 inch (12.7 - 19.0 mm)
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

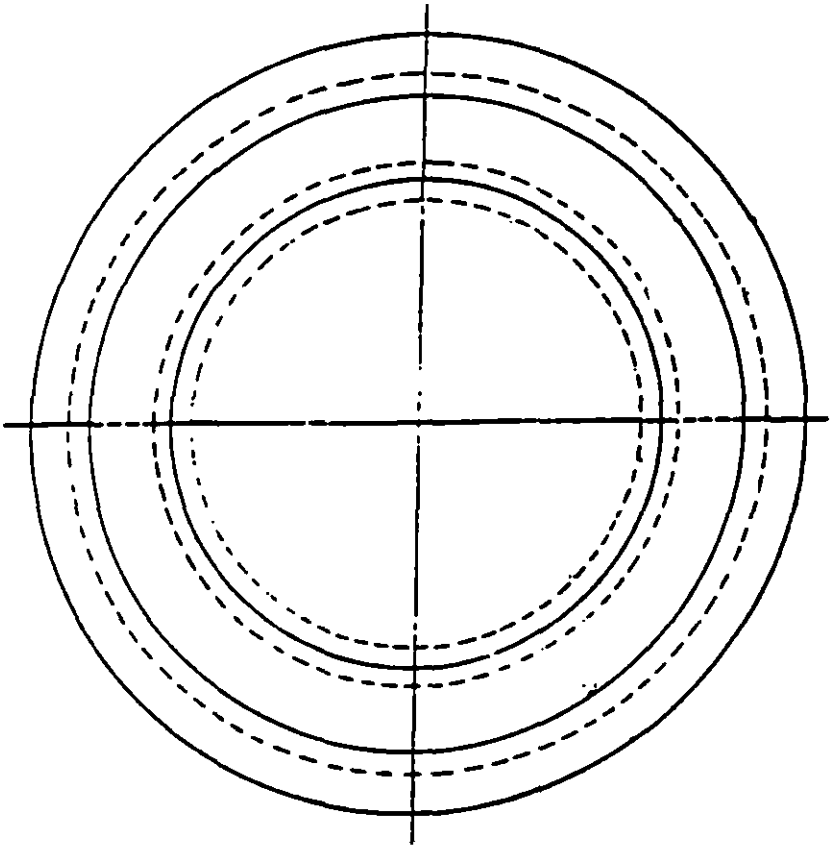


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type XII - Plate, Eating (Dinner)
Style 3

Dimensions:

Outside diameter - 8-15/16 to 9-1/4 inches (22.7 - 23.5 cm)
Height - 13/16 to 1-1/8 inches (20.6 - 28.6 mm)
Distinguishing Mark Size A - 1 inch (2.5 cm)

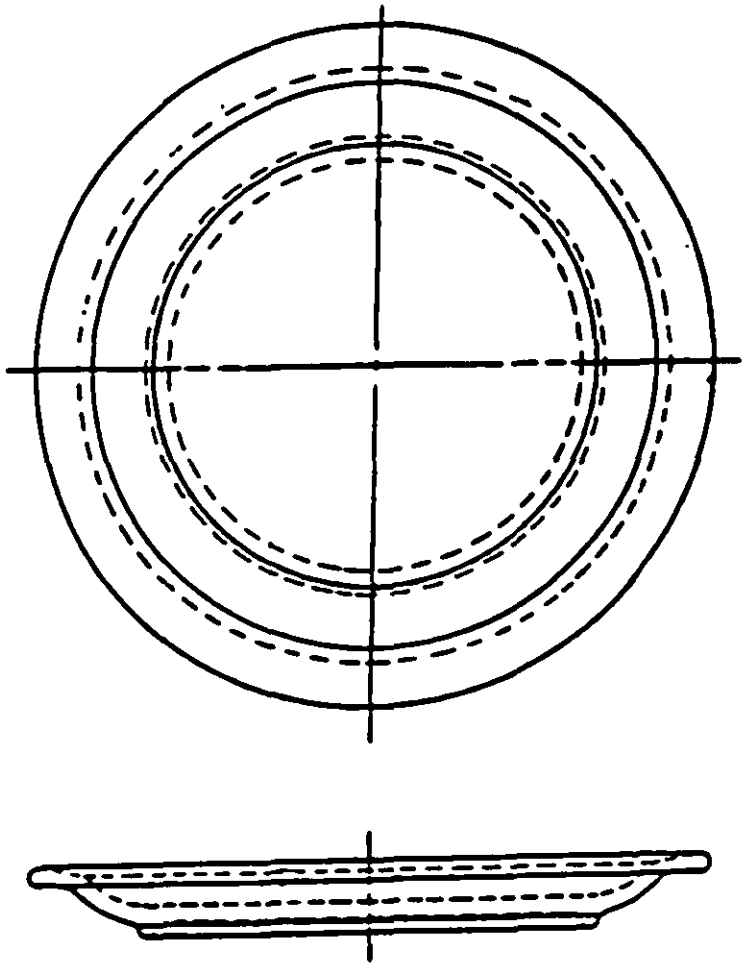



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.

Type XIII - Bowl, Eating (Soup)
Style 3

Dimensions:

Outside diameter - 5-9/16 to 5-7/8 inches (14.1 - 14.9 cm)
Height - 2 to 2-5/16 inches (5.1 - 5.9 cm)
Distinguishing Mark Size B - 3/4 inch (19.0 mm)

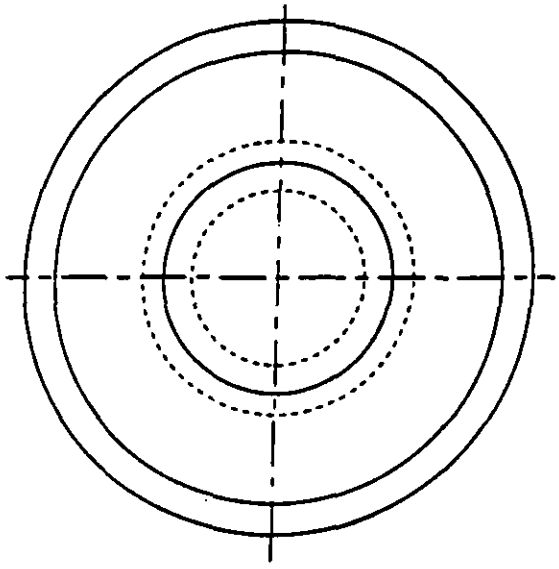

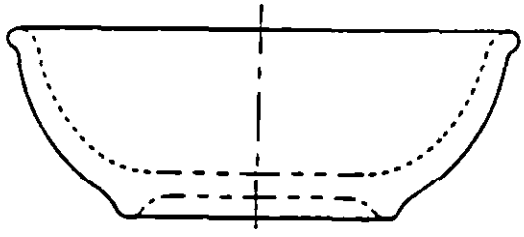

Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:11Z
Check the source to verify that this is the current version before use.