METRIC

DOD-B-63545/2
19 FEBRUARY 1982

MILITARY SPECIFICATION SHEET

BOLT, RIBBED SHOULDER, EXTENDED SHOULDER, WHEEL MOUNTING, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the bolts described herein shall consist of this specification and the latest issue of DOD-B-63545.

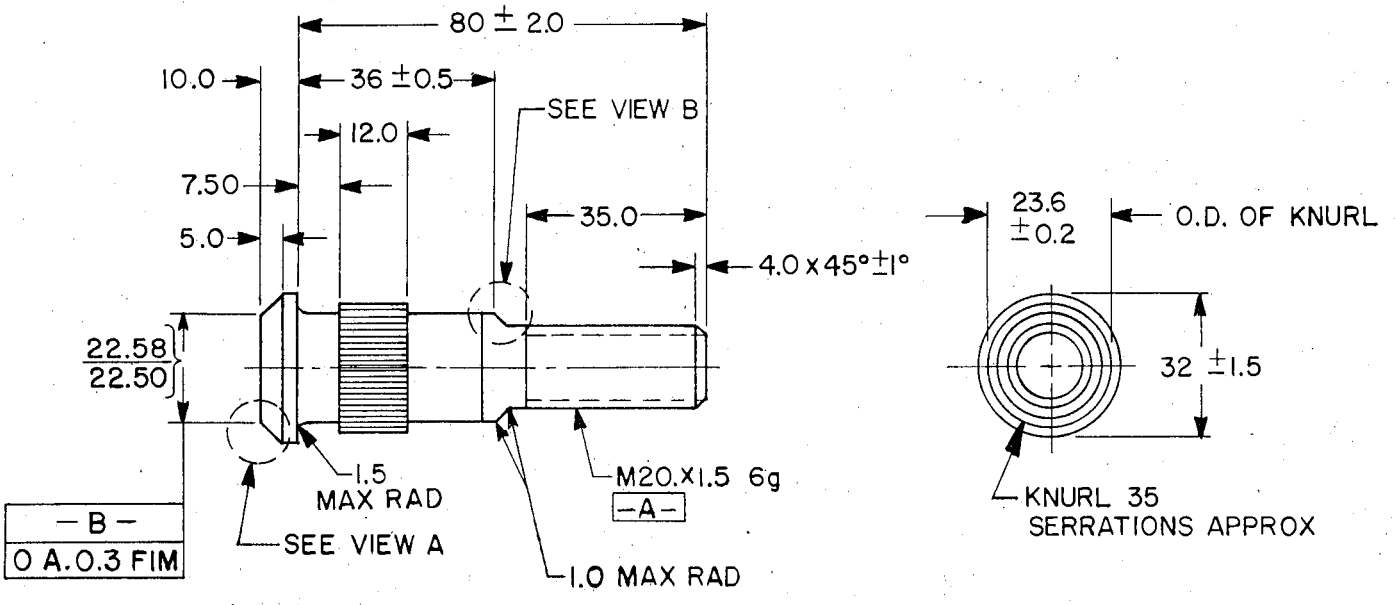


FIGURE 1. Bolt, ribbed shoulder, extended shoulder, wheel mounting.

FSC 5306

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.

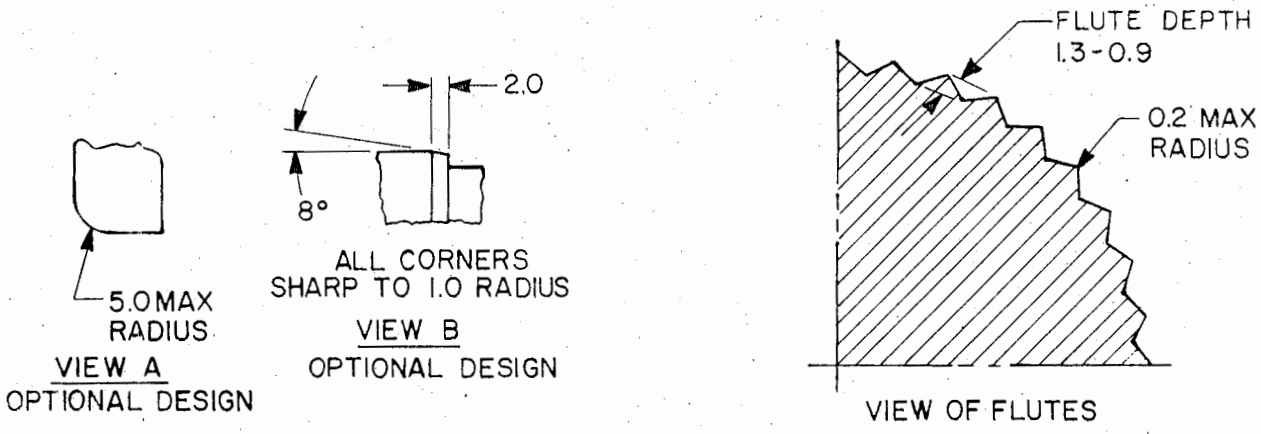


FIGURE 2. Optional views.

NOTES:

1. This standard is not intended to limit construction to features other than as shown herein by dimensions, notations, and referenced documents.
2. Tolerance on angles $\pm 1^{\circ}$.

REQUIREMENTS:

1. Material. Steel alloy 4135, 4137, 4140, 5135, 5140, 8637, 8640, 8740 per FED-STD-66.
2. Hardness. Bolts shall have a hardness of 33-39HRC. Restore surface carbon if necessary to produce a surface hardness of HR15N-78-84 or equivalent. Heat treatment shall not be accomplished in presence of nitrogen compounds.
3. Material from root of serrations must not burr or increase shoulder diameter.
4. Part number. The part number consists of the letter "D" followed by the basic number of this specification sheet. Add "Z" after specification sheet number for zinc plating. Add "C" after specification sheet number for cadmium plating.

   Example: D63545/2-Z = M20X1.5 bolt, zinc plated.
   D63545/2-C = M20X1.5 bolt, cadmium plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review activities:
Army - AT
Navy - SH, MC
DLA - IS
NSA - NS

User activities:
Army - ME
Navy - OS

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5306-0694)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:05Z
Check the source to verify that this is the current version before use.