MILITARY SPECIFICATION

CONNECTOR, ELECTRICAL, RECEPTACLE: 10526125

This amendment forms a part of Military Specification MIL-C-60174(MU), dated 19 March 1965.

Paragraph 2.1: Delete the following specification:

"MIL-C-5015 Connectors, Electric, AN Type
MIL-C-8384 Connectors, Plug and Receptacle, Electrical: General Specification for"

and substitute

"MIL-C-21097 Connectors, Electrical, Printed Wiring Board, General Purpose, General Specification for"

Paragraph 3.1.1: Delete and substitute:

"Insertion force.- The insertion force required to insert an .066 steel gage after five (5) insertions shall not exceed 48 pounds and in addition, the insertion force required to insert an .066 steel gage after ten (10) insertions of an .071 circuit board shall not exceed 40 pounds.

Paragraph 3.1.2, third sentence: Delete "0.005 inch" and substitute "0.008 inch".

Paragraph 3.2.1: Delete "0.061 to 0.063" and substitute "0.061 to 0.062"; Delete "4 to 8 ounces" and substitute "3 to 8 ounces"; Delete "-of the board."

Paragraph 3.4.3.1: Delete "3.5.2" and substitute "3.5."

Paragraph 4.2.4: Delete and substitute:

"4.2.4 Functional tests.- The requirements and tests in Table I shall be inspected on at least two (2) of every 1000 connectors produced except 4.5.3.1 should be inspected on at least 2 out of each day's production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

TABLE I

	CHARACTERISTICS	REQUIREMENTS	TEST PROCEDURES
101.	Contact resistance	3.2.1, 3.5.3	4.5.2.3
102.	Insertion and separation forces (cycled)	3.1.1	4.5.3.2
103.	Insertion and separation forces (uncycled)	3.2.1	4.5.3.1
104.	Contact float	3.1.2	4.5.3.3
105.	Vibration	3.4.1	4.5.1.1
106.	Shock	4.3.2	4.5.1.2

Paragraph 4.3.2.1 and TABLE III: Delete

Paragraph 4.3.2.2: Delete and substitute:

"4.3.2.2 Miscellaneous: Two (2) connectors shall be selected at random by a Government representative as a standard sample from the first 100 connectors produced, and two (2) connectors from each subsequent 2000 units produced. The control samples shall have met the requirements and tests of Table IV except that Characteristic 308 need only be performed on the first two samples."

Table IV: Add the following:

"313.	Vibration	3.4.1	4.5.1.1
314.	Shock	3.4.2	4.5.1.2"

Paragraph 4.4.1.1:

Item 3 - Delete "0.062 ± 0.001" and substitute "$0.062^{+.000}_{-.001}$"

Item 8 - Delete "Maximum thickness of finished board shall not exceed 0.071 inch" and substitute "Thickness of finished board shall be $0.071^{+.000}_{-.001}$ inch".

Add "Item 10 Steel Gage - Outline as shown in Figure 1".

Paragraph 4.5.1.9: Delete "one of the first 5 units" and substitute "two of the first 5 units".

Paragraph4.5.2.3: Delete "Figure 2 of MIL-C-8384" and substitute "Figure 1a of MIL-C-21097".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

Paragraph 4.5.3.1: Delete and substitute:

"4.5.3.1 Insertion and separation forces (uncycled).- After 5 insertions of an .066 gage, the insertion force of the .066 gage shall not exceed 48 pounds and the withdrawal force of each contact pair of an .062 board shall be a minimum of 40 ounces."

Paragraph 4.5.3.2: Delete and substitute:

"4.5.3.2 Insertion and separation forces (cycled).- Insert an .066 gage for 500 cycles, after which an .062 printed circuit board, of such a width as to engage only one pair of contacts shall be inserted. The withdrawal force of any contact pair shall be 4 ounces minimum. Insert an .071 printed circuit board for ten cycles, after which the insertion force of an .066 steel gage shall not exceed 40 pounds. Insert an .062 printed circuit board of such a width as to engage only one pair of contacts. The withdrawal force of any contact pair shall be 3 ounces minimum."

Add: Figure 1.

Custodian:

Army - MU


Preparing activity:

Army - MU

Project No. 1220-A299Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:14Z
Check the source to verify that this is the current version before use.

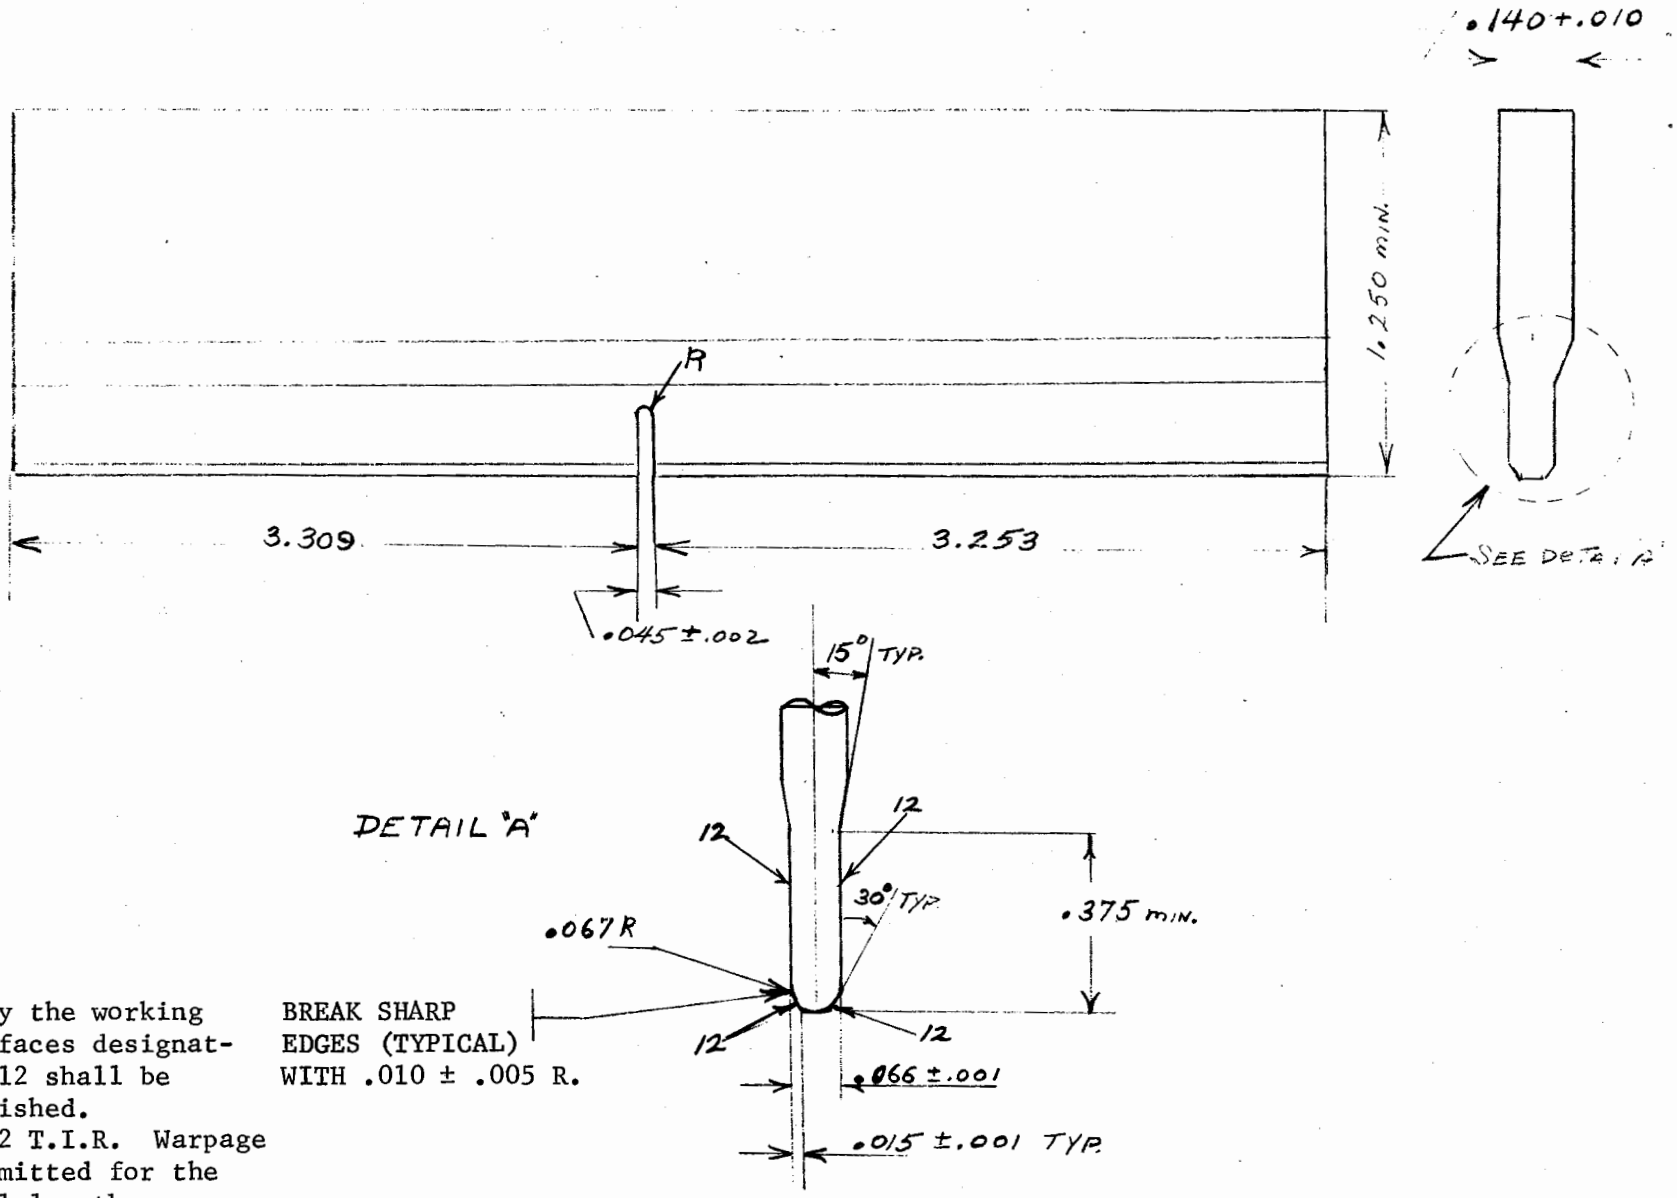

DETAIL A

NOTES:

1. Only the working surfaces designated 12 shall be finished. BREAK SHARP EDGES (TYPICAL) WITH .010 ± .005 R.
2. .002 T.I.R. Warpage permitted for the full length.
3. Tolerance: ±.005 unless otherwise shown.
4. Material: Hardened tool steel Rockwell "C" 50-55

FIGURE 1 MECHANICAL GAGE