
INCH-POUND
MIL-PRF-55339/14A
10 January 2005
SUPERSEDING
MIL-PRF-55339/14
6 May 1975

PERFORMANCE SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY, RIGHT ANGLE (WITHIN SERIES BNC JACK TO SERIES BNC PLUG), CLASS 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-55339.

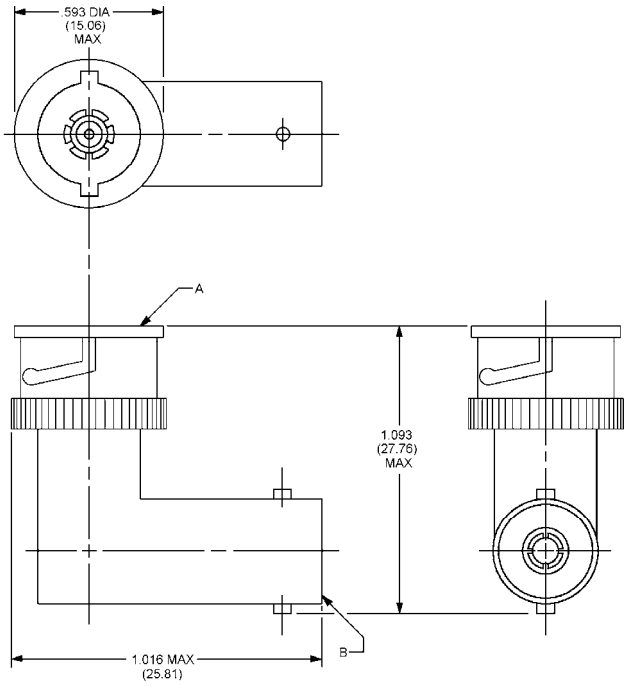

Reference	Series	Contact
A	BNC	Pin
B	BNC	Socket

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All undimensioned pictorial representations are for reference purposes only.
4. Interface dimensions shall be in accordance with MIL-STD-348.

FIGURE 1. General configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nominal.

Working voltage:

Sea level: 500 Vrms.

70,000 feet (4.437 kPa): 125 Vrms.

Frequency range: 0 to 4 GHz.

Temperature range: -65º to +165ºC.

PERFORMANCE (installation torque is not applicable).

Dimensions: See figure 1 and MIL-STD-348.

Center contact retention:

Axial force: 6 lb (26.69 N) minimum.

Torque: 4 in. oz (1.11 Nm), minimum.

Force to engage and disengage:

Longitudinal force: 3 lb (13.34 N), maximum.

Torque: 2.5 in. lb (0.28 Nm), maximum.

Coupling proof torque: Not applicable.

Mating characteristics:

Center contact (socket):

Oversize test pin diameter: .057 inch (1.45 mm), minimum.

Insertion depth: .125 inch (3.17 mm), minimum.

Number of insertions: 1.

Maximum test pin (insertion force test):

Steel test pin diameter: .054 inch (1.37 mm), minimum.

Pin finish: 16 microinches (.406 µm).

Insertion force: 2 lb (8.90 N), maximum.

Number of insertions: 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

Minimum test pin (withdrawal force):

Steel test pin diameter: .052 inch (1.32 mm), maximum.

Pin finish: 16 microinches (.406 µm).

Withdrawal force: 2 oz (0.56 N), minimum.

Number of withdrawals: 1.

Outer contact:

Minimum test ring ID: .391 inch (9.93 mm), maximum.

Ring finish: 16 microinches (.406 µm).

Insertion force: 5 lb (22.24 N), maximum.

Insertion depth: .093 inch (2.36 mm), minimum.

Number of insertions: Not applicable.

Maximum test ring ID: .324 inch (8.25 mm), minimum.

Test ring finish: Not applicable.

Insertion depth: .031 inch (0.79 mm), maximum.

Number of insertions: Not applicable.

Permeability: <2.0

Seal:

Hermetic: Not applicable.

Pressurized: Not applicable.

Weatherproof: Not applicable.

Insulation resistance: 5,000 megohms, minimum.

VSWR: 1.30:1, maximum .5 to 4 GHz.

RF leakage (total): Not applicable.

RF insertion loss: .25 dB, maximum, 3 GHz (.144 $\sqrt{F\ (GHz)}$ dB maximum tested at 3 GHz)

Durability: 500 cycles minimum at 12 cycles/minimum maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Dielectric withstanding: Test voltage: 1,500 Vrms, minimum (sea level).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

Contact resistance (milliohms, maximum).

Contact	Initial	After
Center	2.5	3.0
Outer	0.5	N/A
Outer (-70001)	1.0	N/A

Vibration, high frequency:

Interruptions: 1 μs, maximum.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, minimum.

Corona level:

Voltage: 375 V, minimum.

Altitude: 70,000 feet (4.437 kPa), minimum.

RF high potential withstanding voltage:

RF voltage: 1,000 Vrms. minimum.

Frequency: 5 MHz, minimum.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: 100 lb (444.82 N), minimum.

Part or Identifying Number (PIN): M55339/14-00306 or:

PIN: M55339/14-70001 **CAUTION: THIS PART HAS A NICKEL PLATED BODY AND IS NOT FOR USE IN APPLICATIONS WHERE PASSIVE INTERMODULATION GENERATION (PIM) MAY BE A CONCERN.**

TABLE I. Cross reference of PINs.

PIN	Superseded PIN or type designation 1/
M55339/14-00306	MS35368 UG-306B/U

1/ The superseded PIN or the type designation is for cross reference only. Where a superseded PIN or type designation is not given, none was assigned or will be assigned. PIN: M55339/14-00306 shall be used in all cases for marking and identifying the adapter.

Reference documents. In addition to MIL-PRF-55339, this document references the following:

MIL-STD-348

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revsion to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4657-013)

Review activities:
Army - AR, AT, MI
Navy - AS, MC
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.