MIL-A-44264
17 December 1986

MILITARY SPECIFICATION

ADAPTER KIT, M-1 CAP; FOR CANTEEN, WATER, INSULATED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers an adapter kit for modifying the insulated water canteen to accommodate the M-1 canteen cap.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

PPP-B-26	-	Bag, Plastic, (General Purpose)
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-L-35078 - Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-C-43103 - Canteen, Water, Plastic, with Screw Cap
MIL-C-51278 - Cap, Water Canteen, Field Chemical-Biological Mask, M-1

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

2-9-328 - Adapter, M-1 Cap
8-1-34 - Canteen, Water, Plastic Strap

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.1.2 Other Government documents. The following other Government documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on date of the solicitation.

JOINT COMMITTEE ON PRINTING (JCP) PUBLICATIONS

JCP-A-60 - Government Paper Specification Standards

(Copies may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issues of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.3).

3.2 Components. The adapter kit shall consist of the following components:

a.	Adapter, M-1, cap	1 each
b.	Cap, M-1	1 each
c.	Adhesive, epoxy, 2 grams	1 tube
d.	Razor blade, single edge	1 each
e.	Emery cloth, 2 by 4 inches	1 each
f.	Strap	1 each
g.	Alcohol packet	1 each
h.	Instruction sheet	1 each
i.	Plastic bag	1 each

3.3 Component characteristics (see 6.4).

3.3.1 Adapter, M-1 cap. The M-1 cap adapter shall conform to Drawing 2-9-328.

3.3.2 Cap, canteen, M-1. The M-1 canteen cap shall conform to MIL-C-51278.

3.3.3 Strap. The strap shall conform to the applicable requirements of MIL-C-43103 and Drawing 8-1-34.

3.3.4 Adhesive, epoxy. The epoxy adhesive shall be a two-part resin and hardener packet weighing approximately 2 grams and conforming to TRA-BOND BAFDA -2 or equal (see 6.5). The age of the adhesive packet and its contents shall be one month or less at the time of assembly of the adapter kit.

Source: https://assist.dla.mil -- Downloaded: 202640-22T01:03Z
Check the source to verify that this is the current version before use.

3.3.5 Blade, razor. The razor blade shall be a single edge safety type, industrial use, carbon steel with cutting edge protected.

3.3.6 Cloth, emery. The emery cloth shall be commercial grade, 80 grit, approximately 2 inches by 4 inches.

3.3.7 Packet, alcohol. The alcohol packet shall consist of a sealed container enclosing a pad saturated with 70-percent isopropl alcohol conforming to PDI Catalog No. B60301 or equal (see 6.6).

3.3.8 Instruction sheet. The instruction sheet shall conform to figure 1 in all respects. It shall be printed on white bond paper 8-1/2 inches by 11 inches conforming to JCP-A-60, 120 pound weight basis 25 by 38 inches per 1000 sheets. The instruction sheet shall be folded once in half lengthwise and twice from top to bottom with a finish size of 2-3/4 inches by 4-1/4 inches. The identification information in the upper left hand corner of the instruction shall be visible after folding.

3.3.9 Bag, plastic. The plastic bag shall conform to type II, style 1 of PPP-B-26. The film shall be natural and clear with a minimum thickness of 0.004 inch. Inside dimensions of the bag shall be approximately 5 inches by 8 inches.

3.4 Assembly of M-1 cap, adapter, and strap. The M-1 cap, adapter, and strap shall be assembled as follows:

a. Secure the strap to the cap with the large diameter hole of the strap firmly seated in the groove at the bottom of the cap.
b. Screw the cap on the adapter.
c. Position the free end of the strap over the end of the adapter and firmly seat it in the groove on the adapter.

3.5 Assembly of kit components in plastic bag. All components of the kit shall be arranged within the plastic bag. The bag shall be closed by heat-sealing. Prior to or during the heat-sealing closure operation, excess air within the bag shall be expelled.

3.6 Workmanship. The adapter kit shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 202610-22T01:03Z
Check the source to verify that this is the current version before use.

323: Department of the Navy. Commander, Naval Sea Systems Command, SEA 9

4.4.1.1 Certification. The contractor shall furnish a certificate of compliance for the requirement specified in 3.3.4 for the adhesive and in 3.3.7 for the alcohol packet.

4.4.2 Adapter dimensional examination.

4.4.2.1 Initial production examination of adapters. Two adapters shall be selected at random from the initial lot produced from each mold or die to be used in production. The two adapters shall be measured for all dimensions specified on Drawing 2-9-328. Any dimension not meeting the specified tolerance shall be considered a defect. The presence of one or more defects shall be cause for rejection of the adapter and the mold or die from which it was produced and for rejection of all adapters produced from that mold. The mold or die shall be reworked as necessary and another lot of adapters shall be produced and examined as above.

4.4.2.2 Subsequent production examination of adapters. Except when changes are made to the contractor's manufacturing process or the mold or die is changed, subsequent production lots of the adapter shall be dimensionally examined for the dimensions annotated with an asterisk on Drawing 2-9-328. Any dimension exceeding the applicable tolerance shall be considered a defect. The sample unit shall be one adapter. The inspection level shall be S-3 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0. If the contractor changes the manufacturing process or the mold or die, the initial production lot of the adapters involving the change shall be examined as specified in 4.4.2.1.

4.4.3 End item visual examination. The end item shall be examined for the defects listed in table I. The lot size shall be expressed in units of adapter kits. The sample unit shall be one adapter kit. The inspection level shall be I and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

NOTE: This examination shall be performed on adapter kits completely sealed within the plastic bag. After examination of the bag for closure the bag shall be opened and the contents examined.

TABLE I. End item visual defects

Examine	Defect
Plastic bag	Not natural clear film Not completely sealed Any hole, cut, or tear
General (as applicable to components)	Any component omitted or not as specified Any component defective

Source: https://assist.dla.mil -- Downloaded: 202610-22T01:03Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect
Adhesive	Any defect that may result in leakage of contents Any hole, cut, or tear in exterior foil enclosure
Razor blade	Cutting edge not protected
Alcohol packet	Any hole, cut, or tear in enclosure
Cap, adapter, and strap assembly	Not assembled as specified
Instruction sheet	Omitted, not legible, incomplete instructions, size of sheet not as specified, not folded as specified

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of container flap, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number per container is more or less than required.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A.

5.1.1 Level A. Five adapter kits, assembled as specified in 3.5, shall be unit packed in a paperboard box conforming to variety 1, style IV, type I or J, class i or style VIII, type G, class i of PPP-B-566. Approximate inside dimensions of the paperboard box shall be 12-1/2 inches in length, 5 inches in width, and 2-3/8 inches in depth.

5.2 Packing. Packing shall be level A, B, or Commercial (see 6.2).

5.2.1 Level A packing. One hundred and fifty adapter kits, preserved as specified in 5.1, shall be packed within a fiberboard container conforming to style RSC, grade V2s of PPP-B-636. Approximate inside dimensions of the shipping container shall be 25 inches in length, 15-1/2 inches in width, and 13 inches in depth. Approximate dimensions are furnished as a guide only. Paperboard boxes shall be arranged 10 in length, 3 in width and 1 in depth. Each container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. One hundred and fifty adapter kits, preserved as specified in 5.1, shall be packed within a fiberboard container conforming to style RSC, variety SW, grade 200 of PPP-B-636. Approximate inside dimensions of the shipping container shall be 25 inches in length, 15-1/2 inches in width, and 13 inches in depth. Approximate dimensions are furnished as a guide only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

Paperboard boxes shall be arranged 10 in length, 3 in width and 1 in depth. Each container shall be closed in accordance with method II, as specified in the appendix of the container specification except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. The adapter kits, as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), adapter kits, packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III or IV or MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.1 Special marking. Each unit pack and shipping container shall be marked in accordance with the applicable type I shelf-life item marking requirements specified in MIL-STD-129. The expiration date shall be 18 months after the date the kit is assembled.

6. NOTES

6.1 Intended use. The adapter kit is intended for modifying the insulated water canteen (MIL-C-40124) to accommodate the M-1 cap.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. When a first article is required (see 3.2, 4.3, and 6.3).
c. Selection of applicable levels of packing (see 5.2).
d. Type and class of unit load when unit loading is required (see 5.2.1).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.3).

6.5 Epoxy adhesive. Source of supply for the epoxy adhesive packet specified in 3.3.4 is TRA-CON, Inc., 55 North St., Medford, MA 02155.

6.6 Alcohol packet. Source of supply for the alcohol packet specified in 3.3.7 is Professional Disposables, Inc., Mt. Vernon, NY 10550-1890.

6.7 Subject term (key word) listing.

Adapter kit
Canteen
Cap

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Navy - MC
Air Force - 82
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

Project No. 8465-0938

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

1 EA M-1 CANTEEN CAP ADAPTER KIT FOR INSULATED CANTEEN

CONTENTS

1 EA	INSTRUCTION SHEET
1 EA	M-1 CAP
1 EA	STRAP
1 EA	ADAPTER (MOUTHPIECE)
1 EA	EPOXY, TUBE (ADHESIVE)
1 EA	RAZOR BLADE
1 EA	EMERY CLOTH
1 EA	ALCOHOL PACKET

WARNING DO NOT GET ADHESIVE IN EYES. AVOID CONTACT WITH SKIN. IF ADHESIVE CONTACTS EYES OR SKIN FLUSH WITH WATER FOR 15 MINUTES AND GET PROMPT MEDICAL ATTENTION FOR EYES.

INSTRUCTIONS

1 - Remove cord assembly, cap assembly and mouthpiece from canteen.
2 - Clean outside of canteen neck with emery cloth, and then wipe clean with the alcohol saturated pad that is supplied in the kit.
3 - Prepare adhesive by removing clamp on plastic packet and mixing the two-part solution by kneading (squeezing) the packet.
4 - Cut corner of adhesive packet with razor blade supplied and apply approximately one-half of the adhesive to the outer surface of the canteen neck for distance of one-half inch. (Using too much adhesive will cause it to run into the mouthpiece end of the adapter which is not desirable.)
5 - Assemble canteen to adapter as shown in View A with a rotating motion. Remove adapter to assure that entire surface of both the canteen neck and adapter is coated evenly with adhesive. If not, apply additional adhesive. This procedure is important to avoid leakage through bonding gap.
6 - Reassemble canteen and adapter and allow to dry for a minimum of 24 hours in inverted position as shown in View B.

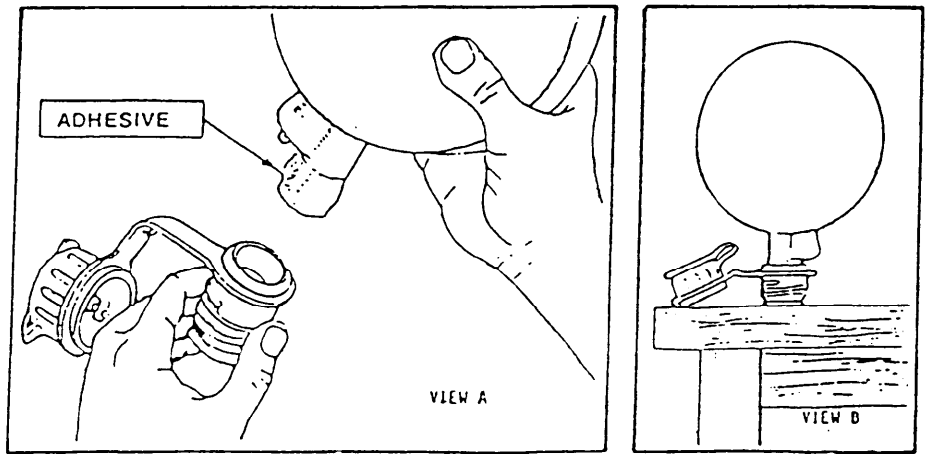


FIGURE - 1 ADAPTER KIT INSTRUCTION SHEET

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-44264	Adapter Kit, M-1, Cap; for Canteen, Water, Insulated

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP-1, Feb 86

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:03Z
Check the source to verify that this is the current version before use.

1. The yellow color shall be a commercial [illegible] inch high Arabic numera