MILITARY SPECIFICATION

SMOCK, MAN'S: HOSPITAL DUTY UNIFORM (HDU)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a man's smock made of twill weave, polyester/cotton cloth.

1.2 Classification. The smock shall be one type in the following sizes, as specified (see 6.2)

Schedule of sizes

X-short	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
Short	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
Regular	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
Long	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approval for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bags, Plastic
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43548	-	Thread, Polyester, Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-43624	-	Thread, Polyester, Spun
MIL-C-44270	-	Cloth, Polyester/Cotton, For Hospital Duty Uniform (HDU)

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

(Application for copies should be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Photo Standards

(Application for copies of the AATCC Manual should be addressed to the Executive Director, American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, Durham, NC 27709-2215.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case the document shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Materials (see 6.7).

3.3.1 Basic material. The basic material shall be white polyester-cotton cloth conforming to type II of MIL-C-44270.

3.3.2 Interlining fusible. The fusible material for interlining the collar shall be 100 percent polyester, thermal bonded nonwoven fusible with polyester dot adhesive system evenly applied to one side in accordance with good commercial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

Physical properties

Weight, oz/yd^2	1.7 - 2.2
Breaking strength, lbs.	
machine	3.0 (min)
cross-machine	2.0 (min)
Bonding strength, oz/in	
initial	32 (min) or split
after 10 launderings	24 (min) or split (shall not show any strike through, bubbling or delamination)

3.3.3 Thread. The thread for seaming, stitching and buttonholes shall be White AH, C.A. 66050, cotton-covered or polyester-covered polyester, ticket Nos. 50, 2 or 3 ply, and 70, 2 ply, conforming to MIL-T-43548. Spun polyester thread, ticket Nos. 50, 3 ply, and 70, 2 ply, conforming to MIL-T-43624 may be substituted for the cotton-covered polyester thread.

3.3.4 Labels. Each smock shall have an identification label and instruction label or a combination identification and instruction label, and a size label conforming to type VI of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.3.4.1 Identification label. The identification label shall conform to class 1.

3.3.4.2 Size label. The size label for the smock shall conform to class 2.

3.3.4.3 Instruction label. The instruction label shall conform to class 3. and shall contain the following information:

Washing Instructions

Machine Wash (close slide fastener)

Use "Permanent Press" cycle. Wash separately from colored garments using warm water (100°F) and mild laundry detergent. Use only 2/3 regular load. Use commercial fabric softener to whiten and prevent clinging. Tumble dry using "Permanent Press" cycle (do not overload) and remove immediately from dryer. If automatic dryer is not available, shape and hang to air dry. If needed, touch up any wrinkled areas with a cool-warm iron.

Hand Wash

Wash separately from colored garments in warm water using mild laundry detergent. Rinse thoroughly. Shape and hang to air dry.

DO NOT WRING OR STARCH
DO NOT REMOVE THIS LABEL
DO NOT USE LIQUID CHLORINE BLEACH

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.3.4.4 Combination identification and instruction label. The identification (class 1) and instruction (class 3) labels may be combined into one label and shall conform to class 15.

3.3.5 Buttons. The buttons shall be type II, class D, style 20/21, 20-line, conforming to V-B-871 and the color shall be white.

3.4 Design. The smock shall be coat length with short sleeves; yoked shoulders, six button closure, and notched lapel collar and shall have one breast pocket and two lower pockets.

3.5 Patterns. Standard patterns will be supplied by the Government. The standard patterns provide a seam allowance of 1/2 inch for safety stitch seams; 3/8 inch for setting collar and 1/4 inch for all other seams. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting contractor's working patterns. The working patterns shall be identical to the standard patterns. In the safety stitched construction, the 1/2 inch seam allowances shall be maintained even though the finished seam allowance may measure from 3/8 to 7/16 inch.

3.5.1 Pattern parts. The components of the smock shall be cut from the materials specified in table I in accordance with pattern parts indicated.

TABLE I. List of pattern parts

Material	Nomenclature	Parts
Basic material (3.3.1)	Left front	1
	Right front	1
	Back	1
	Yoke	1
	Sleeve	2
	Front facing	1
	Left front yoke	1
	Right front yoke	1
	Collar	2
	Breast pocket	1
	Bottom pocket	2
	Scissor pocket	1
	Insignia welt	1
	Tab	2
Interlining Fusible (3.3.2)	Collar Fusible	1

3.6 Seam appearance rating. After the finished smock has been washed and dried (see 4.4.4), the appearance rating of seams and stitching shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

Area	Minimum Rating, Average of 3 Observations
Side seam	3.0
Front yoke	3.0
Collar hem	3.0
Pockets	3.0
Front plackets	3.0
Back yoke	3.0
Sleeve hem	3.0
Bottom nem	3.0

3.7 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the document shall govern.

3.7.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams will occur (see 6.5). When two or more methods of seams or stitches are given for the same operation, any one may be used. Thread tension shall be maintained so that no tight or loose tension will result (see 6.5). Overedge stitching shall be 3/16 to 1/4 inch wide.

3.7.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/2 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.7.1.1.1 Repairs of type 301 stitching.

a. When thread breaks, skipped stitches, run-offs, or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Except for prestitching, thread breaks or two or more consecutive skipped or run-off stitches noted during inspection shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.7.1.2 Type 502, 503, 504, 515, 516, and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.7.1.1.1a and b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

3.7.1.3 Bartacks. Unless otherwise specified, all bartacks shall be 3/8 ± 1/16 inch long and 1/8 ± 1/32 inch wide, and shall contain 28 stitches. Bartacking shall be free from thread breaks and loose stitching.

3.7.1.4 Buttonholes. The buttonholes shall be straight cut, barred at both ends, with a finished cut length of 11/16 to 3/4 inch. The buttonholes shall be clean cut and correctly positioned with the stitching securely caught in the fabric. When a purl-type stitch is used, the purling shall be on the outside (as worn).

3.7.1.5 Automatic stitching. Automatic machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met and at least three or more tying, overlapping, or back stitches are used to secure the ends of the stitching.

3.7.1.6 Thread ends. All thread ends shall be trimmed to a length of not more than 1/4 inch unless otherwise specified.

3.8 Pressing. All pressing specified in table II shall be done with a heated pressing iron or machine (see 6.6).

3.9 Manufacturing operations requirements. The smock shall be manufactured in accordance with the operations specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible provided the thread is removed or does not show on the finished smock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut smock. a. Cut smock in strict accordance with patterns furnished which show directional lines, size, placement of pockets, breast pocket welts, and notches for proper assembly of all parts. Directional lines shall be placed in the warp direction. b. Cut basic material parts of smock out of one piece of material except scissor pockets which may be cut from ends.						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as classified in 4.4.2, are excluded and replaced with non-defective and properly shaded material.						
3.	Marking. Mark, ticket, or bundle all components to insure a uniform shade and size throughout the smock.						
4.	Hem pockets. a. Turn up bottom of scissors pocket with raw edge turned in and hem 1/16 to 1/8 inch from turned-in edge. The hem shall measure 3/4 ± 1/8 inch wide.	301	EFb-1	8-12	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Hem pockets. (cont'd)						
	b. Turn down top of scissors pocket with raw edge turned in and stitch 1/16 to 1/8 inch from turned-in edge. The hem shall measure 1/4 to 3/8 inch wide. Both top and bottom hems shall be turned to the inside of the finished pocket.	301	EFb-1	8-12	50	50	
	c. Overedge stitch top edges of breast pocket and bottom pockets.	503 or 504		6-8	70	70	
	d. Turn tops to the inside per marks on patterns and stitch along overedge stitching line forming top hems.	301	EFm-1	8-12	50	50	
5.	Make tabs.						
	a. With face sides together stitch sides and point of breast pocket tabs. Clip points and turn face side out.	301	SSe-2(a)	8-12	50	50	
	b. Edge stitch 1/32 to 1/16 inch from edge around sides and point.	301	SSe-2(b)	8-12	50	50	
	c. Make one buttonhole centered, parallel to sides, and at the beginning of point on each tab.	304	button-hole	46-52 per button-hole	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make insignia welts.						
	a. Fold insignia welt in half lengthwise, face side in, and stitch ends. Turn and work out edges and corners.	301	SSa-1	8-12	50	50	
	b. Overedge raw edges together.	503 or	SSa-1	6-8	70	70	
		504	SSa-1	6-8	70	70	
	or						
	c. Cut welt with clicker or die cutter, pre-crease ends 1/4 inch, fold welts in half face side out and overedge raw edges together.	503 or	SSa-1	6-8	70	70	
		504	SSa-1	6-8	70	70	
7.	Make collar.						
	a. Fuse interlining to the inside of top collar.						
	b. With face sides together and edges aligned stitch around collar. Trim points, clip corners and turn face side out, pushing out points.	301	SSa-1	8-12	50	50	
	c. Press collar smooth and flat.						
8.	Assemble fronts.						
	a. With face sides together, position the bottom of front yokes to the tops of fronts (right and left respectively) and seam together catching pocket tab, per marks on pattern on the left yoke seam.	515 or	SSa-2	8-12	50 (chain)	70	
		516 or					
		519			70 (overedge)	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Assemble fronts. (cont'd)						
	b. With seam turned towards yoke, top stitch 1/16 to 1/8 inch from edge of seam.	301	LSq-2	8-12	50	50	
	c. Position insignia welt per marks on pattern to right front with the overedged edge toward yoke seam and stitch in place.	301	LSbj-1	8-12	50	50	
	d. Turn welt up and stitch ends to front, 1/16 to 1/8 inch from edge.	301	LSbj-1	8-12	50	50	
	e. Position instruction label or combination label to the inside of left front inside pattern marks for pocket and stitch on all four sides 1/16 to 1/8 inch from edge.	301		8-12	50	50	
	f. Position scissor pocket to right front face sides up, per marks on patterns, fold under sides and stitch sides and bottoms.	301	LSd-1	8-12	50	50	
	g. Position bottom pockets to left and right fronts face sides up, per marks on patterns, and stitch front and bottoms.	301	LSd-1	8-12	50	50	
	h. Bartack top ends of pocket openings superimposed on pocket stitching.	Bartack		28 per tack	50	50	
	i. Position facing to left front face sides together and edges aligned and seam together.	301	SSa-1	8-12	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Assemble fronts. (cont'd)						
	j. With the face sides up, seam toward facing, and facing folded per marks on pattern, top-stitch 3/8 to 1/4 inch from facing fold.	301	LSq-2	8-12	50	50	
	k. Fold front facing under forming front edge, per marks on pattern and stitch 3/8 to 1/4 inch from edge.	301	LSd-1	8-12	50	50	
	l. Overedge stitch inside edge of right and left front facings.	502 or 503 or 504		6-8	70	70	
9.	Make backs.						
	a. Position bottom of yoke to top of back face sides together and seam together forming two back pleats per marks on patterns.	515 or 516 or 519	SSa-2	8-12	50 (chain) 70 (overedge)	70 70	
	b. With seam toward yoke, topstitch 1/16 to 1/8 inch from edge.	301	LSq-2	8-12	50	50	
	c. With face sides together, stitch pleats closed at one point per marks on patterns.	301	EFa-1	8-12	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Assemble smock.						
	a. With face sides together, seam fronts to backs at shoulder seams.	515 or 516 or 519	SSa-1	8-12	50 (chain) 70 (overedge)	70 70	
	b. With face sides together and all notches matching, stitch under collar to smock catching facing and size and identification labels (center back) in stitching.	301	SSa-1	8-12	50	50	
	c. Turn the top collar to the inside of smock, turn seam allowance under and stitch in place 1/16 to 1/8 inch from edge.	301	LScf-2	8-12	50	50	
	d. Top stitch around outer collar 3/8 to 1/4 inch from edge.	301	LSq-2	8-12	50	50	
	e. Position sleeves to smock (right and left, respectively), face sides together, notches matching, and seam.	515 or 516 or 519	SSa-1	8-12	50 (chain) 70 (overedge)	50 70	
	f. With face side together and seams matched, seam underarms and side seams together.	515 or 516 or 519	SSa-1	8-12	50 (chain) 70 (overedge)	70 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Hem sleeves and smock bottom.						
	a. Turn the bottom of sleeves to the inside 1 to 1-1/8 inch with raw edge turned under and stitch 1/16 to 1/8 inch from edge forming hem.	301	EFb-1	8-12	50	50	
	b. With facings smooth, flat and to the inside of the smock, turn the bottom of smock to the inside 1/2 to 5/8 inch with the raw edge turned in and stitch 1/16 to 1/8 inch from edge forming hem.	301	EFb-1	8-12	50	50	
12.	Buttons and Buttonholes.						
	Stitch six buttons to the right front and six buttonholes to the left front per marks on patterns. Smock front should lay smooth and flat when engaged.	Hand or 101 and 304 button-hole		3-4 double thread per button	50 or 70		
				46-52 per button-hole	50 or 70		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Clean, press, and prepare for packing. a. Trim all ends of threads and remove loose threads. b. Press smock smooth and flat using sufficient heat, steam and pressure to stabilize the seams and remove wrinkles, creases and puckers. When pressing lapels, roll the seams to underside of lapels so that the front will not be exposed along edge of lapels. Do not crease sleeves or break-line of lapels.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3 10 Finished measurements. The finished measurements shall conform to table III. The measurements shall be taken with the buttons engaged and the smock flat on a table.

TABLE III. Table of measurements in inches

Size	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
1/2 Chest 1/	19-1/2	20	20-1/2	21	21-1/2	22	22-1/2	23	23-1/2	24	24-1/2	25	25-1/2	26	26-1/2
Sleeve seam	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4	5-3/4
Back lengths 2/															
X-short	27-1/2	27-5/8	27-3/4	27-7/8	28	28-1/8	28-1/4	28-3/8	28-1/2	28-5/8	28-3/4	28-7/8	29	29-1/8	29-1/4
Short	29	29-1/8	29-1/4	29-3/8	29-1/2	29-5/8	29-3/4	29-7/8	30	30-1/8	30-1/4	30-3/8	30-1/2	30-5/8	30-3/4
Regular	30-1/2	30-5/8	30-3/4	30-7/8	31	31-1/8	31-1/4	31-3/8	31-1/2	31-5/8	31-3/4	31-7/8	32	32-1/8	32-1/4
Long	32	32-1/8	32-1/4	32-3/8	32-1/2	32-5/8	32-1/2	32-5/8	32-3/4	32-7/8	33	33-1/8	33-1/4	33-3/8	33-1/2

1/ With the smock buttoned, measure across the chest, at base of armhole, from folded edge to folded edge.

2/ Measure sleeve seam along underarm from sleeve setting seam to end of sleeve

3/ Measure back length down center of back from collar joining seam to a point in line with bottom of smock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. The finished smock shall conform to the quality of product established by this document.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

4.3 First article inspection. When a first article is required (see 3.1), it shall be examined for the defects specified in 4.4.4 and 4.4.3. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Certification. A certificate of compliance will be acceptable as evidence that the fusible material conforms to the requirements specified in 3.3.2.

4.4.2 End item visual examination. The end item shall be examined for the defects listed in below. The lot size shall be expressed in units of smocks. The sample unit shall be one smock. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15.0 for major and minor A combined defects, and 40.0 for total (major, minor A, and minor B combined) defects.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Pressing	Omitted (cloth wrinkled or creased, or seams not flat)		X	
	Sleeves, lapels, or pleats creased			X
	Front fold-lines and edge of lapels not creased			X
	Burned or scorched	X		
Material defects	Hole, cut, tear, smash, mend, exposed drill hole, open place, shade bar, multiple float, or loose slub:			
	1. On outside of smock	X		
	2. On inside of smock (longest dimension in any direction):			
	- up to 1/4 inch inclusive			X
	- more than 1/4 inch		X	
Shaded parts	Variation in shade within a part or between parts	X		
Cleanness	Spot or stain clearly noticeable:			
	1. On outside		X	
	2. On inside			X
	Five or more thread ends not trimmed, loose threads, or shade ticket not removed			X
	Basting or holding stitching visible on outside of smock			X
	Any marking visible on outside of smock		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE VI. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Component and assembly	Any component not as specified	X		
	Any component part or required operation omitted (unless otherwise classified herein)	X		
	Any operation not performed as specified (unless otherwise classified herein)	X		
Cutting	Any part not cut in conformance with warp directional lines indicated on patterns or not cut in accordance with specification requirements.	X		
Seams and stitching	Accuracy of seaming:			
	1. Any part of smock caught in an unrelated operation or stitching	X		
	2. Seam irregular, twisted, pleated, or wavy (unless otherwise classified herein)		X	
	3. Ends of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch (unless otherwise classified herein)			X
	4. Stitching overlapping end of thread-break less than 1/2 inch			X
	5. Ends of a continuous line of stitching overlapped less than 1/2 inch on all stitching except labels, or less than three stitches on labels			X
	6. Poor seam appearance, puckered, or pleated	X		

NOTE: Photographic standards for evaluating single needle seams are available from the by the American Association of Textile Chemists and Colorists (see 2.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE VI. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	Gage of stitching and seam allowances:			
	1. Irregular, i.e. unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when condition exists along major portion of seam)		X	
	2. Width not as specified or not within range of gage specified, or varies more than 1/16 inch when no range is specified			X
	Stitches broken or missing:			
	1. All stitching except buttonholes, and overedging:			
	- up to 1/4 inch (inclusive)			X
	- more than 1/4 inch but not more than 1/2 inch		X	
	- more than 1/2 inch	X		
	2. Front facing stitching:			
	- any	X		
	3. Overedging:			
	- more than 1 inch			X
	Skipped stitches (except on button holes) or runoffs:			
	- 1/4 up to 1/2 inch in length			X
	- over 1/2 inch		X	
	Raw edge more than 1/4 inch long on outside		X	
	Raw edge more than 1/2 inch on inside			X
	Seam and stitch type not as specified		X	
	Stitches per inch less than minimum or more than maximum specified (to be scored only when the condition exists for a distance of more than half the length of the seam):			
	- one stitch			X
	- two stitches		X	
	- three or more stitches	X		
	Stitch tension:			
	1. Loose tension resulting in loose seam	X		
	2. Loose tension (exposed loops of needle or bobbin thread)		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE VI. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	3. Tight tension (on 301 stitching, stitches break when strain is applied in direction of seam)	X		
	4. Loose tension on bartacks			X
	Seam not worked out to edge (when required) having a depth between folds of 1/16 inch or more			X
	Any seam not turned in the direction specified		X	
Labels	Size, identification, instruction or combination missing, incorrect, or illegible	X		
	Any label not stitched on all four sides when specified		X	
	Stitching through the printing of any label			X
	Any label not positioned as specified		X	
Buttonholes	1. Not positioned as specified			X
	2. Off center by more than 1/8 inch		X	
	3. Cut length less than 5/8 inch or more than 11/16 inch			X
	4. Any buttonhole omitted, or one or more added			X
	5. Not as specified type of buttonhole		X	
	6. Ragged edges, incomplete stitching, or uncut buttonhole		X	
	7. Buttonhole stitching not securely caught in fabric (stitching can be pulled away from fabric)		X	
	8. One or more broken or more than two continuous skipped stitches in buttonhole		X	
	9. Tack (bar) on one or both ends of buttonhole omitted or insecure		X	
	10. Purling on buttonhole on underside (when purl-type)			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE VI. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Collar	Undercollar exposed at collar end by more than 1/16 inch			X
	Twisted or tight, causing edges to curl up		X	
	Edges irregular			X
	Ends poorly shaped or not uniform in length or shape			X
	Points not worked out		X	
	Uneven in width by more than 1/8 inch		X	
Sleeves	Armhole seam staggered more than 1/8 inch at underarm joining-seam		X	
	Armhole stretched or tight causing pleats on sleeve or body of smock	X		
	Armhole seam irregular			X
Fronts	Shoulder edge of facing not stitched to shoulder seam allowance of smock or not smooth and flat			X
	Pockets:			
	1. Opening stretched (not smooth and flat)		X	
	2. Openings unequally spaced from side seam by more than 1/4 inch		X	
	3. Right and left pocket openings not uniform		X	
	4. Top or bottom hem of scissor pocket less or more than specified			X
	5. Part of scissor pocket or label stitching visible on outside of smock	X		
	Front exposed on outside of turned-back lapel by more than 1/16 inch		X	
	Collar end and front edge of smock uneven by more than 1/16 inch		X	
Backs	One or more pleat not as specified or missing	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

4.4.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance and sleeves uneven in length by more than 3/8 inch shall be classified as defects. The lot size shall be expressed in units of smocks. The sample unit shall be one smock. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 End item seam examination. Samples submitted for examination shall be evaluated initially and after one laundering cycle following the label washing instructions. Touch-up with a warm iron prior to evaluation is permitted. Evaluation shall be done by three trained observers working independently of each other. Test samples should be placed on a lighted viewing board (See AATCC TM 124) in such a manner than they lie flat on the surface of the board. The photographic standard for single needle seams shall also be placed on the viewing board. The observers shall stand directly in front but 4 feet from the test items. The observers shall then compare the test items to the photographic standard in each of the areas specified below and assign a rating to each area. The rating value assigned to an area by the observer shall be the numerical value of the photographic standard that most nearly matches the area. Seams appearing to fall between the numerical values of the photographic standard may be rated 2.5, 3.5, or 4.5. Rating values assigned by each of the observers shall be recorded. The average of the rating values assigned by each observer to the same area shall be the rating value for that area. If a range of 1.5 or more is noted between the highest and lowest value ratings of the 3 trained observers, then the evaluation for that area of observation should be discarded and be repeated by 3 new trained observers, if possible. One or more seams listed in 3.5 not meeting the minimum appearance rating shall be considered a defect.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, inadequate stapling, or loose strapping. Open and noncontinuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship (cont'd)	Alternative to heat sealed closure polyethylene bag not provided with tuck or reverse flap. Incorrectly fabricated bag. Voids in shipping container not filled as specified. Bulged or distorted container.
Content	Number of smocks per shipping container is more or less than required. 1/ Size shown on one or more smocks not as specified on shipping container. 1/

1/ For this defect, one shipping container in the sample shall be examined.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each smock with fastener closed shall be neatly folded to approximate dimensions of 14 inches in length by 11-1/2 inches in width. Each folded smock shall be placed in a snug-fitting plastic bag conforming to A-A-50083.

5.1.2 Commercial. Smocks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Twenty-four smocks of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed and reinforced in accordance with method III of the appendix of PPP-B-636. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Twenty-four smocks of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the fiberboard container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.3 Commercial. Smocks unit packed as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), smocks packed as specified in 5.2.2 and 5.2.3, shall be palletized in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any marking required by the contract or purchase order, unit packs, shipping containers and unitized pallet loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951.

5.4.1 Plastic bagged unit packs. Plastic bagged unit packs shall have the required identification information legibly printed or stamped in black, directly on the bag across the center face or on a white paper label inserted within the bag, so as to permit ready identification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

5.4.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED NSN's" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The smock is intended for wear as a hospital duty or food handler uniform by male personnel of the Department of Defense.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size required (see 1.2).
c. When a first article is required (see 3.2, 4.3, and 6.4).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 Samples and shade samples. For access to sample of the end item, and shade samples address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Suggested sewing techniques. Experience has shown that if the following precautions are observed in using proper components and setting up the sewing machines, seam puckering will be held to an acceptable minimum level.

(a) The needles used for all seams should be as fine as possible consistent with the size or diameter of the thread used.
(b) The throat plate hole should be no larger than necessary to permit free entry of the needle and to prevent flagging.
(c) The finest feed, approximately 18 teeth per inch, possible should be used with a presser foot to exactly match the shape and size of the feed. The face of the presser foot (underside next to the feed on the machine) should be highly polished to eliminate roughness and reduce drag. Diamond shaped feed teeth have been used quite successfully.
(d) The lightest presser foot pressure should be used to prevent stretching of the top ply of material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

(e) In the safety stitch machine for stitch types 515, 516, and 519, the upper and lower trimming knives should be kept at peak sharpness to prevent "dragging" of the edge of the fabric.

(f) On stitch type 301 sewing, the bobbin tension should be adjusted so that when a full bobbin is placed in the bobbin case and threaded through the tension spring, the bobbin and case will ride slowly down the thread when the free end of the thread is held in the vertical position. Needle tension should be adjusted after the bobbin tension to provide slightly more needle thread than bobbin thread in the stitch.

(g) Thread takeup mechanism should be set on all machines to relieve as much tension as possible when forming the stitch. All thread contacts should be well polished and free of burrs, cuts and rough spots.

6.6 Pressing. A properly sized form finisher is recommended for the final pressing. To attain the quality of garment established by section 4 and to facilitate the manufacturing process, under-pressing is recommended.

6.7 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.8 Subject term (key word) listing.

Hospital
Man's
Smock

Custodians:

Army - GL
Air Force - 11

Review activities:

Army - MD
Air Force - 82-99
DLA - CT

Preparing activity:

Army - GL

Project No. 8405-0033

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

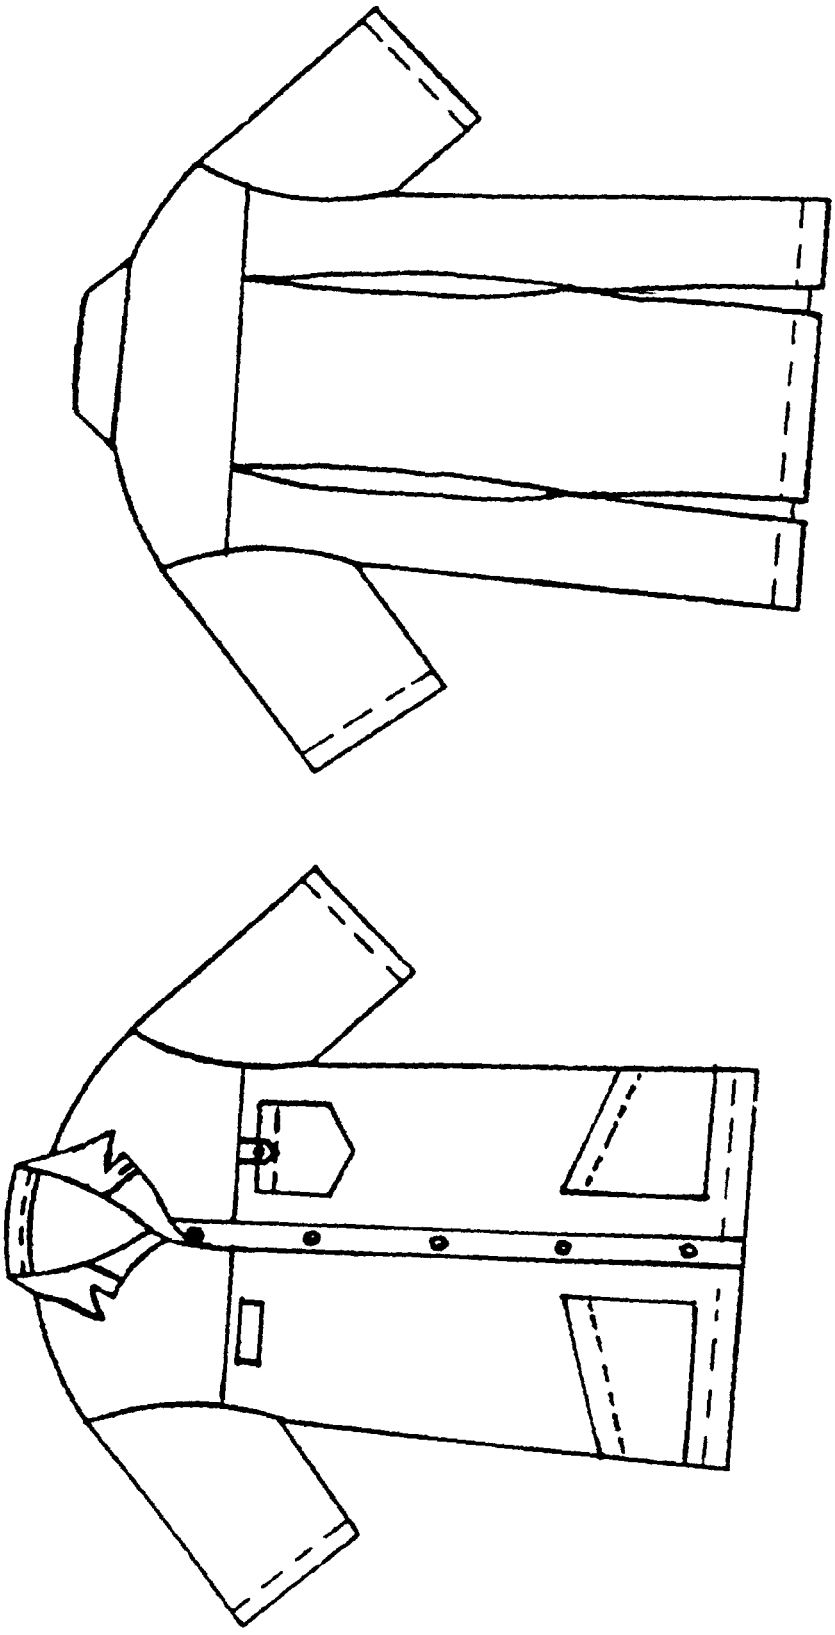


FIGURE 1. SMOCK, MAN'S (HDU)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U S ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-S-44290	Smock, Man's Hospital Duty Uniform (HDU)

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

NATICK/OP-1, Feb 86

Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.