INCH-POUND

MIL-S-44292A
30 March 1990
SUPERSEDING
MIL-S-44292
30 June 1987

MILITARY SPECIFICATION

SLACKS, WOMAN'S, HOSPITAL DUTY UNIFORM (HDU)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers woman's slacks made of twill weave, polyester/cotton cloth.

1.2 Classification. The slacks shall be of one type in the following sizes, as specified (see 6.2):

Schedule of sizes

X-short	6	8	10	12	14	16	18	20		
Short	6	8	10	12	14	16	18	20	22	
Regular	6	8	10	12	14	16	18	20	22	24
Long		8	10	12	14	16	18	20	22	
X-long			10	12	14	16	18	20		

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bag, Plastic, Folded Garment
V-F-106	-	Fastener, Slide, Interlocking
JJ-W-155	-	Webbing, Textile, (Cotton, Elastic)
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43548	-	Thread, Polyester, Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-43624	-	Thread, Polyester, Spun
MIL-C-44270	-	Cloth, Polyester/Cotton, For Hospital Duty Uniform (HDU)

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

Department of Defense Standard Shades Color Card for Sewing Threads

(Color cards may be available from the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Method 88B - Appearance of seams in durable press items after repeated home laundering

Method 124 - Appearance of durable press fabrics after repeated home lauderings

(Application for copies should be addressed to the Executive Director, American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, Durham, NC 27709-2215.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3), in accordance with 4.3.

3.2 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

3.3 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be white polyester-cotton cloth conforming to type III of MIL-C-44270.

3.3.2 Thread. The thread for seaming, stitching, and buttonholes shall be White AH, C.A. 66050, cotton-covered, or polyester-coated polyester, ticket Nos. 50, 2 or 3 ply, and 70, 2 ply, conforming to MIL-T-43548. Spun polyester thread, ticket Nos. 50, 3 ply, and 70, 2 ply, conforming to MIL-T-43624 may be substituted for the cotton-covered polyester thread.

3.3.3 Labels. Each of the slacks shall have an identification label and instruction label, or a combination identification and instruction label, and size label conforming to type VI of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.3.3.1 Identification label. The identification label shall conform to class 1.

3.3.3.2 Size label. The size label for the slacks shall conform to class 2, and shall include both the adjective (designating length) and numeric size.

3.3.3.3 Instruction label. The instruction label shall conform to class 3 and shall contain the following information:

Washing Instructions

Machine Wash (close slide fastener)
Use "Permanent Press" cycle. Wash separately from colored garments using warm water (100°F) and mild laundry detergent. Use only 2/3 regular load. Use commercial fabric softener to whiten and prevent clinging. Tumble dry using "Permanent Press" cycle (do not overload) and remove immediately from dryer. If automatic dryer is not available, shape and hang to air dry. If needed, touch up any wrinkled areas with a cool-warm iron.

Hand Wash
Wash separately from colored garments in warm water using mild laundry detergent. Rinse thoroughly. Shape and hang to air dry.

DO NOT WRING OR STARCH
DO NOT REMOVE THIS LABEL
DO NOT USE LIQUID CHLORINE BLEACH

3.3.3.4 Combination identification and instruction label. The identification (class 1) and instruction (class 3) labels may be combined into one label and shall conform to class 15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

3.3.4 Slide fastener. The slide fastener shall be polyester continuous monofilament (spiral or serpentine) type I, style 3, size M with 9/16 ± 1/32 inch wide tape in accordance with V-F-106 requirements. The length shall be 5-1/2 inches for all sizes. The color of the tape shall be white with matching chain, slider, pull, and stops. Also, continuous chain application may be used in lieu of preassembled fasteners, provided bottom and top stops are applied. Top stops may be securely sewn using either bartack or double-sewn stitching over fastener type turn-in.

3.3.5 Snap fasteners. The snap fasteners for the front opening shall conform to style 2A, finish 4 of MIL-F-10884, except the cap surface shall be coated with white enamel.

3.3.6 Elastic webbing. The elastic webbing for the waistband shall be type I, class 22, natural conforming to JJ-W-155.

3.4 Design. The slacks are straight leg, fly front design with an elasticized waist.

3.5 Patterns. Standard patterns will be supplied by the Government. The standard patterns provide a seam allowance of 1/2 inch for safety stitch seams. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting contractor's working patterns. The working patterns shall be identical to the standard patterns. In the safety stitched construction, the 1/2 inch seam allowances shall be maintained even though the finished seam allowance may measure from 3/8 to 7/16 inch.

3.5.1 Pattern parts. The components of the slacks shall be cut from the materials specified in table I in accordance with pattern parts indicated.

TABLE I. List of pattern parts

Material	Nomenclature	Parts
Basic material (3.3.1)	Front	2
	Back	2

3.6 Seam appearance rating. After the finished slack has been washed and dried (see 4.4.4), the appearance rating of the seams and stitching shall be as follows:

Area	Minimum Rating, Average of 3 Observations
Inseam	3.5
Outseam	3.5
Seat seam	3.5
Fly seam	3.5
Bottom hem	3.5
Front crease retention	3.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

3.7 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the document shall govern.

3.7.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams will occur (see 6.5). When two or more methods of seams or stitches are given for the same operation, any one may be used. Overedge stitching shall be 3/16 to 1/4 inch wide. Thread tension shall be maintained so that no tight or loose tension will result (see 6.5).

3.7.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.7.1.1.1 Repairs of type 301 stitching.

a. When thread breaks skipped stitches, run-offs, or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch behind the end of the stitching. 1/

b. Except for prestitching, thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch before the defective area and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.7.1.2 Type 314, 502, 503, 504, 515, 516, and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.7.1.1.1a and 3.7.1.1.1b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

3.7.1.3 Bartacking. Unless otherwise specified, bartacks shall be 3/8 ± 1/16 inch long and 1/8 ± 1/32 inch wide, and shall contain 28 stitches. Bartacks shall be free from thread breaks and loose stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

3.7.1.4 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met, and at least three or more tying, overlapping, or back stitches are used to secure the ends of stitching.

3.7.1.5 Thread ends. All thread ends that are visible on the finished item shall be trimmed to a length of not more than 1/4 inch unless otherwise specified.

3.8 Pressing. All pressing specified in table II shall be done with a heated pressing iron or machine.

3.9 Manufacturing operations requirements. The slacks shall be made by and with the use of all operations listed in table II. Unless otherwise specified in table II, the contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished slacks.

3.10 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government finished shaper pattern is forwarded, the component shall conform to that pattern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

TABLE II.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut slacks. a. Cut the slacks in strict accordance with patterns furnished which show directional lines, size, and proper assembly of all parts. Cut all parts from one piece of material. b. Cut elastic webbing for waistbands to meet requirements in table III. Size Length						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as classified in 4.4.2 are excluded and replaced with non-defective and properly shaded material.						
3.	Marking. Mark, ticket, or bundle all component parts to insure uniform shade and size throughout the slacks. Any method of marking may be used except: a. corrosive metal fastening devices b. sew-on type marking c. adhesive type tickets which leave an impression or traces of paper or adhesive upon removal of ticket.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Join side seams and inseams.						
	With face sides together, safety-stitch fronts to backs at side seams and inseams. Catch all labels, one over another, in right side seam approximately 4 inches down from top of slacks.	515 or 516 or 519	SSa-2	8-10	50 (chain) 70 (overedge)	70 70	
5.	Overedge stitching.						
	Overedge stitch around left and right fly extensions and around leg bottoms.	502 or 503 or 504		8-10	70	70	
6.	Attach slide fastener.						
	a. Position left slide fastener tape to left fly, face sides up, per marks on patterns and stitch 1/4 to 5/16 inch from chain with a second row of stitching 3/16 to 1/4 inch from first.	301		8-10	50	50	
	b. With face sides together stitch crotch seam from slide fastener stop, along right fly fold line to inseams.	301	SSa-1	8-10	50	50	
	c. Position right slide fastener tape to right fly extension, face sides together, per marks on patterns and stitch 1/4 to 5/16 inch from chain.	301		8-10	50	50	
	d. Turn fly extension and slide fastener to the inside of slacks. Beginning at the top of slacks, stitch 1/4 to 5/16 inch from the first row of slide fastener stitching (through all plies) and continue across the bottom of slide fastener tape to front seam.	301		8-10	50	50	

Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Attach slide fastener. (cont'd)						
	e. Bartack the end of the second row slide fastener stitching.	Bartack		28	50		
7.	Join seat and front seam.						
	With face sides together, safety-stitch back and front seams together in one continuous row of stitching, matching inseams and up bottom of fly extension.	515 or 516 or 519	SSa-2	8-10	50 (chain) 70 (overedge)	70 70	
8.	Form waistband.						
	a. Position elastic webbing to the inside top edge of slacks per marks on patterns and safety-stitch in place.	515 or 516 or 519	SSa-2	8-10	50 (chain) 70 (overedge)	70 70	
	b. Stitch ends of elastic webbing in place.	301	SSa-1	8-10	50	50	
	c. Turn the elastic webbing to the inside of slacks 1-3/8 to 1-5/8 inches forming waistband and stitch the end of the left fly extension closed and continue stitching around waistband 3/16 to 1/4 inch from overedge stitching edge.	301	EFa-1	8-10	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Set snap fastener. Set the stud to the right and the socket to the left front waistband per marks on patterns making sure snap fastener is centered and properly aligned.						
10.	Hem slacks. Turn the bottom of legs to the inside 2-3/8 to 2-5/8 and stitch forming hem.	314	EFa-1	6-8	50	50	
11.	Clean slacks. a. Trim and remove all ends of stitching and loose threads. b. Remove all spots and stains. c. Remove all shade and size tickets.						
12.	Pressing. The legs shall be pressed smooth and creased in the center with the seams matching at bottom and in crotch; or the inseams in the crotch may be slightly back of the outseam.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

3.11 Finished measurements. The finished measurements shall conform to table III. The measurements shall be taken with the slide fastener closed and the slacks flat on a table.

TABLE III. Measurements in inches

Size	6	8	10	12	14	16	18	20	22	24	Tolerance
(Relaxed) 1/											
1/2 Waist	11-3/4	12-1/4	12-3/4	13-1/2	14-1/4	15	15-3/4	16-3/4	17-3/4	18-3/4	± 1/2
(Expanded) 2/											
1/2 Waist	15-1/4	15-3/4	16-1/4	17	17-3/4	18-1/2	19-1/4	20-1/4	21-1/4	22-1/4	± 1/2
1/2 hip 3/	18-1/2	19	19-1/2	20-1/4	21	21-3/4	22-3/4	23-3/4	24-3/4	25-3/4	± 1/2

Inseam 4/	X-short	Short	Regular	Long	X-long	Tolerance
	23	25-1/2	28-1/2	31	33-1/2	± 1/4

1/ With slide fastener closed and waistband in relaxed position, measure from folded edge to folded edge at center of waistband.

2/ With slide fastener closed and waistband in stretched position, measure from folded edge to folded edge at center of waistband.

3/ At point 8 inches down from top of waistband, measure from folded edge to folded edge.

4/ Measure from crotch seam along inseam to bottom of slacks.

3.12 Workmanship. The finished slacks shall conform to the quality of product established by this specification and the occurance of defects shall not exceed the applicable acceptable quality levels (AQL).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2, 4.4.3, and 4.4.4.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of slacks. The sample unit shall be one of the slacks. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15 for major and minor A combined defects, and 40 for total (major, minor A, and minor B combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor A	Minor B
Pressing	Omitted (cloth wrinkled or creased or seams not flat)		201	
	Burned or scorched		202	
Material defects	Hole, cut, tear, smash, mend, exposed drill hole, open place, shade bar, multiple float, or loose slub:			
	1. On outside of slacks	101		
	2. On inside of slacks (longest dimension in any direction):			
	-up to 1/4 inch inclusive		203	
	-more than 1/4 inch	102		
Shaded parts	Variation in shade within a part or between parts	103		
Cleanness	Spot or stain clearly noticeable:			
	1. On outside		204	
	2. On inside			301
	Five or more thread ends not trimmed, loose threads, or shade ticket not removed			302
	Any marking visible on outside of slacks		205	
Component and assembly	Any component not as specified	104		
	Any component part or required operation omitted (unless otherwise classified herein)	105		
	Any operation not performed as specified (unless otherwise classified herein)	106		
Cutting	Any part not cut in conformance with warp directional lines indicated on patterns or not cut in accordance with specification requirements.	107		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching	Accuracy of seaming:			
	1. Any part of slacks caught in an unrelated operation or stitching	108		
	2. Seam irregular, twisted, pleated, or wavy (unless otherwise classified herein)		206	
	3. Ends of stitching, when not caught in other seams or stitching, backtacked less than 1/2 inch (unless otherwise classified herein)			303
	4. Stitching overlapping end of thread-break less than 1/2 inch			304
	5. Ends of a continuous line of stitching overlapped less than 1/2 inch on all stitching except labels, or less than three stitches on labels		207	
	6. Poor seam appearance, puckered, or pleated	109		
NOTE: Photographic standards for evaluating single needle stitching are available from American Association of Textile Chemists and Colorists (see 2.2).				
	Gage of stitching and seam allowances:			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when condition exists along major portion of seam)		208	
	2. Width not as specified or not within range of gage specified, or varies more than 1/16 inch when no range is specified			305
	Stitches broken or missing:			
	1. All stitching except front fly, slide fastener, and overedging:			
	- up to 1/4 inch (inclusive)			306
	- more than 1/4 inch		209	
	2. Front fly or slide fastener stitching:			
	- any	110		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)	3. Overedging: -more than 1 inch			307
	Skipped stitches or runoffs: - 1/4 up to 1/2 inch in length			308
	- over 1/2 inch		210	
	Raw edge more than 1/4 inch long on outside	111		
	Raw edge more than 1/2 inch on inside			309
	Seam and stitch type not as specified	112		
	Stitches per inch less than minimum or more than maximum specified (to be scored only when the condition exists for a distance of more than half the length of the seam): - one stitch			310
	- two stitches		211	
	- three or more stitches	113		
	Stitch tension: 1. Loose tension resulting in loose seam	114		
	2. Loose tension (exposed loops of needle or bobbin thread)		212	
	3. Tight tension (on 301 stitching, stitches break when strain is applied in direction of seam)	115		
	4. Loose tension on bartacks			311
Labels	Size identification, instruction or combination (if applicable) missing, incorrect, or illegible	116		
	Stitching through the printing of any label			312
	Any label not positioned as specified		213	
Snap fastener	Snap fastener broken (not functional) missing or loose	117		
	Stud and socket nor aligned causing distortion when engaged		214	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Slide fastener	Slide fastener defective affecting function	118		
	Slide fastener tape stretched or fabric stretched causing fullness, puckers, or pleats			313
	Position of slide fastener not as specified		215	
Slacks	Waistband less than 1-3/8 inch or more than 1-1/2 inch		216	
	Ends of inseams staggered by more than 1/4 inch		217	
	Front and seat seam not joined in one continuous operation		218	
	Leg bottoms not as specified		219	
	Hem width less than 2-3/8 or more than 2-1/2 inches		220	

4.4.3 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified in table III. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of slacks. The sample unit shall be one of the slacks. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 End item seam examination. Samples submitted for examination shall be evaluated initially and after one laundering cycle following the label washing instructions. Evaluation shall be done by three trained observers working independently of each other. Test samples should be placed on a lighted viewing board (see AATCC TM 124) in such a manner that they lie flat on the surface of the board. The photographic standard for single needle seams shall also be placed on the viewing board. The observers shall stand directly in front but 4 feet from the test items. The observers shall then compare the test items to the photographic standard in each of the areas specified below and assign a rating to each area. The rating value assigned to an area by the observer shall be the numerical value of the photographic standard that most nearly matches the area. Seams appearing to fall between the numerical values of the photographic standard (see AATCC TM 88B) may be rated 2.5, 3.5, or 4.5. Rating values assigned by each of the observers shall be recorded. The average of the rating values assigned by each observer to

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

the same area shall be the rating value for that area. If a range of 1.5 or more is noted between the highest and lowest value ratings of the three trained observers, then the evaluation for that area of observation should be discarded and be repeated by three new trained observers, if possible. One or more seams listed in 3.6 not meeting the minimum appearance rating shall be considered a defect. Two or more seams listed in 3.6 not meeting the minimum appearance rating on a sample unit shall be a defect. Any defective sample unit shall reject the lot. The sample unit shall be one of the slacks. The sample size shall be as follows:

Lot size	Sample size (sample unit)
800 or less	2
801 up to 22,000	3
22,001 and over	5

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping or inadequate stapling Bulged or distorted container
Content	Number per container is more or less than required

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed i units of palletized unit loads. The sample unit shall be one palletized unit load fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

Examine	Defect
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each pair of slacks with slide fastener closed, shall be neatly folded to approximate dimensions of 14 inches in length by 11-1/2 inches in width. Each folded pair of slacks shall be placed in a snug-fitting plastic bag conforming to A-A-50083.

5.1.2 Commercial preservation. Slacks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial.

5.2.1 Level A packing. Twenty-four pairs of slacks of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed and reinforced in accordance with method III of the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Twenty-four pairs of slacks of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 15 inches in depth. Approximate

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II, as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), shipping containers shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Slacks, unit packed as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), slacks packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and unitized pallet loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951 as applicable.

5.4.1 Plastic bagged unit packs. Plastic bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1. Intended use. The slacks are worn as a hospital duty or food handler uniform by female personnel of the Department of Defense.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples and shade samples. For access to samples of the end item and shade samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Suggested sewing techniques.

a. The needles used for all seams should be as fine as possible consistent with the size or diameter of the thread used.

b. The throat plate hole should be no larger than necessary to permit free entry of the needle and to prevent flagging.

c. The finest feed, approximately 18 teeth per inch, possible should be used with a presser foot to exactly match the shape and size of the feed. The face of the presser foot (underside next to the feed on the machine) should be highly polished to eliminate roughness and reduce drag. Diamond shaped feed teeth have been used quite successfully.

d. The lightest presser foot pressure should be used to prevent stretching of the top ply of material.

e. In the safety stitch machine for stitch types 515, 516, and 519, the upper and lower trimming knives should be kept at peak sharpness to prevent "dragging" of the edge of the fabric.

f. On stitch type 301 sewing, the bobbin tension should be adjusted so that when a full bobbin is placed in the bobbin case and threaded through the tension spring, the bobbin and case will ride slowly down the thread when the free end of the thread is held in the vertical position. Needle tension should be adjusted after the bobbin tension to provide slightly more needle thread than bobbin thread in the stitch.

g. Thread takeup mechanism should be set on all machines to relieve as much tension as possible when forming the stitch. All thread contacts should be well polished and free of burrs, cuts, and rough spots.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key word) listing.

Apparel
Outerwear, women's

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Air Force - 11

Review activities:


Army - MD
Air Force - 82, 99
DLA - CT

Preparing activity:


Army - GL

(Project 8410-0719)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

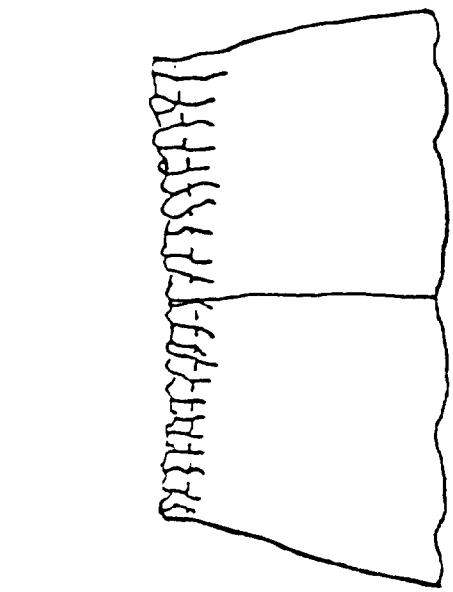

BACK

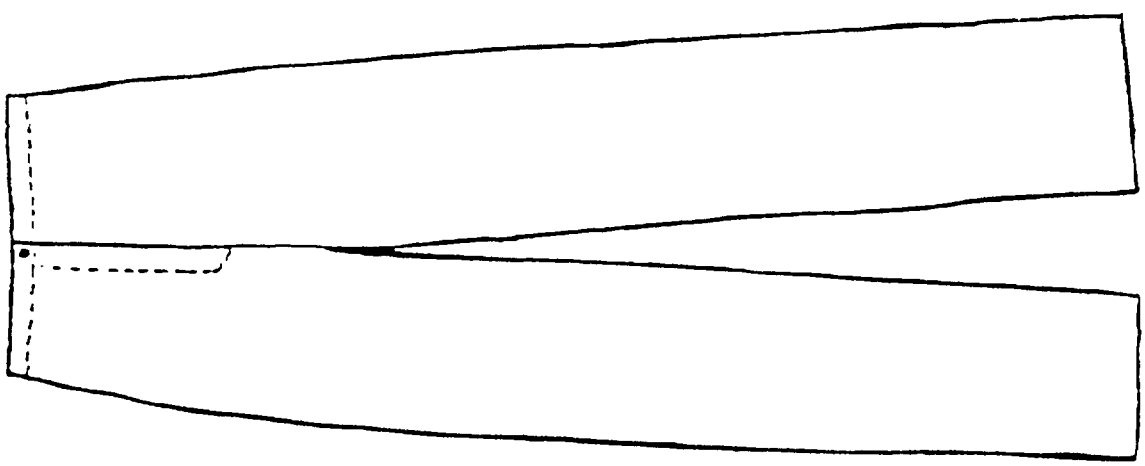

FRONT

FIGURE 1. SLACKS, WOMAN'S: (HDU)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-44292A	90/03/30

3. DOCUMENT TITLE
SLACKS, WOMAN'S, HOSPITAL DUTY UNIFORM (HDU)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

7. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
U.S. Army Natick RD&E Center	508-651-5221	256-5221
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-ES Natick, MA 01760-5014	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:15Z
Check the source to verify that this is the current version before use.