MILITARY SPECIFICATION

# TROUSERS, MAN'S: HOSPITAL DUTY UNIFORM (HDU)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This document covers trousers made of twill weave, polyester/cotton cloth.

1.2 Classification. The trousers shall be of one type in the following sizes, as specified (see 6.2):

Schedule of sizes

| Extra short | Short | Regular | Long | Extra long |
|---|---|---|---|---|
| | | 28 | 28 | |
| | | 29 | 29 | |
| 30 | 30 | 30 | 30 | 30 |
| 31 | 31 | 31 | 31 | 31 |
| 32 | 32 | 32 | 32 | 32 |
| 33 | 33 | 33 | 33 | 33 |
| 34 | 34 | 34 | 34 | 34 |
| 35 | 35 | 35 | 35 | 35 |
| 36 | 36 | 36 | 36 | 36 |
| 37 | 37 | 37 | 37 | 37 |
| 38 | 38 | 38 | 38 | 38 |
| 39 | 39 | 39 | 39 | 39 |
| 40 | 40 | 40 | 40 | 40 |
| 41 | 41 | 41 | 41 | 41 |
| 42 | 42 | 42 | 42 | 42 |
| 43 | 43 | 43 | 43 | 43 |
| 44 | 44 | 44 | 44 | 44 |
| 45 | 45 | 45 | 45 | 45 |

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

Schedule of sizes (continued)

| Extra short | Short | Regular | Long | Extra long |
|---|---|---|---|---|
| 46 | 46 | 46 | 46 | 46 |
| 47 | 47 | 47 | 47 | 47 |
| 48 | 48 | 48 | 48 | 48 |

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specification and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-50083 - Bags, Plastic, Folded Garment
V-B-871 - Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106 - Fasteners, Slide, Interlocking
V-T-276 - Thread, Cotton
V-T-280 - Thread, Gimp, Cotton, Buttonhole
CCC-C-438 - Cloth, Buckram, Woven and Nonwoven
DDD-L-20 - Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078 - Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-T-43548 - Thread, Polyester, Core: Cotton-, Rayon-, or Polyester-Covered
MIL-T-43624 - Thread, Polyester, Spun
MIL-C-43718 - Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon
MIL-C-44270 - Cloth, Polyester/Cotton, For Use in Hospital Duty Uniform (HDU)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets
MIL-STD-1488 - Provisions for Evaluating Quality of Trousers

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity).

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

Department of Defense Standard Shades for Buttons

(Application for copies should be addressed to the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Photo Standards

(Application for copies of the AATCC Manual should be addressed to the Executive Director, American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, Durham, NC 27709.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Materials (see 6.6).

3.3.1 Basic material. The basic material shall be white polyester-cotton cloth conforming to type III of MIL-C-44270.

3.3.2 Lining material. The material for left fly interlining, right fly lining, waistband lining and crotch pieces, shall be polyester, polyester and cotton, or polyester and rayon cloth conforming to class 1 of MIL-C-43718. The color of the lining shall be white.

3.3.3 Waistband interlining. The material for the waistband interlining shall be bleached or unbleached buckram conforming to type II, class 1 of CCC-C-438, except shrinkage in the warp and filling directions shall not exceed 2.0 percent maximum. As an option, nonwoven cloth, natural color, conforming to type IV, class 1 of CCC-C-438 may be used as an alternative for the waistband interlining.

3.3.4 Thread. The thread for seaming, stitching and buttonholes shall be White AH, C.A. 66050, cotton- or polyester-covered, ticket Nos. 50, 2 or 3 ply, and 70, 2 ply, conforming to MIL-T-43548. Spun polyester thread, ticket Nos. 50, 3 ply, and 70, 2 ply, conforming to MIL-T-43624 may be substituted for the cotton-covered polyester thread.

3.3.4.1 Machine thread. The thread for automatic machine pocket construction may be type IC2, Ticket No. A, 3-ply of V-T-276.

3.3.4.2 Automatic button sewing. If an automatic machine which sews and shanks (wraps) the buttons in one operation is used, the thread shall be waxed nylon monocord special No. 5, having a minimum breaking strength of 16 pounds and a minimum length per unit weight of 2150 yards, and shall be submitted with supporting data to the contracting activity for approval (see 4.4.1.1).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.3.4.3 Gimp. The gimp for reinforcing buttonholes shall be cotton, size No. 8, conforming to type I or II of V-T-280.

3.3.5 Labels. Each of the trousers shall have an identification label and instruction label or a combination identification and instruction label, and size label conforming to type VI of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.3.5.1 Identification label. The identification label shall conform to class 1.

3.3.5.2 Size label. The size label for the trousers shall conform to class 2. The size label shall include both the adjective (designating length) and numeric size.

3.3.5.3 Instruction label. The instruction label shall conform to class 3 and shall contain the following information:

Washing Instructions

Machine Wash (close slide fastener)

Use "Permanent Press" cycle. Wash separately from colored garments using warm water (100°F) and mild laundry detergent. Use only 2/3 regular load. Use commercial fabric softener to whiten and prevent clinging. Tumble dry using "Permanent Press" cycle (do not overload) and remove immediately from dryer. If automatic dryer is not available, shape and hang to air dry. If needed, touch up any wrinkled areas with a cool-warm iron.

Hand Wash

Wash separately from colored garments in warm water using mild laundry detergent. Rinse thoroughly. Shape and hang to air dry.

DO NOT WRING OR STARCH
DO NOT REMOVE THIS LABEL
DO NOT USE LIQUID CHLORINE BLEACH

3.3.5.4 Combination identification and instruction label. The identification (class 1) and instruction (class 3) labels may be combined into one label and shall conform to class 15.

3.3.6 Slide fastener. The slide fastener shall be polyester continuous monofilament (spiral or serpentine) type I, style 3, size M, with 9/16 ± 1/32 inch wide tape in accordance with V-F-106 requirements. The length shall be 9 inches for all sizes. The color of the tape shall be white with matching chain, slider, pull, and stops. Also, continuous chain application may be used in lieu of pre-assembled fasteners, provided bottom and top stops are applied. The waistband may serve as top stops.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.3.7 Hook and eye. The hook and eye shall be North and Judd (Hook Flex H-49, K-50, H-89 and E-90); Universal Button Co. (Talon #3, #7 and #8 hook with #8 eye or #85 eye); Akim Co. or Patwin, Inc., Junior Series, type JB; Stimpson (P-536, D-4086, D-4457, D-4288; Rau (OA50, OX1256, 080415), Patwin, Inc., (Slim-Slak with MB eye, and Silk-Slak) or equal. The finish shall be nickel plate. Prior to the use of an "or equal" item the contractor shall submit the item with supporting data to the contracting officer for approval (see 4.4.1.1).

3.3.8 Button. The button for fly tab and back pocket tab shall be polyester, DOD button shade White BA, Cable 62031, conforming to type II, class D, style 4, 22-line, of V-B-871.

3.4 Design. The trousers are dress type with a sew-on waistband with hook and eye closure, a french fly with slide fastener, straight side pockets, and double cord hip pockets. The left hip pocket has a buttonhole tab and button. An outlet is provided at seat seam and from crotch to knee at inseam. (See figure 1).

3.5 Patterns. Standard patterns will be supplied by the Government, except as allowed by table I NOTE. The standard patterns provide a seam allowance of 1/4 inch for bagging pockets and 3/8 inch for all other seams except seat seam and inseam of back part; 7/8 inch has been added to the seat seam allowance (total 1-1/4 inches at top) to allow for tapering the seat outlet and 3/4 inch has been added to the inseam of back part (total 1-1/8 inches at top) to allow for tapering the inseam outlet of back part.

3.5.1 Pattern parts. The components of the trousers shall be cut from the materials specified in table I in accordance with pattern parts indicated.

TABLE I. List of pattern parts

| Material | Nomenclature | Parts |
|---|---|---|
| Basic material (3.3.1) | Front | 2 |
| | Back | 2 |
| | Waistband | 2 |
| | Fly | 2 |
| | Fly tab | 2 |
| | Hip pocket cord | 4 |
| | Hip pocket bearer | 2 |
| | Side pocket bearer narrow | 2 |
| | Side pocket bearer wide | 2 |
| | Hip pocket | 2 |
| | Side pocket | 2 |
| | Side pocket stay | 2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts (cont'd)

| Material | Nomenclature | Parts |
|---|---|---|
| Lining material (see 3.3.2) | Right fly lining | 1 |
| | Crotch lining | 2 |
| Interlining cloth (3.3.3) | Waistband interlining | 2 |

NOTE: Patterns not furnished for belt loops, buttonhole tab, waistband lining and waistband interlining. See table II for their requirements.

3.6 Seam appearance rating. After the finished trousers have been washed and dried (see 4.4.3), the appearance rating of seams and stitching shall be as follows:

| Area | Minimum Rating, Average of 3 Observations |
|---|---|
| Outseam | 3.5 |
| Inseam | 3.5 |
| Seat seam | 3.5 |
| Side pocket | 3.5 |
| Waist | 3.5 |
| Leg hem | 3.5 |
| Front crease retention | 3.5 |
| Back pocket | 3.5 |
| Fly fastener | 3.5 |

3.7 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the document shall govern.

3.7.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams will occur (see 6.5). When two or more methods of seams or stitches are given for the same operation, any one may be used. When stitch type 401 is used, the looper (underthread) shall be on the inside of the trousers. Thread tension shall be maintained so that no tight or loose tension will result (see 6.4). Overedge stitching shall be 3/16 to 1/4 inch wide.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.7.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/2 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.7.1.1.1 Repairs of type 301 stitching.

a. When thread breaks, skipped stitches, run-offs, or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Except for prestitching, thread breaks or two or more consecutive skipped or run-off stitches noted during inspection shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.7.1.2 Type 304, 401, 502, 503, and 504 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.7.1.1.1a and b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn. Repairs to stitch type 401 may be accomplished by use of stitch type 301. Both ends of all seams and stitching produced with the 401 stitch type when not caught in other seams or stitching shall be a 1/2 inch minimum chain extending beyond each end.

3.7.1.3 Bartacks. Unless otherwise specified, all bartacks shall be 3/8 ± 1/16 inch long and 1/8 ± 1/32 inch wide, and shall contain 28 stitches. Bartacking shall be free from thread breaks and loose stitching.

3.7.1.4 Buttonholes. Buttonholes shall be the eyelet end, taper bar, or eyelet end, square bar type, worked over gimp with the end securely tacked. The finished cut length shall be 5/8 inch. The eyelet end, square bar type shall be bartacked in a separate operation. The bar at end of the taper bar type buttonhole shall have a minimum of four tacks not including the first cross-over stitch.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.7.1.5 Automatic stitching. Automatic machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch and size and type of thread are met and at least three or more tying, overlapping, or back stitches are used to secure the ends of the stitching.

3.7.1.6 Thread ends. All thread ends shall be trimmed to a length of not more than 1/4 inch unless otherwise specified.

3.8 Pressing. Pressing specified in table II shall be performed by use of a heated pressing iron or machine.

3.9 Manufacturing operations requirements. The trousers shall be made by and with the use of all operations listed in table II. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished trousers.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 1. | Cut trousers<br><br>a. Spread the material without tension in a suitable number of plies for the applicable fabric. The cut parts from the top and bottom ply shall match and correspond to the pattern.<br><br>b. Cut trousers in accordance with patterns furnished which show directional lines, size, placement of pockets and notches for the proper assembly of all parts.<br><br>c. The directional lines on the fronts and backs may vary from the warp direction by not more than 1 inch. Measurements shall be taken at the top and bottom edges of the pattern from the directional line to the selvage edge of the fabric (even side of lay) and the difference between the two measurements shall not exceed 1 inch.<br><br>d. Cut all parts of the trousers out of the same piece of material except narrow facings for side pockets, hip pocket bearers, belt loops, fly tab pieces, and fly pieces (right and left) which may be cut from ends. The parts cut from ends shall approximate the shade of the trousers.<br><br>e. Cut the stripping for belt loops and buttonhole tabs of sufficient width to comply with operation 7.<br><br>f. The selvage shall not appear on the outside of trousers. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 2. | Cut linings and interlinings.<br><br>a. Cut the right fly lining on the straight or on the bias.<br><br>b. Cut left fly interlining in the warp or filling direction.<br><br>c. Cut crotch lining pieces so that the fold will be on the bias and one of the inseam sides is in the direction of the warp.<br><br>d. Cut the waistband linings and the waistband interlinings on the bias of sufficient width to comply with operation 19. | | | | | | |
| 3. | Cut pockets.<br><br>Cut pocketing in the warp or filling direction. Cut as many as possible in the warp direction. | | | | | | |
| 4. | Shade and size marking.<br><br>Mark or ticket all component parts of trousers except parts cut from ends, to insure a correct size and uniform shade throughout the trousers. | | | | | | |
| 5. | Replacement of damaged parts.<br><br>Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as classified in MIL-STD-1488, are excluded and replaced with non-defective and properly matched material. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 6. | Overedge stitching. | | | | | | |
| | a. Overedge the seam allowance of inseam, outseam from lower side pocket notch to bottom of trousers, crotch seam, and right front edge of foreparts. The crotch linings folded in half lengthwise shall be caught in the overedge stitching. | 502 and<br>503 or<br>504 | EFd-1<br>EFd-1<br>EFd-1 | 8-10<br>8-10<br>8-10 | 70-2<br>70-2<br>70-2 | 70-2<br>70-2<br>70-2 | |
| | b. The folded crotch lining may be stitched to the foreparts in a separate operation. | 301 | SSa-1 | 8-10 | 50-3 | 50-3 | |
| | c. Overedge the seam allowance of inseam, outseam and seat seam of back parts. The side pocket stay pieces, with the bottom ends turned under, may be caught in the overedging of the outseams (see operation 16). | 502 or<br>503 or<br>504 | EFd-1<br>EFd-1<br>EFd-1 | 8-10<br>8-10<br>8-10 | 70-2<br>70-2<br>70-2 | 70-2<br>70-2<br>70-2 | |
| | d. Overedge the left end of the waistband. | 502 or<br>503 or<br>504 | EFd-1<br>EFd-1<br>EFd-1 | 8-10<br>8-10<br>8-10 | 70-2<br>70-2<br>70-2 | 70-2<br>70-2<br>70-2 | |
| | NOTE: When a knife is used on the serging machine, the gage shall be set so that the raveled ends are trimmed but the edge of the fabric is not cut off. | | | | | | |
| 7. | Make stripping (see operation 1.e.) for buttonhole tab and belt loops. | | | | | | |
| | a. Fold stripping with the edges abutted at center and stitch with each row of stitching not less than 1/16 inch from edge and the covering stitch on the underside. The finished stripping shall measure 5/16 to 3/8 inch wide. | 406 | EFh-1 | 12-14 | 50-3 | 50-3 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 7. | Make stripping (see operation 1.e.) for buttonhole tab and belt loops. (cont'd) | | | | | | |
| | -or- | | | | | | |
| | b. Fold stripping with both edges turned in and the turned-in edges abutted at center and stitch with a covering stitch. | 105 | EFae-1 | 12-14 | 50-3 | 50-3 | |
| | -or- | | | | | | |
| | c. Turn in one side of stripping. Fold stripping with the turned-in edge overlapped on the raw edges at center and stitch with a covering stitch. | 105 | -- | 12-14 | 50-3 | 50-3 | |
| 8. | Make hip pocket buttonhole tab. | | | | | | |
| | a. Cut a piece of stripping (see operation 7) of sufficient length to comply with operation 8b below and to measure 1-1/4 ± 1/8 inches long when attached to the left hip pocket. | | | | | | |
| | b. Fold the piece in half and abut the side edges forming a point. Bartack across the abutted edges at pointed end catching the base of the triangle. Place a second bartack across the abutted edges 5/8 ± 1/16 inch from the first tack, forming a slit buttonhole. The bartacks shall be 3/8 to 1/2 inch long. | Bartack or<br>Automatic loop tacker | --<br>-- | 21-28 per tack<br>24-28 per tack | 50-3<br>50-3 | 50-3<br>50-3 | |



NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 9. | Make fly tab | | | | | | |
| | a. With face sides together, stitch the two fly tab pieces together along the sides and the pointed end; trim corners and point; turn face side out; force out points and edges and edge stitch 1/16 to 1/8 inch from edge. | 301 or<br>401 and<br>301 | SSe-2(a)<br>SSe-2(a)<br>SSe-2(b) | 10-16<br>10-16<br>12-16 | 50-3<br>50-3<br>50-3 | 50-3<br>70-2<br>50-3 | |
| | b. Make buttonhole at pointed end of tab as indicated by pattern, with the inside edge of the eyelet 5/8 to 3/4 inch from point. The purling shall face the wearer on the finished trousers. The eyelet end, square bar type buttonholes shall be bartacked with 21 stitches per bar. | Button-hole | -- | 52-54 per button-hole including tack | 50-3 | 50-3 | |
| 10. | Make flies. | | | | | | |
| | a. Superimpose left fly on left fly interlining and overedge curved side together. Stitch back edge of fastener tape to left fly (through all plies) with two rows of stitching. The end of the scoops shall be 1/4 to 1/2 inch above the fly notch when fasteners are cut and scoops removed. When the trousers are finished, the edge of the chain shall be 1/2 to 5/8 inch from edge at top, tapering to 1/4 to 3/8 inch from edge at bottom (figure 3A). | 301 or<br>401 | LSbj-2<br>LSbj-2 | 12-16<br>12-16 | 50-3<br>50-3 | 50-3<br>70-2 | |
| | b. After fastener is cut and the scoops removed, stitch the fastener tape to back edge of right fly, with bottom end of scoops 1/4 to 1/2 inch above the fly notch (figure 3B). | 301 | SSa-1 | 6-10 | 70-2 | 70-2 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 10. | Make flies. (cont'd) | | | | | | |
| | c. With the fly tab positioned 3/8 to 3/4 inch from the top raw edge of right fly, seam the fly lining to the front edge of the right fly to within 1 ± 1/4 inches from top of fly inclosing the fly tab between the two plies. On the finished trousers the fly, fly tab and waistband shall lie smooth and flat when fly tab is buttoned (figure 3C). | 301 or<br>401 | SSe-2(a)<br>SSe-2(a) | 10-16<br>10-16 | 50-3<br>50-3 | 50-3<br>70-2 | |
| | d. Overedge the back edge of the left fly (and interlining when applicable) (figure 3E). | 503 or<br>504 | SSa-1<br>SSa-1 | 6-10<br>6-10 | 70-2<br>70-2 | 70-2<br>70-2 | |
| 11. | Seam darts in back. | | | | | | |
| | a. Fold the backs, matching the cut edges of waist darts. Seam lengthwise along the entire length of the dart, starting 3/8 inch from cut edges at the top end and tapering to a point at the lower end as indicated by marks on patterns. | 301 | SSa-1 | 12-16 | 50-3 | 50-3 | |
| | b. Spread open and press darts smooth and flat with heated pressing iron or pressing machine. | | | | | | |
| 12. | Make hip pockets and attach label(s). | | | | | | |
| | Finished appearance. The pockets shall be in alignment, uniform in width and depth and shall finish 5-3/4 to 6-1/4 inches deep. There shall be no raw edges or pleats at the end of the openings. The pocket openings shall finish 5-1/4 ± 1/8 inches long. | | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 12. | Make hip pockets and attach label(s). (cont'd) | | | | | | |
| | a. Position the combination identification and instruction label (see 3.2.5.4) or instruction label (see 3.2.5.3), as applicable, on the bottom of the right rear pocketing so that on the finished trousers it will face the wearer. No part of the label printing will be covered by the waistband interlining curtain. Stitch on all four sides. Stitching shall not be through the printing. | 301 | LSbj-1 | 10-16 | 50-3 | 50-3 | |
| | b. Turn in lower raw edge of bearer and seam to pocket at notches. When the bearer piece is cut on the selvage, the edge need not be turned in (figure 5A). | 301 | LSd-1 | 12-16 | 50-3 | 50-3 | |
| | c. Position cord facing piece on outside of trousers as indicated on pattern with the pocketing placed on the underside (as indicated by solid line on pattern) and stitch to trousers through pocketing with two rows of stitching (figure 5B). | 301 | -- | 12-16 | 50-3 | 50-3 | |
| | d. Cut opening between the rows of stitching through all plies simultaneously, turn lower part of facing through the cut opening and raise stitch forming a 1/8 to 3/16 inch cord edge (figures 5C, 5D, and 5E). | 301 | -- | 12-16 | 50-3 | 50-3 | |
| | e. Turn in raw edges of cord facing piece and seam to pocketing. When cord facing piece is cut on the selvage the edge need not be turned in (figure 5E). | 301 | LSd-1 | 12-16 | 50-3 | 50-3 | |
| | f. Fold pocketing, seam the sides and turn to finished position (figure 5F). | 301 or<br>401 | SSae-2(a)<br>SSae-2(a) | 12-16<br>12-16 | 50-3<br>50-3 | 50-3<br>70-2 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

MIL-T-44294

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 12. | Make hip pockets and attach label(s). (cont'd) | | | | | | |
| | g. Smooth out pocketing and single stitch 5/16 to 3/8 inch from edge. The stitching may extend across the bottom folded edge. The ends of the bearer and cord facing piece shall be caught by the edge stitching only (figure 5G). | 301 | SSae-2(b and OSf-1 | 12-16<br>12-16 | 50-3<br>50-3 | 50-3<br>50-3 | |
| | h. Form a 1/8 to 3/16 inch cord of the facing on the upper edge of pocket opening, insert buttonhole tab at center (1/4 inch off center tolerance) on left hip pocket and raise stitch the seam through the trousers, cord facing piece, pocket bearer and pocketing, closing the top of pocket (figure 5H). | 301 | -- | 12-16 | 50-3 | 50-3 | |
| | i. Tack ends of pocket opening 1/4 to 3/8 inch through cord, bearer, and pocketing.<br>-or- | 301 | -- | 12-16 | 50-3 | 50-3 | |
| | j. Operations 12c and 12d above may be accomplished with a double piped pocket machine which stitches, cuts and turns piped edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine and the machine manufacturer's recommended pocket-stay material may be used.<br>-and- | 101 | -- | 12-16 | 50-3 | -- | |
| | k. Raise stitch the joining seam of lower piping piece through back of trousers and piping piece only; raise stitch the joining seam of the top piping piece through all plies closing the top of pocket. The ends of the pocket openings shall be securely tacked. | 301 | -- | 12-16 | 50-3 | 50-3 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 13. | Make side pockets. | | | | | | |
| | Place facing and bearer on pocketing and stitch along the inner side, with the raw edge turned in, and across the lower end (figure 2A). A selvage edge need not be turned in. | 301<br>301 | LSd-1 and LSbj-1 | 10-16<br>10-16 | 50-3<br>50-3 | 50-3<br>50-3 | |
| 14. | Attach side pockets. | | | | | | |
| | Finished appearance. The edges of the pocket openings shall not be distorted. The openings shall be aligned, uniform in length, and shall measure not less than 5-3/4 nor more than 6-1/2 inches between tacks. Avoid notching the pocket or underside beyond the width of the side seam allowance. | | | | | | |
| | a. Seam side pocket to front, as indicated by marks on pattern. Notch for pocket opening, turn to finished position with the seam to the back of the front edge and stitch 3/16 to 1/4 inch from edge (figures 2B and 2C). | 301 | SSe-2 | 12-16 | 50-3 | 50-3 | |
| | b. Fold pocket right-side-out and seam raw edges from step to folded edge of pocketing. Notch pocket and facing at top of step and turn pocket (figures 2D and 2E). | 301 or<br>401 | SSae-2(a<br>SSae-2(a | 12-16<br>12-16 | 50-3<br>50-3 | 50-3<br>70-2 | |
| | c. Tack ends of the openings to the bearer with a 1/4 to 3/8 inch tack. The right and left pocket openings shall not be out of alignment by more than 1/2 inch (figure 2F). | 301 | -- | 12-16 | 50-3 | 50-3 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 15. | Sew on flies.<br><br>Finished appearance. The ends of the flies shall be even where they join the crotch seam. The fly shall lie flat without twists or puckers when fastener is closed. | | | | | | |
| | a. Sew on right fly (slide fastener and fly tab, if separate piece, attached) with notches matched (figure 3F). | 301 | SSa-1 | 12-16 | 50-3 | 50-3 | |
| | b. Sew on left fly (slide fastener attached) with notches matched. Turn fly to inside with the seam 1/16 to 1/8 inch back of folded edge and press front edge without damage to the fastener (figures 3G and 3H.) | 301 | SSa-1 | 12-16 | 50-3 | 50-3 | |
| 16. | Join outseams. | | | | | | |
| | a. Join outseams with the notches matched, catching the pocket stay piece with the bottom ends turned under (if not previously caught in overedge operation) (see operation 6c). | 301 or<br>401 | SSa-1<br>SSa-1 | 12-14<br>12-14 | 50-3<br>50-3 | 50-3<br>70-2 | |
| | b. Press outseam open from bottom to top of trousers. The pocket stay pieces may be folded over the open seam and pressed into position for operation 17. | | | | | | |



NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 74 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 17. | Finish side pockets. | | | | | | |
| | Turn in back edge of side pockets and the edge of stay pieces and stitch to stay pieces 1/4 to 3/8 inch from edge along the side seam allowance. Continue the stitching around pocket to folded edge and securely backstitch end of seam (figure 2G). | 301<br>301 | SSc-1 and SSae-2(b) | 12-16<br>12-16 | 50-3<br>50-3 | 50-3<br>50-3 | |
| 18. | Attach waistband and set belt loops. | | | | | | |
| | Finished appearance. The finished waistband shall measure 1-1/2 ± 1/8 inches wide. There shall be seven loops for sizes up to and including 37 and eight loops for sizes 38 and up. The loops shall be positioned as follows:<br><br>One on each front as indicated by patterns.<br>One at each outseam on back.<br>One centered between outseam and seat seam.<br>One on seat seam (see operations 27a and 27b).<br>The extra loop for larger sizes, on right front 1-1/4 to 1-3/4 inches from right fly joining seam. | | | | | | |
| | a. Stitch right and left waistbands to trousers catching the ends of belt loops (except center back loop, see operations 27a and 27b) in the stitching. | 301 or<br>401 | SSa-1<br>SSa-1 | 12-14<br>12-14 | 50-3<br>50-3 | 50-3<br>70-2 | |
| | b. Press waistband seams open. | | | | | | |
| | NOTE: The waistband lining may be attached to the waistband (operation 19) prior to setting the trousers. | | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 19. | Make and join waistband linings.<br><br>Finished appearance. The waistband linings shall measure not less than 2 inches wide in the finished trousers. The waistband linings may be pieced providing the seam is flat and there is no more than one piecing on each trouser. The waistband stabilizer may be 1 inch shorter than the waistband lining at seat seam. | | | | | | |
| | a. Overlap the lining on the interlining 1 inch (see operation 2d) and stitch 1/8 to 3/16 inch from edge of lining. Position waistband stabilizer to opposite remaining edge of interlining and stitch 1/2 inch from edge. Fold lining over interlining and press. | 101 or<br>301 or<br>401 | LSa-1<br>LSà-1<br>LSà-1 | 6-10<br>6-10<br>6-10 | 50-3<br>50-3<br>50-3 | --<br>50-3<br>70-2 | |
| | b. A commercial waistband conforming to specified requirements may be used.<br><br>-or-<br><br>c. The waistband stabilizer may be inserted during the joining of the waistband and waistband lining | | | | | | |
| | d. Turn under top edge of waistband lining and stitch to top edge of waistband catching interlining stabilizer and the top of the belt loops with a row of simulated hand felling or fell by hand. The belt loops shall lie flat and shall not deviate from the straight by more than 3/16 inch. | 304 or<br>404<br>Hand | --<br>--<br>-- | 12-16<br>12-16<br>6-8 | 50-3<br>50-3<br>50-3 | 50-3<br>70-2<br>-- | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 19. | Make and join waistband linings. (cont'd) | | | | | | |
| | e. Tack the tops of the belt loops to the waistband through waistband but not through waistband lining. The bartack shall not be visible on the outside of the trousers when waistband lining is folded to the inside. The tacks shall extend the width of the loop. | 301 or<br>Bartack<br>or<br>Automatic loop tacker | --<br>--<br>-- | 12-16<br>28 per bartack<br>24-28 per tack | 50-3<br>50-3<br>50-3 | 50-3<br>50-3<br>50-3 | |
| | f. (When option to extend waistband lining to right end of waistband is exercised). Turn right end of waistband lining to the outside and stitch to front edge of waistband catching the top of the fly lining in the stitching. | 301 or<br>401 | SSe-2(a)<br>SSe-2(a) | 12-16<br>12-16 | 50-3<br>50-3 | 50-3<br>70-2 | |
| | g. Fold waistband lining to the inside and baste or press top edge. The lining shall not be exposed beyond the top of waistband. | | | | | | |
| 20. | Attach hooks and eyes. | | | | | | |
| | a. Position the hook on the center (1/4 inch off center tolerance) of the left waistband with the rolled edge of the hook aligned with the slide fastener scoops. Attach through a suitable reinforcement. | | | | | | |
| | b. Position the eye on the center of the right waistband, aligned with slide fasteners scoops, to correspond to the hook on left waistband. Attach through a suitable reinforcement. | | | | | | |
| | NOTE: When the hook and eye are engaged on the finished trousers, the closure shall not bulge, pucker, or twist. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD: NEEDLE | THREAD: BOBBIN/ LOOPER | THREAD: COVER |
|---|---|---|---|---|---|---|---|
| 21. | Finish right and left flies.<br><br>Finished appearance. The top corners of the right (when applicable) and left flies shall be completely forced out and shall not be bulky. The stitching of the left fly shall be uniformly spaced from edge of fly. The seam joining the left fly to the fore-part shall not be exposed on outside of trousers, when fastener is closed. The right fly lining shall not be exposed on outside. The flies shall be smooth without twists or puckers or excessive fullness. | | | | | | |
| | a. Continue the stitching of the fly lining to the top of the waistband. | 301 or<br>401 | SSe-2(a)<br>SSe-2(a) | 12-16<br>12-16 | 50-3<br>50-3 | 50-3<br>70-2 | |
| | b. Turn right fly lining to the inside and stitch 1/16 to 1/8 inch from front edge. Turn in fly lining at top of waistband and continue the stitching across top; turn in raw edge of fly lining and raise stitch the fly joining seam catching the fly lining in the stitching (figures 3D and 4J). The edge stitching along front edge of fly may be accomplished in a separate operation. | 301<br><br>301<br><br>301 | SSe-2(b)<br>and<br>SSc-1<br>and<br>LSq-2(b) | 12-16<br><br>12-16<br><br>12-16 | 50-3<br><br>50-3<br><br>50-3 | 50-3<br><br>50-3<br><br>50-3 | |
| | c. Turn back end of waistband in line with the front folded edge of left fly and stitch across top of waistband the width of the fly. Trim, turn, and work out corner (figure 4K). | 301 | SSa-1 | 12-16 | 50-3 | 50-3 | |
| | d. Stitch down left fly with waistband lining smoothly inserted between fly and trouser. The stitching shall be 1-3/8 ± 1/8 inches from front edge of fly, extend from top of waistband, and curve to fly notch (figure 4K). | 301 | -- | 12-16 | 50-3 | 50-3 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 22. | Join inseams. | | | | | | |
| | a. Join inseams forming outlet tapering the seam allowance of back part from 1-1/8 inches at crotch to 3/8 inch at notch (knee). The seam shall start and finish evenly and the notches shall match. | 301 | SSa-1 and | 12-16 | 50-3 | 50-3 | |
| | | 301 or | SSa-1 | 12-16 | 50-3 | 50-3 | |
| | | 401 | LSr-2(a) and | 12-16 | 50-3 | 70-2 | |
| | | 401 | SSa-1 | 12-16 | 50-3 | 70-2 | |
| | b. Press inseams open. | | | | | | |
| 23. | Join seat seams. | | | | | | |
| | Finished appearance. The seat seam shall be joined with stitch tension of sufficient elasticity to meet strain encountered in sitting or stooping. The waist shall be measured before the seat seam is joined to assure correct waist size. In the joining of the seat seam, the inseam shall meet and the right and left waistband joining seams shall be aligned. The base of the left fly shall cover the right fly on outside of the finished trousers. | | | | | | |
| | a. Join seat seam from base of fly to end of waistband lining with a double needle set seamer with the rows of stitching 1/64 to 1/32 inch apart. The seam from the waistband joining seam to the end of the waistband lining shall be perpendicular (90 degree angle) to the waistband joining seam. | 401 | SSa-2 | 8-10 each needle | 50-3 | 70-2 | |
| | b. Press crotch and seat seam open. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

MIL-T-44794

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 24. | Finish waistband and attach size label. | | | | | | |
| | a. Top stitch the spread open waistband seam 1/16 inch below the joining seam on the trouser side, simultaneously catching the waistband lining (with the ends at center back folded in). The stitching shall not extend across the fly except when option to extend waistband lining to right end of waistband is exercised. Pockets may be stitched or basted to waistband seam allowance prior to top stitching. | 301 | LSbd-2(b) | 12-16 | 50-3 | 70-2 | |
| | b. Stitch the top edge of the size label (see 3.2.5.2) to lower edge of waistband lining above the right hip pocket. The end of the stitching need not be tacked providing the stitching extends at least 1/2 inch beyond each end of the label. The stitching shall not be through the printing. | 301 | -- | 10-14 | 50-3 | 50-3 | |
| 25. | Assemble slide fastener. | | | | | | |
| | Attach slider and, with the ends of the chain even, staple the fastener together. | | | | | | |
| 26. | Stitch right fly extension. | | | | | | |
| | Turn in the raw edges of the right fly extension piece and machine stitch or hand fell to each side of the spread-open crotch and seat seam (figure 4L). | 301 or | SSac-3(b), (c), (d) | 12-16 | 50-3 | 50-3 | |
| | | Hand | SSac-3(b), (c), (d) | 6-8 | 50-3 | -- | |



NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 27. | Attach center back belt loop.<br><br>Finished appearance. The tacking shall extend the width of the loop but not beyond. | | | | | | |
| | a. Turn under top end of belt loop, position over seat seam even with top of waistband and stitch, tack, or bartack to trousers 1/16 to 1/8 inch from folded edge. | 301 or<br>Bartack<br>or<br><br>Automatic loop tacker | LSd-1<br>LSd-1<br><br>LSd-1 | 12-16<br>21-28 per bartack<br><br>24-28 per tack | 50-3<br>50-3<br><br>50-3 | 50-3<br>50-3<br><br>50-3 | |
| | b. Turn under bottom end of belt loop and bartack to trousers 1/4 ± 1/8 inch below waistband. The opening of the finished loop shall measure 1-1/2 to 1-5/8 inches between tacks. | 301 or<br>Bartack<br>or<br><br>Automatic loop tacker | LSd-1<br>LSd-1<br><br>LSd-1 | 12-16<br>21-28 per bartack<br><br>24-28 per tack | 50-3<br>50-3<br><br>50-3 | 50-3<br>50-3<br><br>50-3 | |
| 28. | Make buttonhole (applicable to fly with integrated fly tab).<br><br>Make buttonhole at end of tab, as indicated by pattern, with the inside edge of eyelet 5/8 to 3/4 inch from point. The purling shall face the wearer on the finished trousers. The eyelet end, square bar type buttonhole shall be bartacked with 21 stitches per bar. | Buttonhole | -- | 52-54 per button-hole including tack | 50-3 | 50-3 | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 29. | Mark or gage and sew buttons.<br><br>Finished appearance. The buttons shall be securely sewn and properly aligned with buttonholes. Hand sewn buttons shall be shank wrapped three times and the ends of the thread shall be securely tacked with not less than two stitches. Machine sewn buttons which are automatically shanked shall have a minimum of ten wraps with three locking stitches.<br><br>NOTE: All machine sewn buttons shall be shank wrapped.<br><br>a. Sew a 22-line button on the left waistband lining to correspond with the fly-tab buttonhole. The stitching shall not be visible on the outside of the trousers. | 301 or | -- | 14-16 per button | 50-3 | 50-3 | |
| | | 101 or | -- | 14-16 per button | 50-3 | -- | |
| | | Hand | -- | 4 double per button not including shank wrapping | 50-3 | -- | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| NO. | TABLE II. (cont'd)<br>MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 29. | Mark or gage and sew buttons. (cont'd) | | | | | | |
| | b. Sew on 22-line button on left hip pocket through pocket and facing to correspond to buttonhole tab. | 301 or | -- | 14-16 per button | 50-3 | 50-3 | |
| | | 101 or | | 14-16 per button | 50-3 | -- | |
| | | Hand | | 4 double per button not including shank wrapping | 50-3 | -- | |
| 30. | Bartacking. | | | | | | |
| | Finished appearance. The bartacks shall be well made and correctly placed to reinforce points of strain as specified. The bartacks at side pocket openings shall extend beyond the outseams 1/16 to 1/8 inch. | | | | | | |
| | a. Bartack all pockets at ends of pocket openings. The bartacks shall be perpendicular to the openings. | Bartacks | -- | 21-28 per bartack | 50-3 | 50-3 | |
| | b. Bartack at base of fly at the junction of the crotch seam and fly. The bartack may be diagonal, in line with the fly stitching, or may be horizontal and shall not extend beyond the crotch seam (figure 4M). | Bartacks | -- | 21-28 per bartack | 50-3 | 50-3 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

| NO. | MANUFACTURING OPERATIONS REQUIREMENTS | STITCH TYPE | SEAM AND STITCHING TYPE | STITCHES PER INCH | THREAD | | |
|---|---|---|---|---|---|---|---|
| | | | | | NEEDLE | BOBBIN/ LOOPER | COVER |
| 30. | Bartacking. (cont'd) | | | | | | |
| | c. The inside edges of the right and left flies shall be bartacked together. | Bartack | -- | 21-28 per bartack | 50-3 | 50-3 | |
| 31. | Finish trouser bottoms. | | | | | | |
| | a. Overedge around bottom of legs. | 503 or 504 | EFaf-1 | 6-10 | 70-2 | 70-2 | |
| | b. Turn leg bottoms to the inside 3 inches and hem in place. | 106 | EFaf-2 | 6-10 | 70-2 | 70-2 | |
| 32. | Cleaning. | | | | | | |
| | a. Trim all ends of stitching and remove loose threads. | | | | | | |
| | b. Trim ends of center back belt loop to a length of 1/16 to 1/4 inch. | | | | | | |
| | c. Remove all spots, stains and marking tickets. | | | | | | |
| 33. | Pressing. | | | | | | |
| | a. Press and crease the legs with the seam matching at the bottoms and knees. | | | | | | |
| | b. Press tops of trousers, including fly and pockets. | | | | | | |
| | c. Close slide fastener, fasten waistband, and button hip pocket. | | | | | | |

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.10 Finished measurements. The finished trousers shall conform to the measurements shown in table III. The tolerance shall be ± 1/4 inch for 1/2 waist and 1/2 seat, and ± 1/2 inch for inseam and outseam measurements.

TABLE III. Measurement in inches

| Size | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 |
|---|---|---|---|---|---|---|---|---|---|---|
| 1/2 Waist 1/ | 14 | 14-1/2 | 15 | 15-1/2 | 16 | 16-1/2 | 17 | 17-1/2 | 18 | 18-1/2 |
| 1/2 Seat 2/ | 19 | 19-1/2 | 20 | 20-1/2 | 21 | 21-1/2 | 22 | 22-1/2 | 23 | 23-1/2 |
| Inseam 3/ | | | | | | | | | | |
| X-Short | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 |
| Short | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 |
| Regular | 31 | 31 | 31 | 31 | 31 | 31 | 31 | 31 | 31 | 31 |
| Long | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 |
| X-Long | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 |
| Outseam 4/ | | | | | | | | | | |
| X-Short | 36-1/4 | 36-3/4 | 36-1/2 | 36-5/8 | 36-3/4 | 36-7/8 | 37 | 37-1/8 | 37-3/8 | 37-1/2 |
| Short | 37-3/4 | 37-7/8 | 38 | 38-1/8 | 38-1/4 | 38-3/8 | 38-1/2 | 38-5/8 | 39-3/4 | 39-7/8 |
| Regular | 40-1/4 | 40-3/8 | 40-1/2 | 40-5/8 | 40-3/4 | 40-7/8 | 41 | 41-1/8 | 41-1/4 | 41-3/8 |
| Long | 42-3/4 | 42-7/8 | 43 | 43-1/8 | 43-1/4 | 43-3/8 | 43-1/2 | 43-5/8 | 43-3/4 | 43-7/8 |
| X-Long | 44-1/4 | 44-3/8 | 44-1/2 | 44-5/8 | 44-3/4 | 44-7/8 | 45 | 45-1/8 | 45-1/4 | 45-3/8 |



Source: https://assist.dla.mil - Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

TABLE III. Measurements in inches (cont'd)

| Size | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1/2 Waist 1/ | 19 | 19-1/2 | 20 | 20-1/2 | 21 | 21-1/2 | 22 | 22-1/2 | 23 | 23-1/2 | 24 |
| 1/2 Seat 2/ | 24 | 24-1/2 | 25 | 25-1/2 | 26 | 26-1/2 | 26 | 27-1/2 | 28 | 28-1/2 | 29 |
| Inseam 3/ | | | | | | | | | | | |
| X-Short | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 | 27 |
| Short | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 | 29-1/2 |
| Regular | 31 | 31 | 31 | 31 | 31 | 31 | 31 | 31 | 31 | 31 | 31 |
| Long | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 33-1/2 | 32-1/2 |
| X-Long | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | |
| Outseam 4/ | | | | | | | | | | | |
| X-Short | 37-5/8 | 37-3/4 | 37-5/8 | 38 | 38-1/8 | 38-1/4 | 38-3/8 | 38-1/2 | 38-1/2 | 38-5/8 | 38-3/4 |
| Short | 40 | 40-1/8 | 40-1/4 | 40-3/8 | 40-1/2 | 40-5/8 | 40-3/4 | 40-7/8 | 41 | 41-1/8 | 41-1/4 |
| Regular | 41-1/2 | 41-5/8 | 41-3/4 | 41-7/8 | 42 | 42-1/8 | 42-1/4 | 42-3/8 | 42-1/2 | 42-5/8 | 42-3/8 |
| Long | 44 | 44-1/8 | 44-1/4 | 44-3/8 | 44-1/2 | 44-5/8 | 44-3/4 | 44-7/8 | 50 | 50-1/8 | 50-1/4 |
| X-Long | 45-1/2 | 45-5/8 | 45-3/4 | 45-7/8 | 46 | 46-1/8 | 46-1/4 | 46-3/8 | 51-1/2 | 51-5/8 | 51-3/4 |

1/ With slide fastener closed and waistband hooked, measure along top edge of waistband from folded edge to folded edge.

2/ With slide fastener closed, measure across trousers, one inch above fly bartack, from folded edge to folded edge.

3/ Measure along inseam from crotch seam to hemmed trouser bottom.

4/ Measure along outseam from bottom edge of waistband to hemmed trouser bottom.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. The finished trousers shall conform to the quality of product established by this document.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Quality conformance inspection (see 4.3).

4.3 First article inspection. When a first article is required (see 3.1), it shall be examined for the defects specified in 4.4.2. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Certification. A certificate of compliance will be acceptable as evidence that the hook and eye fasteners conform to the requirements specified in 3.3.7 and that the waxed thread conforms to the requirements specified in 3.3.4.2.

4.4.2 Point count inspection. Sampling and inspection provisions for end item examination of dress (d) trousers, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1488.

4.4.3 End item seam examination. Samples submitted for examination shall be evaluated initially and after one laundering cycle following the label washing instructions. Touch-up with a warm iron prior to evaluation is permitted. Evaluation shall be done by three trained observers working independently of each other. Test samples should be placed on a lighted viewing board (See AATCC TM 124) in such a manner that they lie flat on the surface of the board. The photographic standard for single needle seams shall also be placed on the viewing board. The observers shall stand directly in front but 4 feet from the test items. The observers shall then compare the test items to the photographic standard in each of the areas specified below and assign a rating to each area. The rating value assigned to an area by the observer shall be the numerical value of the photographic standard that most nearly matches the area. Seams appearing to fall between the numerical values of the photographic standard may be rated 2.5, 3.5, or 4.5. Rating values assigned by each of the observers shall be recorded. The average of the rating values assigned by each observer to the same area shall be the rating value for that area. If a range of 1.5 or more is noted between the highest and lowest value ratings of the 3 trained observers, then the evaluation for that area of observation should be discarded and be repeated by 3 new trained observers, if possible. One or more seams listed in 3.6 not meeting the minimum appearance rating shall be considered a defect.

NOTE: Photographic standards for evaluating single needle stitching are available from the American Association of Textile Chemists and Colorists (see 2.2).

4.4.4 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

| Examine | Defect |
|---|---|
| Finished dimensions | Length, width, or height exceeds specified maximum requirements |
| Palletization | Pallet pattern not as specified.<br>Interlocking of loads not as specified.<br>Load not bonded as specified. |
| Weight | Exceeds maximum load limits. |
| Marking | Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. |

## 5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each pair of trousers with side fastener closed, shall be neatly folded to approximate dimensions of 14 inches in length by 11-1/2 inches in width. Each folded pair of trousers shall be placed in a snug-fitting plastic bag conforming to A-A-50083.

5.1.2 Commercial. Trousers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial.

5.2.1 Level A packing. Twenty-four pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 23 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed and reinforced in accordance with method III of the appendix of PPP-B-636. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Twenty-four pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 23



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II, as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), shipping containers shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.3 Commercial. Trousers, unit packed as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), trousers packed as specified in 5.2.2 and 5.2.3 shall be palletized in accordance with load type 1a of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with Appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and unitized pallet loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951.

5.4.1 Plastic bagged unit packs. Plastic bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.4.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSNs" plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and NSNs contained therein.

6. NOTES

6.1. Intended use. The trousers are intended for wear as a hospital duty or food handler uniform by male personnel of the Department of Defense.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size required (see 1.2).
c. When a first article is required (see 3.2, 4.3, and 6.4).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 Samples and shade samples. For access to sample of the end item and shade samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Suggested sewing techniques.

(a) The needles used for all seams should be as fine as possible consistent with the size or diameter of the thread used.
(b) The throat plate hole should be no larger than necessary to permit free entry of the needle and to prevent flagging.
(c) The finest feed, approximately 18 teeth per inch, possible should be used with a presser foot to exactly match the shape and size of the feed. The face of the presser foot (underside next to the feed on the machine) should be highly polished to eliminate roughness and reduce drag. Diamond shaped feed teeth have been used quite successfully.
(d) The lightest presser foot pressure should be used to prevent stretching of the top ply of material.
(e) In the safety stitch machine for stitch types 515, 516, and 519, the upper and lower trimming knives should be kept at peak sharpness to prevent "dragging" of the edge of the fabric.
(f) On stitch type 301 sewing, the bobbin tension should be adjusted so that when a full bobbin is placed in the bobbin case and threaded through the tension spring, the bobbin and case will ride slowly down the thread when the free end of the thread is held in the vertical position. Needle tension should be adjusted after the bobbin tension to provide slightly more needle thread than bobbin thread in the stitch.
(g) Thread takeup mechanism should be set on all machines to relieve as much tension as possible when forming the stitch. All thread contacts should be well polished and free of burrs, cuts and rough spots.

6.6 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.7 Subject term (key word) listing.

Hospital
Man's
Trouser



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Air Force - 11

Review activities:

Army - MD
Air Force - 82-99
DLA - CT

Preparing activity:

Army - GL

Project No. 8405-0034



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

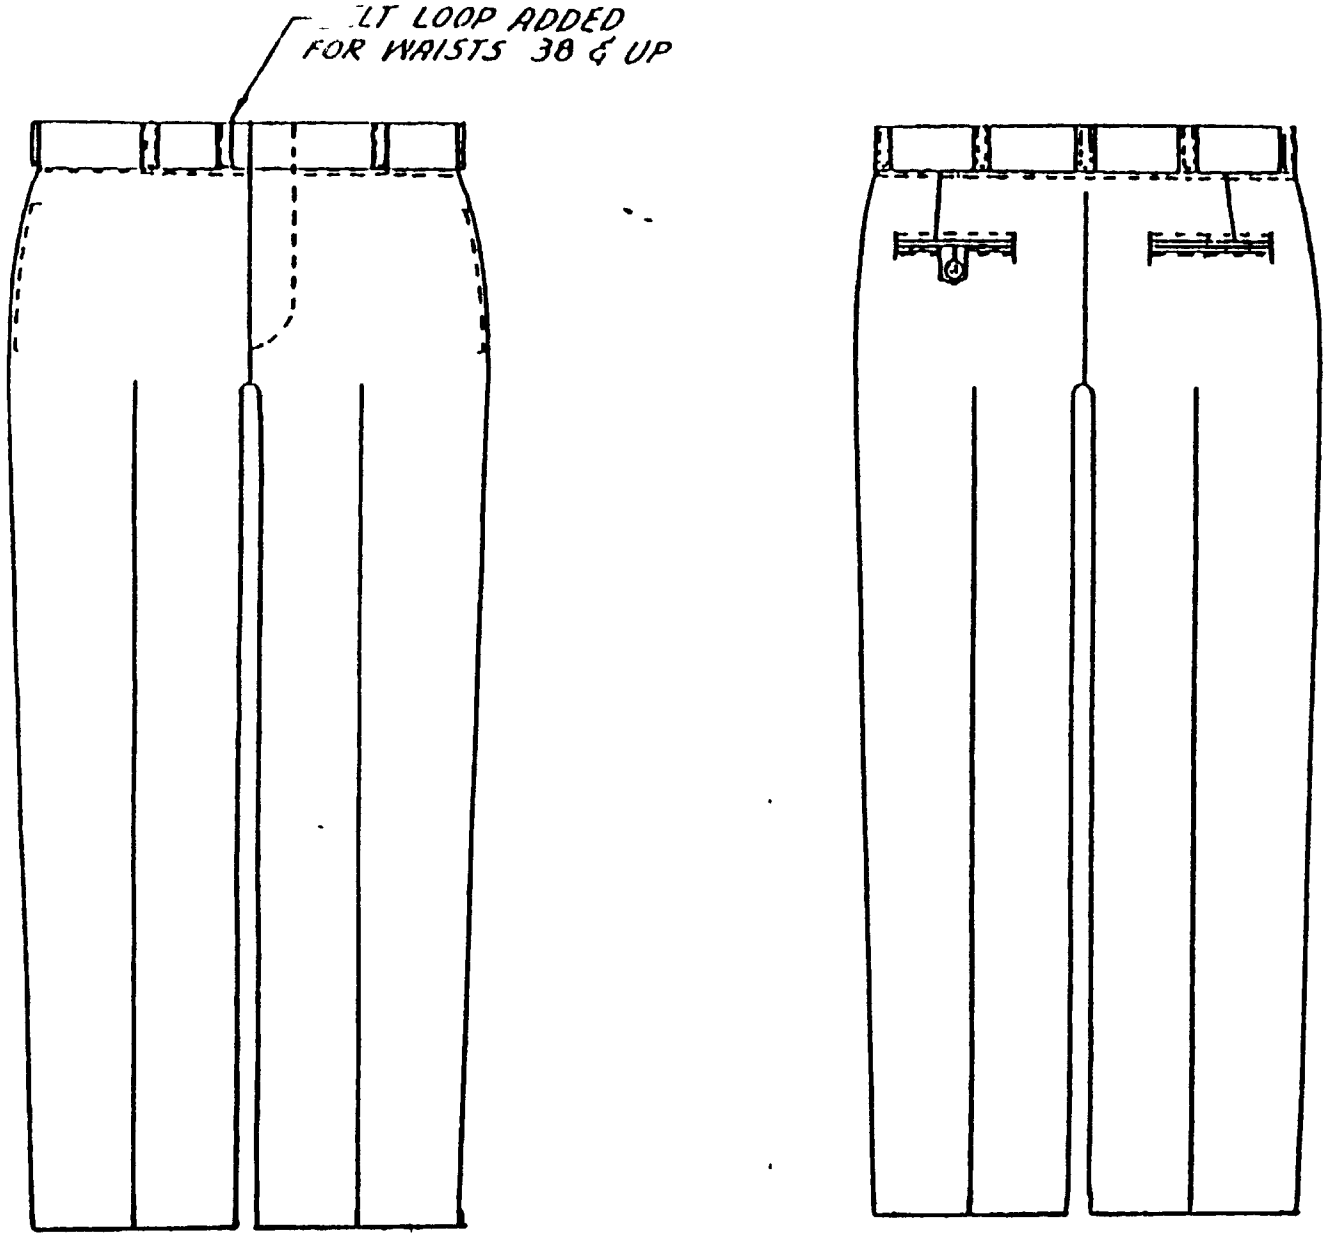



FIGURE 1. TROUSERS, MEN'S (HDV)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

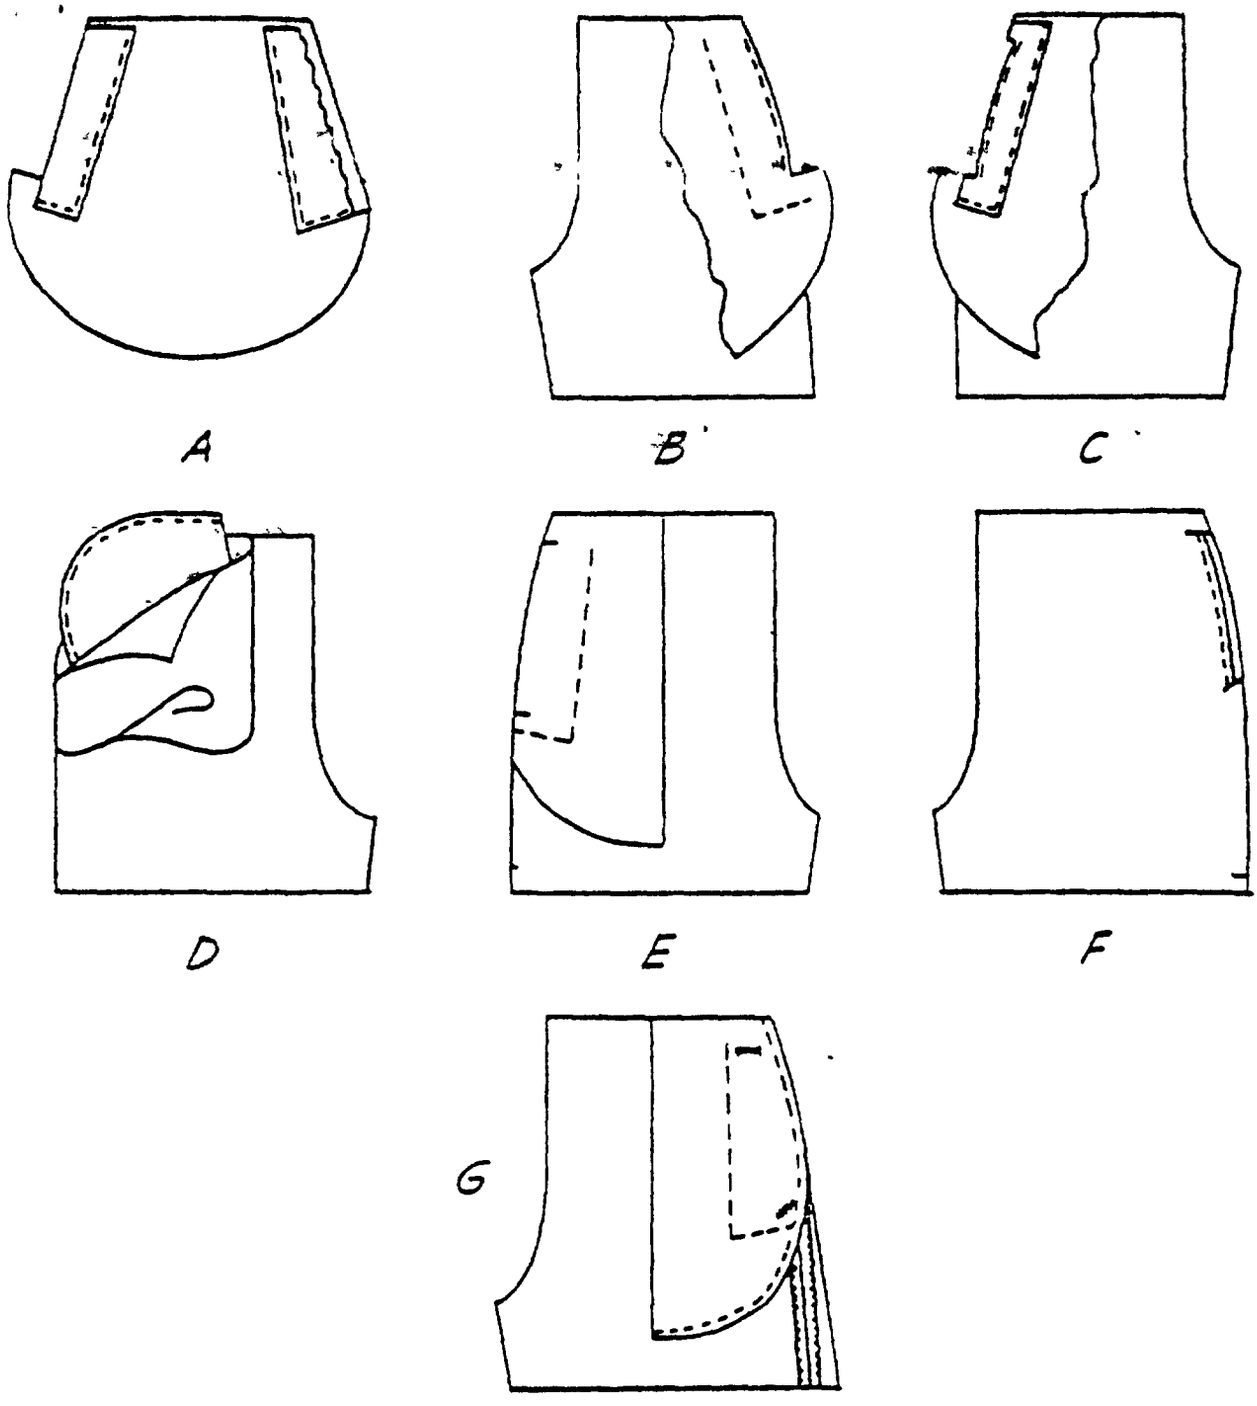



FIG. 2 SIDE POCKET

A - STITCH FACING AND BEARER TO POCKET
B - STITCH POCKET TO FRONT
C - TURN POCKET AND TOP STITCH
D&E - SEAMED AND TURNED
F - TACK POCKET OPENING TO BEARER
G - FINISHED POCKET



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

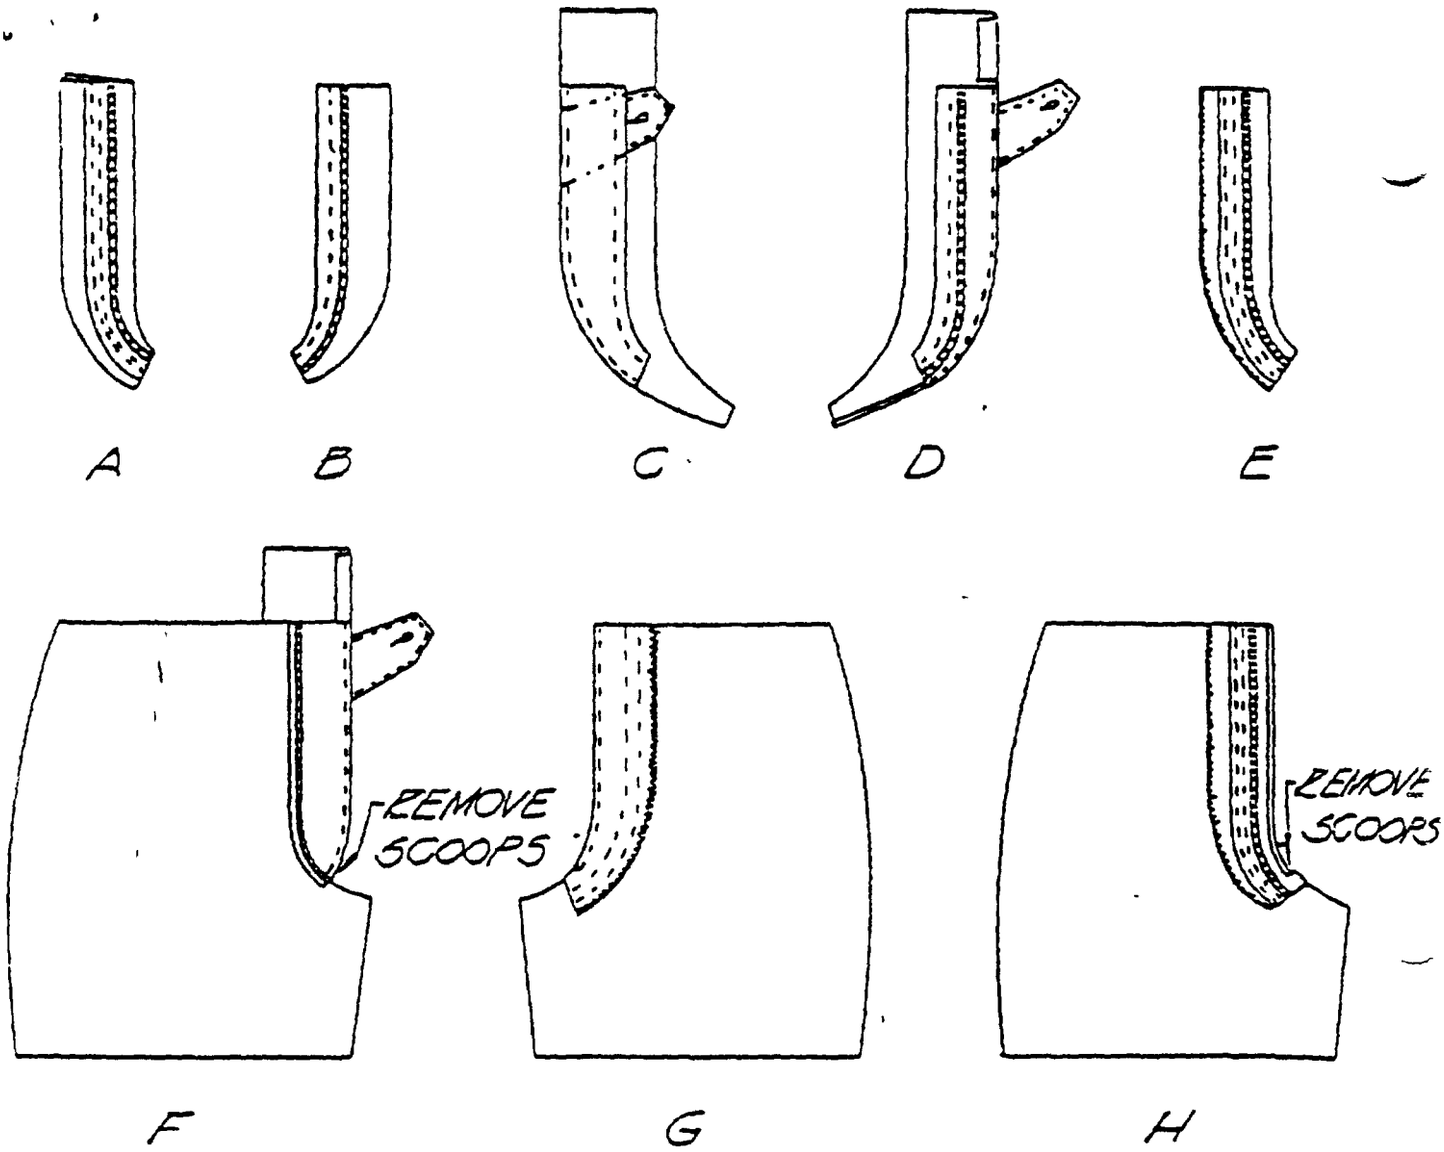



FIG 3. FLY (RIGHT WITH SEPARATE TAB, AND LEFT)

A - DOUBLE STITCH FASTENER TAPE TO LEFT FLY THROUGH LINING.
B - SEAM FASTENER TAPE TO RIGHT FLY.
C & D - SEAM LINING TO RIGHT FLY, TURN AND RAISE STITCH
E - OVEREDGE LEFT FLY
F - JOIN RIGHT FLY TO TROUSERS
H - JOIN LEFT FLY TO TROUSERS AND PRESS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

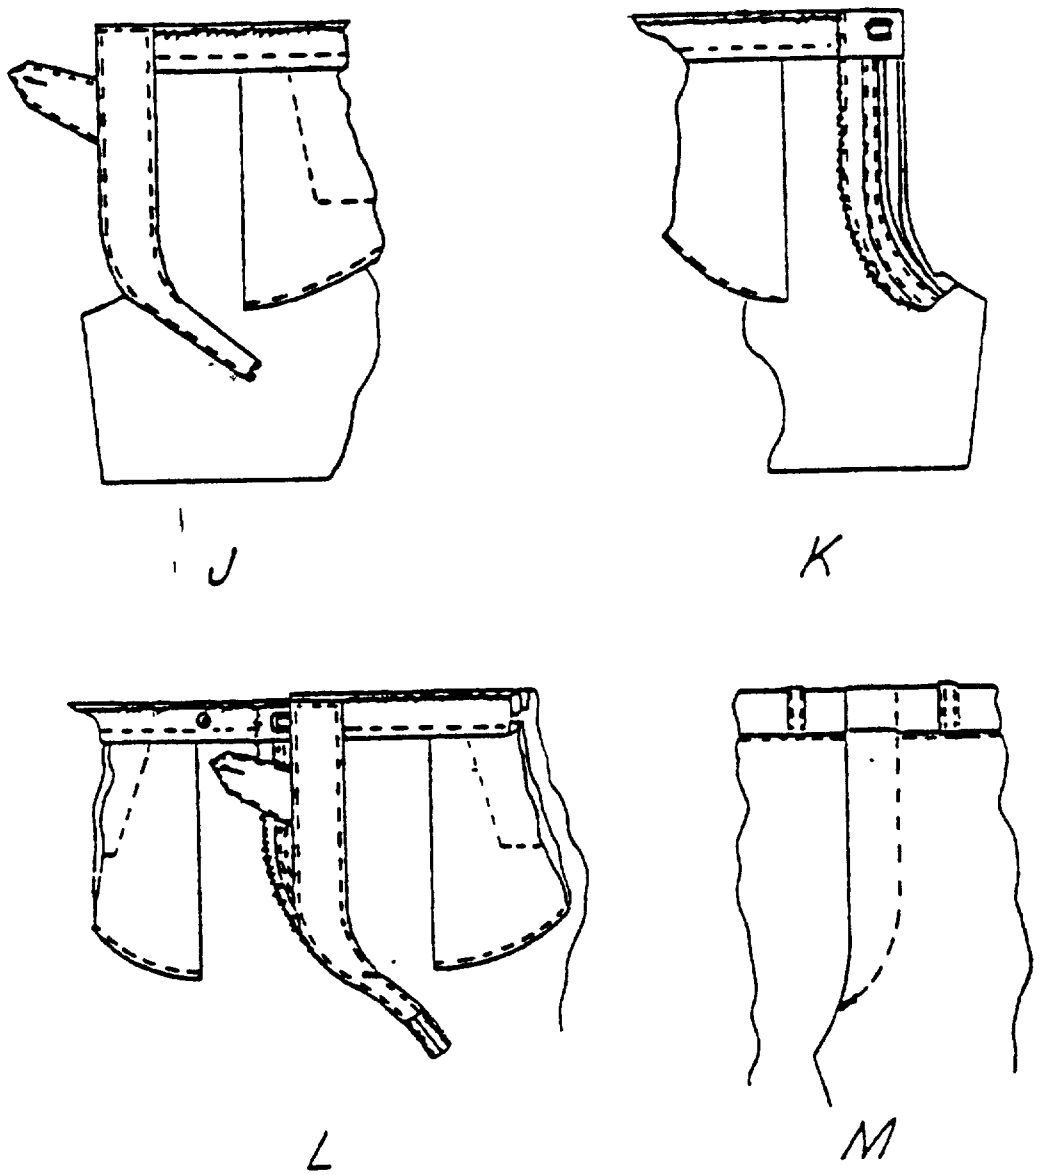



FIGURE 4 FLY (RIGHT WITH SEPARATE TAB, AND LEFT)

J - RAISE STITCH RIGHT FLY CATCHING LINING
K - RAISE STITCH BACK EDGE OF LEFT FLY THROUGH TROUSER
L - FINISH END OF RIGHT FLY LINING
M - BARTACK BASE OF FINISHED FLY



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

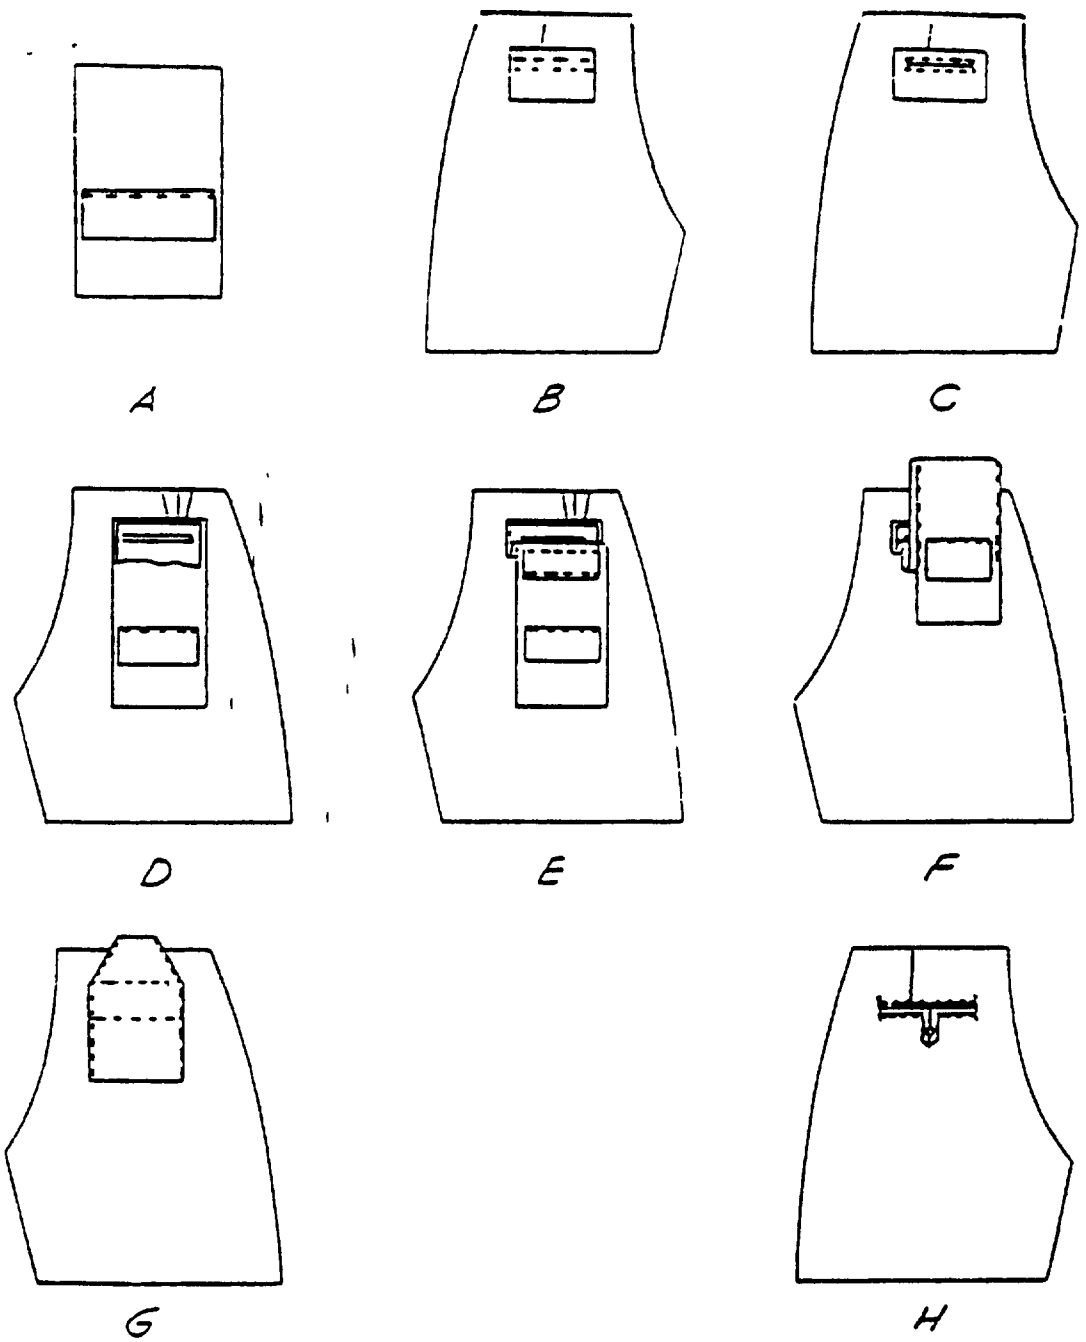



FIG. 5 HIP POCKET

A-BEARER ON POCKET
B-CORD FACING PIECE ON OUTSIDE OF TROUSERS
C-CUT THROUGH CORD PIECE AND NOTCH
D-CORD PIECE TURNED INSIDE
E-MAKE CORD
F-POCKET PULLED THROUGH AND CLOSED
G-POCKET PULLED THROUGH TO INSIDE & TOP STITCHED ON SIDES

H-TOP POCKET OPENING STITCHED THROUGH POCKET AND FACING PIECE WITH BUTTONHOLE TAB INSERTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:14Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-T-44291 | Trousers, Man's: Hospital Duty Uniform (HDU) |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 1426

Source: https://assist.dla.mil -- Downloaded: 2020-10-22T01:14Z
Check the source to verify that this is the current version before use.