MIL-L- 81174/3
7 December 1964


MILITARY SPECIFICATION SHEET

LIGHT, LANDING, AIRCRAFT, RETRACTABLE (PAR 46 LAMP)

THE COMPLETE REQUIREMENTS FOR PROCURING THE LIGHT DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE ISSUE IN EFFECT OF MIL-L-81174

FSC 6220


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:03Z
Check the source to verify that this is the current version before use.

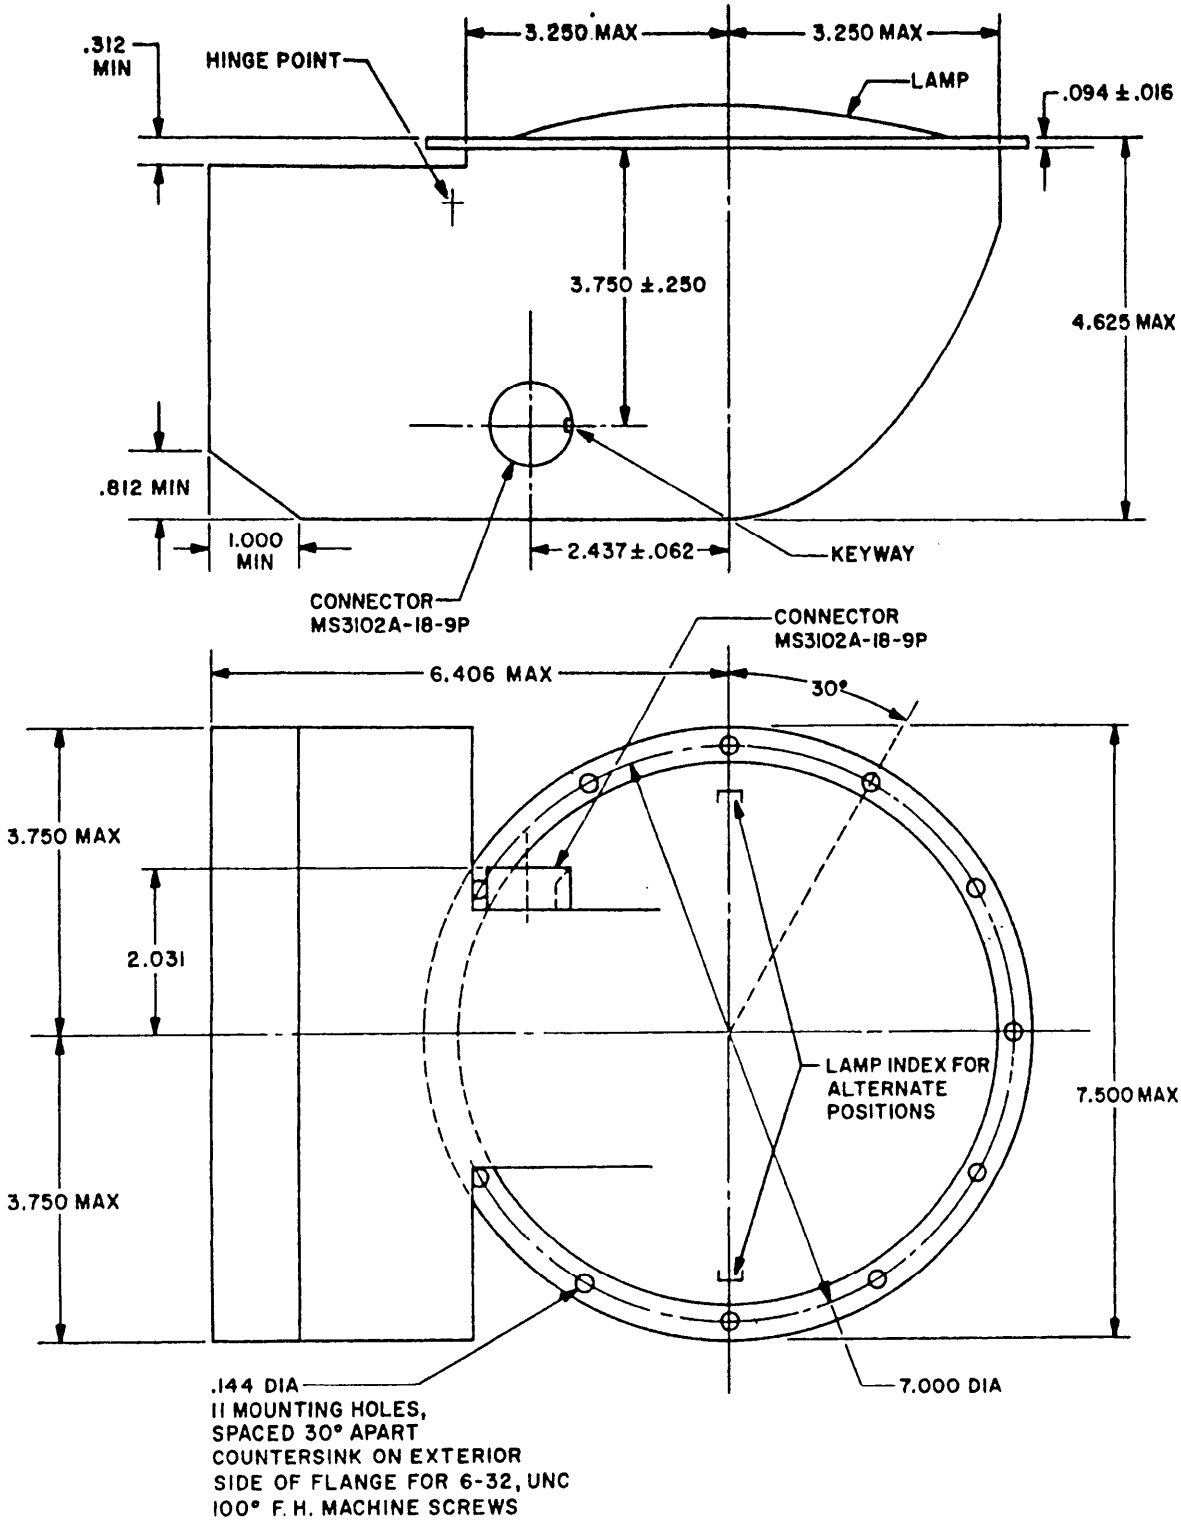

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .031, ANGLES ± 0° 10 MINUTES.

Figure 1 - Aircraft Landing Light

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:03Z
Check the source to verify that this is the current version before use.

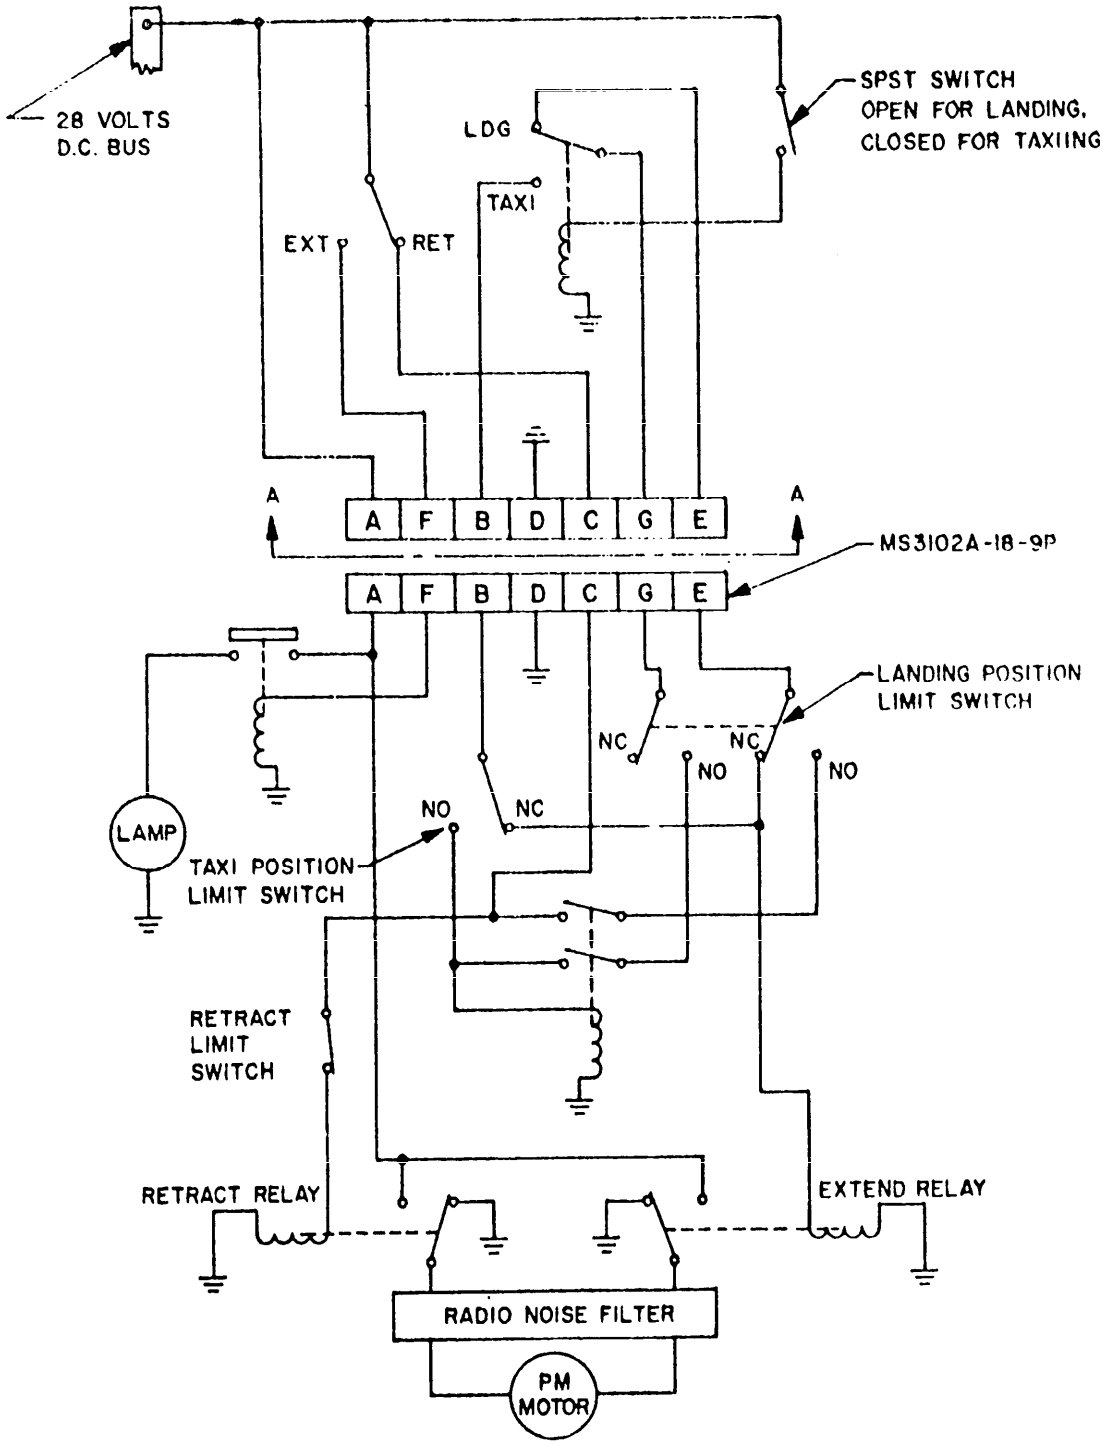

NOTE:

1. PORTION ABOVE A-A IS REPRESENTATIVE OF AIRCRAFT INTERNAL WIRING AND IS NOT PART OF LIGHT ASSEMBLY; BELOW A-A IS TYPICAL, AND MAY BE VARIED PROVIDED ALL OPERATIONAL REQUIREMENTS ARE MET.

Figure 2 - Type LTU-1/A, Part No. M81174/3-1, Circuit Diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Extended positions: A landing position and a taxiing position, each adjustable over the range from 50° to 90° This adjustment shall be readily accomplished without disassembly of the light and without removing the light from the aircraft. Unless otherwise specified by the procuring activity, the lights shall be set to 90° for the taxiing position and 80° for landing position for shipment and testing.

Tolerances: Extended angles shall be within ±1° for the landing and taxiing positions.

Braking: Within plus or minur 2 degress under an air load of 30 pounds.

Lamp: The light shall accommodate a PAR 46, screw terminal base lamp designed for use on 28-volt aircraft circuits and rates up to 450 watts.

Wiring: See Figure 2 for Type LTU-1/A, Part No. M81174/3-1 Circuit Diagram.

Weight: 8 pounds maximum including lamp.

Extension time from the fully retracted position to the fully extended position shall be 15 seconds maximum with a 30 pound air load applied.

Stowage time from the fully extended position to the fully retracted position shall be 15 seconds maximum with a 30 pound air load supplied.

Part number: M81174/3-1.

Supersession data: This specification sheet in conjunction with MIL-L-81174 supersedes MIL-L-25947.

Custodians:

Navy - WP
Air Force - 82
Army - MO

Preparing Activity:

Navy - WP
Project No. 6220-0071

Review Activities:

Navy - WP
Air Force - 82
Army - MO

User Activities:

Navy - MC, CG
Air Force -
Army -

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:03Z
Check the source to verify that this is the current version before use.

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft, circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:03Z
Check the source to verify that this is the current version before use.