INCH-POUND

MIL-PRF-64266/1B
w/AMENDMENT 2
17 June 2019
SUPERSEDING
MIL-PRF-64266/1B
w/AMENDMENT 1
2 December 2014

PERFORMANCE SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, FIBER OPTIC, CIRCULAR, MULTIPLE REMOVABLE GENDERLESS TERMINI, SCREW THREADS, WALL MOUNTING, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring fiber optic connectors described herein shall consist of this specification sheet and MIL-PRF-64266.

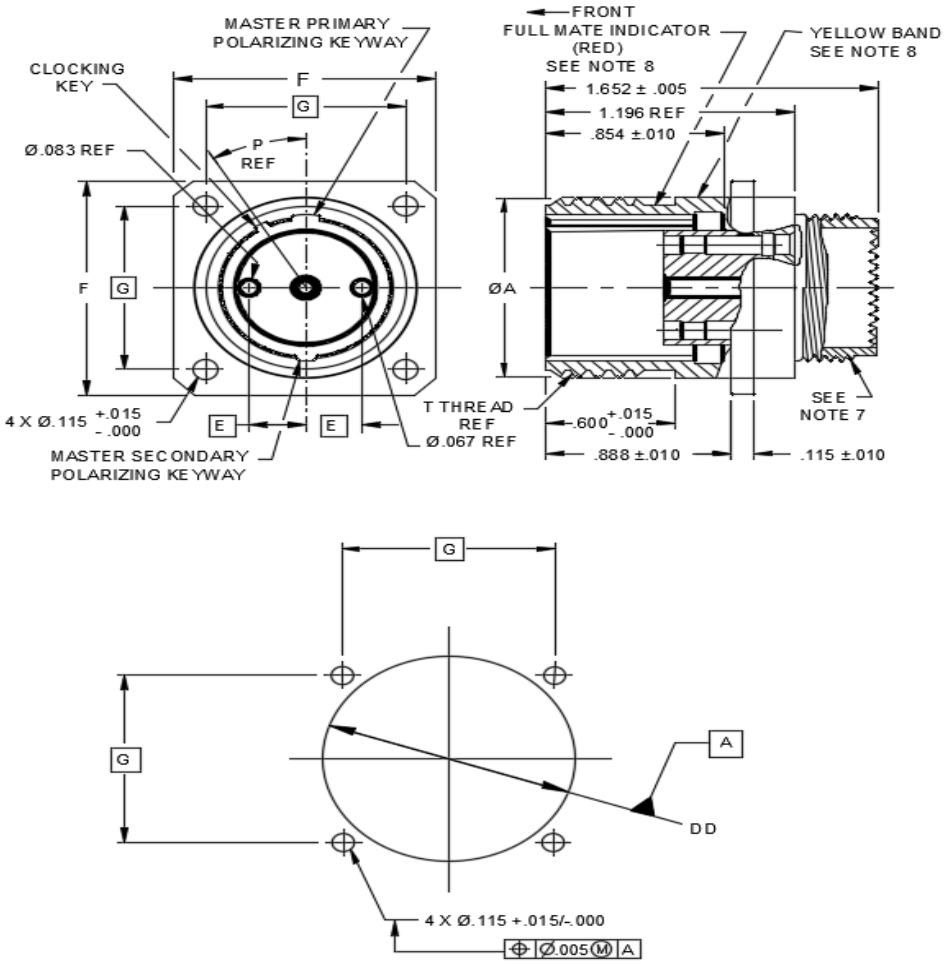


FIGURE 1. Wall mounting receptacle connector.

AMSC N/A

FSC 6060

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:18Z
Check the source to verify that this is the current version before use.

Inches	mm
.010	.25
.015	.38
.067	1.70
.083	2.11
.115	2.92
.620	15.75
.854	21.69
.888	22.56
1.196	30.38

Shell size	A	DD +/- .005	E	F +/- .015	G	P° REF	T thread Class 2A blunt start
11	.750 (19.05)	.812 (20.62)	.140 (3.56)	1.023 (25.98)	.750 (19.05)	See Fig A-3	.7500-.1P-.2L-DS
13	.875 (22.26)	.937 (23.80)	.178 (4.52)	1.138 (28.91)	.843 (21.41)	See Fig A-3	.8750-.1P-.2L-DS
15	1.062 (26.98)	1.124 (28.55)	.270 (6.86)	1.258 (31.95)	.968 (24.59)	See Fig A-3	1.062-.1P-.2L-DS
23	1.500 (38.1)	1.562 (39.68)	.400 (10.16)	1.718 (43.64)	1.281 (32.54)	See Fig A-3	1.5000-.1P-.2L-DS

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. Dimensions apply to plated/finished part.
5. Mating key positions and dimensions are shown on figure A-3 of MIL-PRF-64266.
6. Connector receptacle interface dimensions shall be in accordance with MIL-PRF-64266, figure A-2.
7. Back end connector design for attachment of non-rotatable backshell. Connector backshell accessory interface shall be in accordance with MIL-PRF-64266, figure A-6.
8. Marking, color and coverage requirements for the visual full mate indicator shall conform to 3.5.1.2 of MIL-PRF-64266. Dimension criteria for full mate indicator are shown in appendix A, figure A-2 of MIL-PRF-64266. Marking and color requirements for the yellow band shall be in accordance with 3.10.3.1 of MIL-PRF-64266.
9. Insert retention mechanism not shown.
10. For connector insert arrangements and interface dimensions, see appendix B, figures B-1 through B-6 of MIL-PRF-64266.

FIGURE 1. Wall mounting receptacle connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and keying configurations: See figure 1 and MIL-PRF-64266 appendix A, figure A-2, A-3, A-5 and A-6.

Weight (without termini): See table I.

TABLE I. Weight (without termini).

Shell size	Weight, max.	
	ounces	grams
11	2.0	56.7
13	2.5	70.875
15	3.0	85.05
23	4.3	121.905

Protective caps: Each connector shall be supplied with protective caps over the front and rear portions of the connector.

Insert arrangement: See appendix B of MIL-PRF-64266 for desired shell size. Insert shall be marked with the identification numbers of the insert cavity positions on both the front and rear faces.

Termini: Genderless. See MIL-PRF-29504/18. For dummy terminus, see MIL-PRF-29504/19. For keyed terminus, see MIL-PRF-29504/20.

Alignment Sleeve retainer (ASR): A MIL-PRF-64266/9 ASR shall be installed in the receptacle as part of this PIN.

Cleaning procedures: Each shipment of connectors shall include recommended cleaning procedures. The following wording or equivalent is recommended: "To clean, use lint free wipe dampened with alcohol and blow dry with air".

Shell polarization: 1 through 12 keyway positions. See MIL-PRF-64266 appendix A, figure A-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:18Z
Check the source to verify that this is the current version before use.

Marking:

Part or Identifying Number (PIN): Mark on flange of connector receptacle (see tables II and III).

M 64266/ - 1 X X X X X X

M prefix

Specification number

Connector specification sheet

Shell size designator (see table II)

Class
A = Aluminum with conductive plating (see 3.3.2).
B = CRES, passivated (see 3.3.2).
C = Composite with conductive plating (see 3.3.2).
D = Aluminum with non-conductive finish
E = Composite with no or non-conductive finish

Shell keying position (see table A-II).

Insert arrangement number (see table II).

Temperature range designator (see 1.2.1.b)
1 = Temperature range 1
2 = Temperature range 2

ASR type designator (see table III)

PIN Example: M64266/1-BA212

NOTE: Shell size designators in MIL-PRF-64266 conform to those in MIL-DTL-38999 connector (Shell size 11 =B, shell size 13 = C, shell size 15 = D, shell size 23 = H). The shell size designators are not consistent with those in MIL-DTL-28840 or in MIL-PRF-28876 connectors (Shell size 11 =A, shell size 13 = B, shell size 15 = C, shell size 23 = F). Care should be taken when specifying the PIN for those use to specifying the PIN for MIL-DTL-28840 and MIL-PRF-28876 connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:18Z
Check the source to verify that this is the current version before use.

TABLE II. PIN designators.

Shell size	Shell size designator	Number of insert cavities	Insert arrangement number 1/
11	B	2	1
		4	2
13	C	6	1
		4 2/	2
15	D	8	1
		10	2
23	H	36	1
		18	2

Notes:
1/ Insert arrangement number are found in Appendix B of MIL-PRF-64266.
2/ Shell size 13 connector with four cavity insert may be used for MIL-PRF-28876 retrofit applications for temperature range 1 shipboard applications.

Table III. ASR determined by terminus type.

ASR type designator	Applicable termini	ASR color (Class D)
F	MIL-PRF-29504/18 MIL-PRF-29504/20	Blue
L	Lens termini	Red

Mating counterpart: Plug connectors specified in MIL-PRF-64266/2.

Installation and removal tools: Tools shall be as specified in 3.5.4.2.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-64266, this specification sheet references the following documents:

MIL-DTL-28840	MIL-DTL-38999
MIL-PRF-29504/18	MIL-PRF-29504/19
MIL-PRF-29504/20	MIL-PRF-64266/9
MIL-PRF-64266/2	MIL-PRF-28876

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:18Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy – SH
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 6060-2018-007)

Review activities:
Army - MI
Navy - AS
Air Force - 13 19, 93
NASA - NA

NOTE: The activities listed above were interested in this document on the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:18Z
Check the source to verify that this is the current version before use.