INCH-POUND


MIL-B-49430/4C(ER)
24 December 1992
SUPERSEDING
MIL-B-49430/4B(ER)
1 August 1991

MILITARY SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, LITHIUM SULFUR DIOXIDE BA-5567/U

This specification sheet is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-49430(ER).

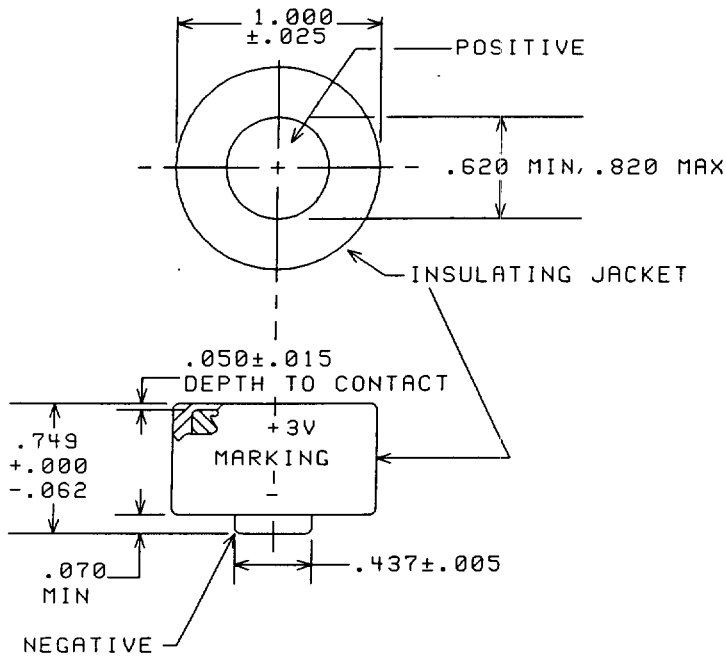

NOTE: ALL DIMENSIONS ARE IN INCHES.

Figure 1. Battery dimensions and terminal markings.

AMSC N/A FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See Figure 1.

Maximum voltage: 3.05 volts.

Minimum voltage (for capacity): 2.00 volts.

Terminals: See Figure 1.

Weight (maximum): 0.7 ounces (20 grams)

Fuse: No fuse is required.

High temperature switch. Not required.

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

Capacity Tests	Battery Capacity in Hours to 2.00 Volts
I	18
L	10
H	18
HT	16
LT	8
T	17
D	17

Initial voltage delay: When the battery is subjected to the I, H, HT, T, and D capacity tests, initial closed-circuit voltages below 2.00 volts cannot exceed a 5.0 second duration. For the L and LT capacity tests initial closed-circuit voltages below 2.00 volts cannot exceed a 10.0 second duration.

Negative Terminal Insulation: The negative terminal shall be electrically insulated from a flat surface placed against the side of the battery (the 0.749 inch dimension) even when the battery is not parallel to the surface. This insulation requirement shall be demonstrated during First Article testing on ten samples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

METHOD OF EXAMINATION AND TESTS:

Capacity tests:

(1) Storage: Details on storage conditions for all specified capacity tests are described in basic specification.

(2) Discharge: Discharge current shall be 50-ma constant current.

Closed-circuit voltage: Load resistance of 20 ohms shall be used. Voltage shall be above two volts within five seconds.

Negative Terminal Insulation: When a ten pound force is applied to the battery (the 0.749 inch dimension), no electrical contact shall be made even if the maximum angle between the battery surface and the contact surface is 15°. The contact surface to be used in the test shall be a flat iron or steel plate measuring 3/4" x 3/4". Its thickness shall be 1/8". These dimensions are all minimums.

The lack of electrical contact shall be demonstrated with a voltmeter set so that 3V is readily evident. During the test, one terminal of the voltmeter shall be attached to the positive terminal of the battery and the other terminal of the voltmeter attached to the reverse side of the contact surface. Zero volts shall be read.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Army - ER

Preparing Activity:
Army - ER

(Project 6135-A253)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.