INCH-POUND

MIL-B-49458/1B(ER)
13 November 1992

SUPERSEDING
MIL-B-49458/1A(ER)
21 February 1992

MILITARY SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, LITHIUM MANGANESE DIOXIDE, BA-5372/U

This specification sheet is approved for use by the Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-B-49458(ER).

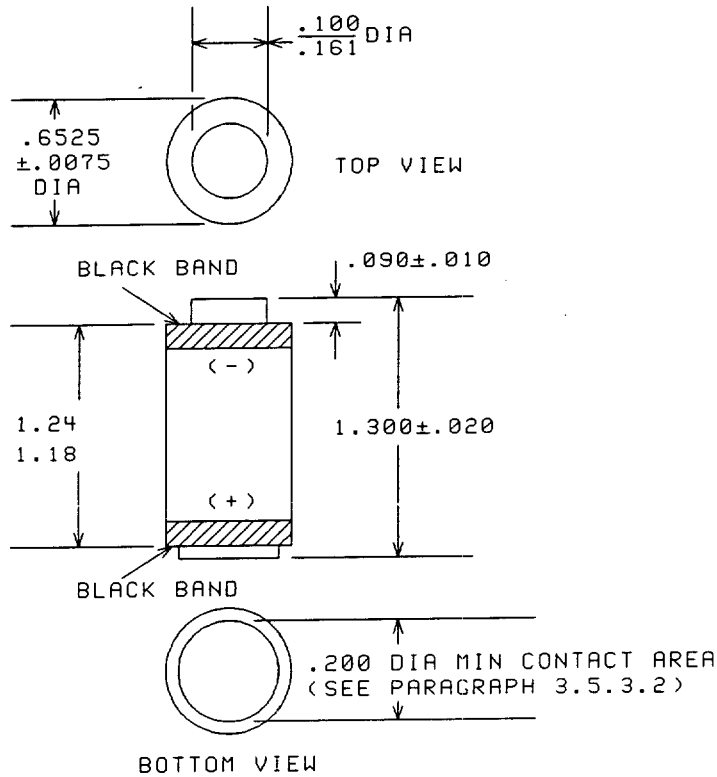


FIGURE 1. DIMENSIONS AND CONFIGURATION.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Terminals are flat contact type.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Maximum voltage: 6.80 volts under 1250 ohms.

Minimum voltage (for capacity): 4.0 volts.

Terminals: See figure 1.

Weight (maximum): 0.7 ounces (20 grams).

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

Capacity Test	Battery Capacity in hours to 4.0 volts
I	100
L	75
H	100
HT	95
LT	60
T	95
D	95
ILR	1000

Initial voltage delay: When the battery is subjected to any of the capacity tests, initial closed-circuit voltages below 4.0 volts cannot exceed a 0.1 second duration.

METHOD OF EXAMINATION AND TESTS:

Capacity Tests:

(1) Storage: Details on storage conditions for all specified capacity tests are described in basic specification.

(2) Discharge: Batteries: Discharge test shall be through a fixed resistance of 1250 ohms for all tests except the ILR test which shall use a fixed resistance of 15,000 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:08Z
Check the source to verify that this is the current version before use.

Closed circuit voltage test:

Battery: Load resistance of 298.2 ohms shall be used. Voltage shall be above 5.0 volts.

Special marking: The following information shall be marked on each unit package:

TO TEST THIS BATTERY WITH TS-183( ) /U

USE JACK NR.	MINIMUM PERMISSIBLE VOLTAGE
12	5.0 volts

NOTE 1: Two circumferential black bands shown on Figure 1 satisfy the requirement of paragraph 3.14.2, Special Marking. The term "LITHIUM BATTERY" is not required.

Vent test - All batteries shall be placed at +167°F, -3°F, +5°F, for two hours. At the end of the two hours the battery shall be weighed and observed to determine if a cell vented. If any cell has vented, the battery shall be considered to have failed this test. If no cell has vented, the ambient temperature shall be raised to 375°F, -5°F. Batteries shall be maintained at this temperature for two hours. All cells shall have vented at the designated cell vent after the two hour 375°F, -5°F, storage based on observation. Batteries containing cells which exploded or did not vent are considered failures. Distortion of labeling or dimensions is permitted.

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodian:
Army - ER

Preparing Activity
Army - ER

(Project 6135-A252)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:08Z
Check the source to verify that this is the current version before use.