INCH-POUND


MIL-DTL-55074/2B
w/AMENDMENT 1
06 October 2018
SUPERSEDING
MIL-DTL-55074/2B
12 August 2003

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, TELEPHONE, ELECTRICAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-55074.

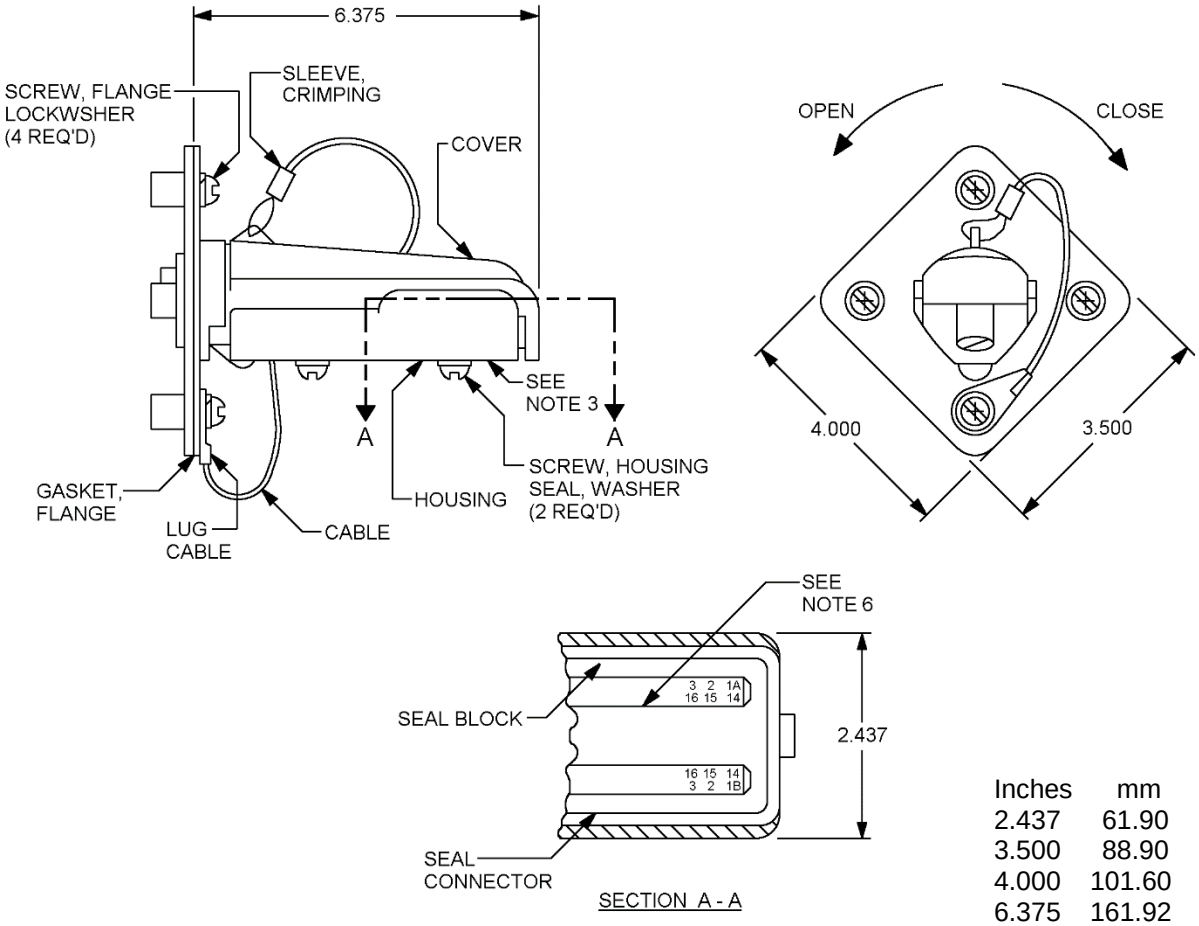


Inches	mm
2.437	61.90
3.500	88.90
4.000	101.60
6.375	161.92

FIGURE 1. Connector receptacle.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

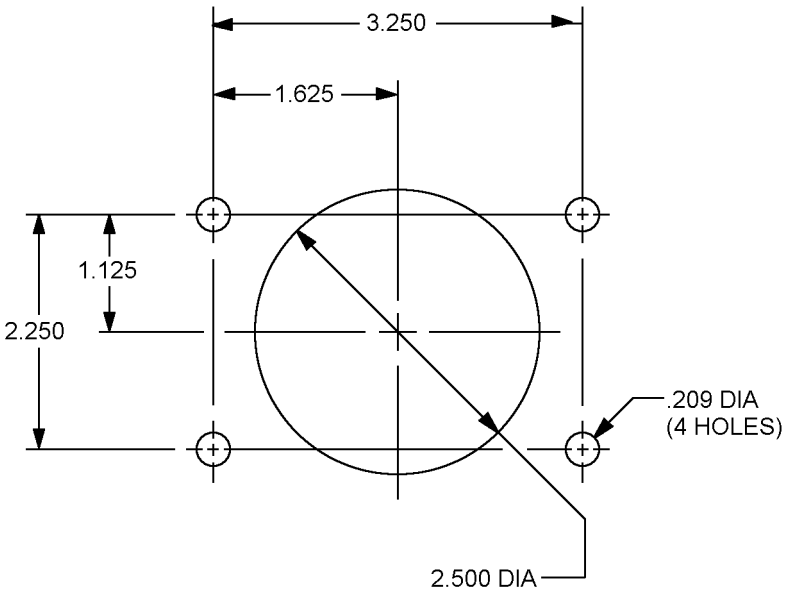

CONNECTOR MOUNTING HOLE PATTERN

Inches	mm
.209	5.31
1.125	28.58
1.625	41.28
2.250	57.15
2.500	63.50
3.250	82.55

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerance is ± .015 inch (.38 mm).
3. Marking to appear in area shown. Marking to consist of manufacturer's name or CAGE code, CONN. RECP. ELEC., U-186C/G (M55074/2), molded in characters approximately .187 inch (4.75mm) high.
4. This connector mates with MIL-DTL-55074/1 (U-185B/G).
5. Turning connector to left unlocks cover for mating; turning to right locks cover. (See applicable end view, page 1).
6. See MIL-DTL-55074/4 for contact assembly specifications.
7. M55074/2 represents U-186C/G where applicable in MIL-DTL-55074.
8. Connector shall be manufactured in accordance with drawing number SC-DL-349780.
9. Connector must conform to the interchangeability requirements of gage number SC-GL-323023.

FIGURE 1. Connector receptacle – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material:

Housing – Aluminum, commercial alloy 380 in accordance with SAE-AMS-QQ-A-591, finish in accordance with MIL-DTL-14072.

Cover – Aluminum, commercial alloy 380 in accordance with SAE-AMS-QQ-A-591, finish in accordance with MIL-DTL-14072.

Seal, block – Low temperature neoprene, M3BA507F19 in accordance with ASTM-D2000, or equivalent.

Seal, connector – Silicone rubber, class 2B, grade 40, in accordance with A-A-59588.

Seal, washer – Stat-O-seal, aluminum 7375-T6 (anodized) in accordance with SAE-AMS-QQ-A-250/12, rubber in accordance with MIL-PRF-6855, class 1, 2 or 3.

Cable – 7 wires (.010) stranded to .032 diameter in accordance with ASTM A580/A580M. (9 inch cut length).

Screw, housing – MS51957-30, #6-32 x .500 lg pan head, slotted.

Screw, flange – Pan head, slotted, #10-32NF-2A x .500 lg.

Lockwasher – MS35338-138 or MS35338-157 in accordance with NASM35338.

Sleeve, crimping – Copper, zinc plated.

Gasket, flange – Neoprene.

Lug, cable – Copper, cadmium plated.

Part or Identifying Number (PIN): M55074/2-01.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-55074, this document references the following:

MIL-PRF-6855
MIL-DTL-14072
MIL-DTL-55074/1
MIL-DTL-55074/4
MS51957
A-A-59588
ASTM-A580/A580M
ASTM-D2000
NASM35338
SAE-AMS-QQ-A-250/12
SAE-AMS-QQ-A-591
SC-DL-349780
SC-GL-323023

CONCLUDING MATERIAL

Custodians:
Army - CR
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2018-133)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.