INCH-POUND
MIL-C-55302/131B
1 May 1992
SUPERSEDING
MIL-C-55302/131A
9 April 1986

MILITARY SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RIGHT ANGLE, PIN CONTACTS, 64 OR 96 CONTACT POSITION FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-55302


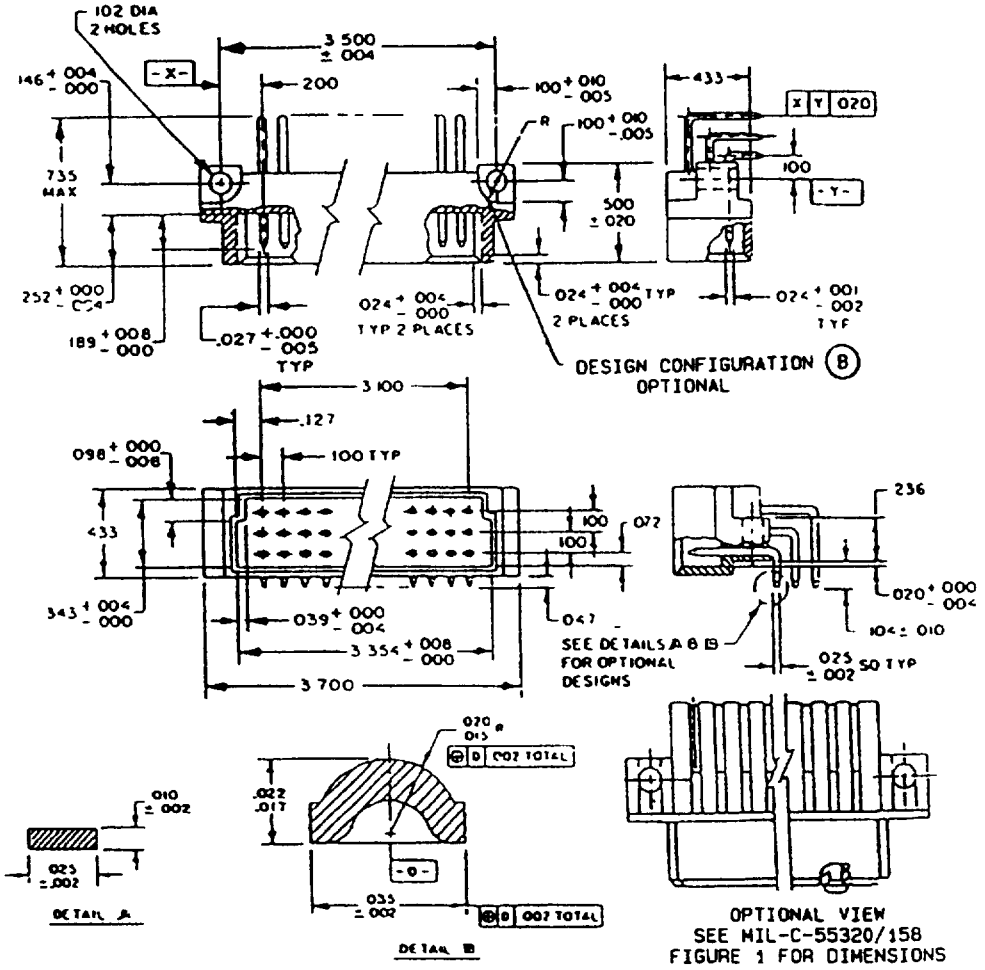


FIGURE 1 Connector, plug, 100 (2 54 mm) spacing


(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release Distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

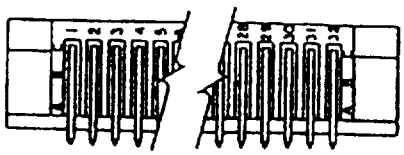

VIEW FROM TERMINATION END
CONNECTOR MARKING

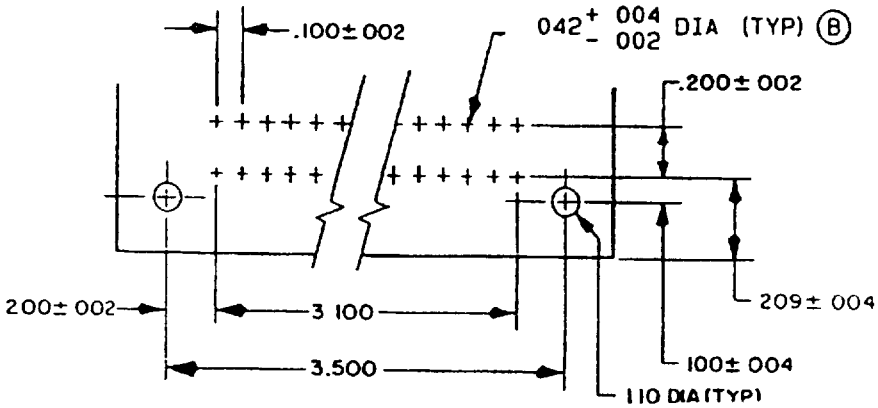

RECOMMENDED MOUNTING PATTERN 64 CONTACTS

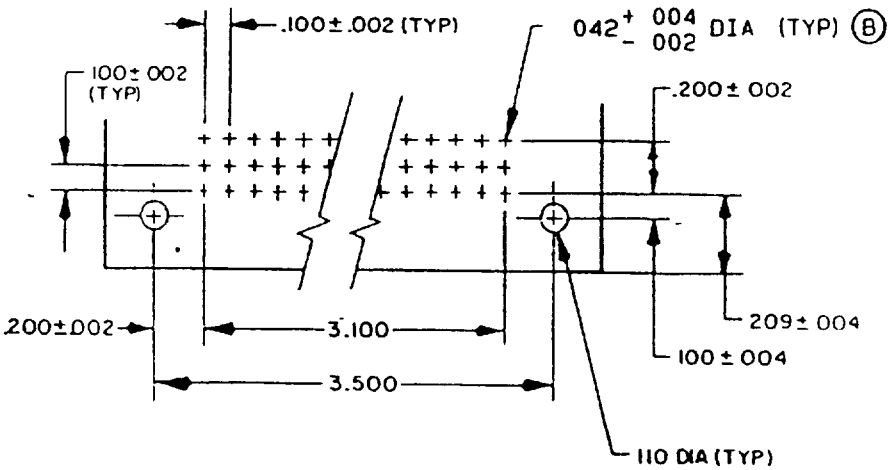

RECOMMENDED MOUNTING PATTERN 96 CONTACTS

FIGURE 1 Connector, plug, .100 (2.54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN)	Number of Contacts	Type of termination
M55302/131-01	96	Printed circuit tails
M55302/131-02	64	Printed circuit tails

NOTE. PIN -02 connectors have the middle row (row B) of contacts excluded.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
001	0 03	024	0 61	.102	2.59	.343	8 71
.002	0 05	.025	0.64	.104	2.64	.433	11 00
004	0 10	.027	0 69	110	2.79	.500	12.70
.005	0 13	.035	0 89	127	3.23	735	18.67
.008	0.20	039	0 99	146	3.71	3.100	78.74
010	0.25	.040	1 02	189	4.80	3.354	85.19
015	0 38	.047	1.19	.200	5.08	3 500	88.90
017	0 43	.070	1 78	209	5 31	3 700	93.98
020	0 51	.098	2.49	236	5 99		
.022	0 56	.100	2 54	.252	6 40		

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm)
4. These connectors mate with connectors specified in MIL-C-55302/132

FIGURE 1. Connector, plug, .100 (2.54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration. See figure 1.

Plating:

(B) Contact plating. The plating in the engagement area for .170 inch minimum length from the tip of the contact shall be gold in accordance with MIL-G-45204, type II, grade C or D, class I, over nickel plating in accordance with QQ-N-290, class 2, 30 to 150 microinches. The plating on the contact termination end for .170 inch minimum length from the end of the contact shall be tin lead in accordance with MIL-C-55302

(B) Nonfunctional areas Any portion of the contact other than the contact mating area or termination area can be plated in accordance with MIL-C-55302.

Contact identification: See figure 1.

Contact separation forces:

(B) Mating and unmating. The maximum mating force, in pounds, shall not exceed a value equal to .25 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .025 times the number of contacts and shall exceed the measured insertion force, when the housing is loaded with contacts and mating with connector specified in MIL-C-55302/134

Contact rating 3 amperes maximum per contact

Contact resistance No individual contact pair shall have a resistance exceeded .020 ohm

Contact retention: 3 pounds minimum per contact.

Dielectric withstanding voltage

Sea level: 1,000 volts rms, 50 or 60 hertz.

High altitude: 300 volts rms, 50 or 60 hertz

Oversize pin exclusion Not applicable

PIN See figure 1

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3796-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.