INCH-POUND
MIL-PRF-55182/6P
26 September 2002
SUPERSEDING
MIL-PRF-55182/6N
9 June 1997

PERFORMANCE SPECIFICATION

* RESISTORS, FIXED, FILM, NONESTABLISHED RELIABILITY,
ESTABLISHED RELIABILITY, AND SPACE LEVEL, STYLE RN*70 1/

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers the associated requirements for style RN*70 1/, nonestablished reliability, established reliability, and space level, film, fixed resistors.

* 1.2 Part or Identifying Number (PIN). Resistors covered by this specification are identified by a PIN which is derived in accordance with MIL-PRF-55182 and is in the following form:

RN*70 1/	C1001FS
Style and Termination type	Coded number

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE


MIL-PRF-55182 - Resistors, Fixed, Film, Nonestablished Reliability, Established Reliability, and Space Level, General Specification for.

1/ Third letter is variable, dependent upon lead material or capability.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Communications - Electronics Command and Fort Monmouth, ATTN: AMSEL-LC-LEO-E-EP, Fort Monmouth, NJ 07703-5023 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:36Z
Check the source to verify that this is the current version before use.

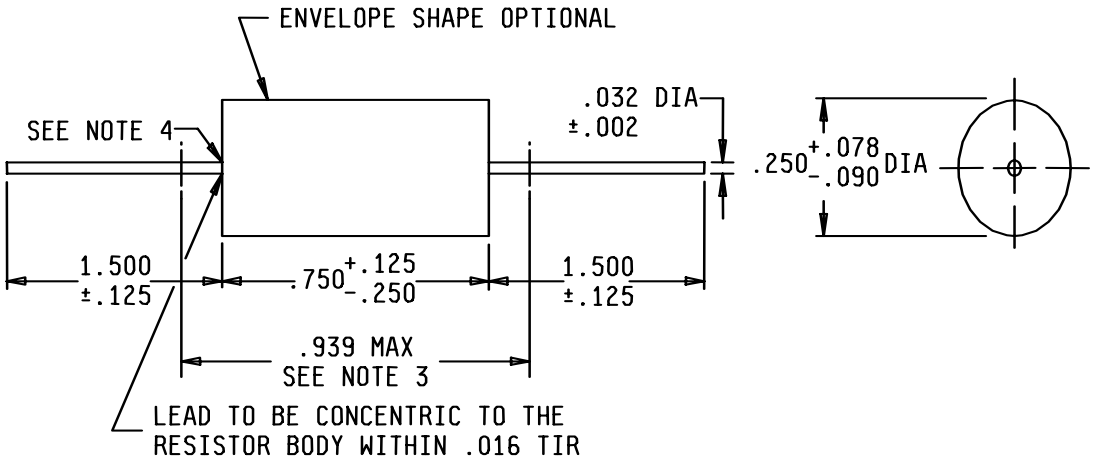

Inches	mm	Inches	mm	Inches	mm
0.002	0.05	0.090	2.29	0.939	23.85
0.016	0.41	0.125	3.18	1.500	38.10
0.032	0.81	0.250	6.35		
0.078	1.98	0.750	19.05		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The maximum length is "clean lead" to "clean lead".
4. The end of the body shall be that point at which the body diameter equals the nearest drill size larger than 250 percent of the nominal lead diameter.
5. Lead length for new design and tape and reel packaging shall be 1.00 inch +.625 inch, -.00 inch (25.4 mm +15.80 mm, -0.00 mm).
6. Lead concentric tolerance is to be measured at the point of lead egress from the resistor body.

* FIGURE 1. Style RN*70 resistors. 1/

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Document Automation and Production Service, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The requirements for acquiring the product described herein shall consist of this document and MIL-PRF-55182.

* 1/ Third letter is variable, dependent upon lead material or capability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:36Z
Check the source to verify that this is the current version before use.

*

3.2 Interface and physical dimensions. Resistors shall meet the interface and physical dimensions specified on figure 1.

* 3.2.1 Characteristic. Style RN*70 1/ is available in characteristic C, characteristic E, characteristic H, characteristic J, and characteristic K.

3.2.2 Terminal types. Terminal RNC is inactive for new design when specified with characteristics C and E. Terminal RNR is inactive for new design with when specified with characteristics H, J, and K.

3.3 Power rating. The power rating shall be 0.50 watt (see 6.3).

3.4 Voltage rating. The continuous working voltage shall not exceed 350 volts.

3.5 Resistance. Minimum and maximum resistance values shall be as specified in table I.

TABLE I. Minimum and maximum resistance values.

Minimum resistance		Maximum resistance	
Characteristic	Ohms	Characteristic	Megohms
H 1/	1.0	H	15.0
J 1/	1.0	J	15.0
K 1/	1.0	K	15.0
C	20.0	C	7.5
E	20.0	E	7.5

1/ For resistance tolerance D and resistance tolerance F only. For resistance tolerance B, the minimum resistance value shall be 10.0 ohms.

3.6 Voltage coefficient (applicable to resistors of 1,000 ohms and above). The voltage coefficient shall not exceed ±0.005 percent per volt.

4. VERIFICATION

4.1 Verification. Verification shall be in accordance with MIL-PRF-55182.

5. PACKAGING

5.1 Packaging requirements. For acquisition purposes, the packaging requirements shall be as specified in the contract or order. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

* 1/ Third letter is variable, dependent upon lead material or capability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:36Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-55182 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1).

* c. Packaging requirements (see 5.1). (i.e. Electrostatic discharge (ESD) sensitive packaging).

6.3 Power rating at 70°C. The power rating at 70°C for 2,000 hours of life test has been established at 0.75 watt, 500 volts maximum voltage. It should be noted that the failure rate level is established at the condition of 125°C, .50 watt and 10,000-hour duration.

* 6.4 Electrostatic charge. Under several combinations of conditions, these resistors can be electrically damaged, by electrostatic charges, and drift from specified value. Users should consider this phenomena when ordering or shipping resistors. Direct shipment to the Government is controlled by MIL-DTL-39032 which specifies a preventive packaging procedure.

* 6.5 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
* Air Force - 11
NASA - NA

Review activities:
Army - AR
Navy - AS, CG, MC, OS
* Air Force - 19, 99

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5905-1677-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.
   NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-55182/6P	**2. DOCUMENT DATE (YYMMDD)** 26 September 2002

3. DOCUMENT TITLE: RESISTORS, FIXED, FILM, NONESTABLISHED RELIABILITY, ESTABLISHED RELIABILITY, AND SPACE LEVEL, STYLE RN*70

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Incl Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME US Army Communications-Electronics Command	b. TELEPHONE (Include Area Code) (1) Commercial (732) 532-9104 (2) AUTOVON 992-9104 (3) E-Mail Jeffrey.Carver@mail1.monmouth.army.mil
c. ADDRESS (Include Zip Code) ATTN: AMSEL-LC-LEO-E-EP Fort Monmouth, NJ 07703-5023	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5803 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, FEB 99 (EG) Previous editions are obsolete WHS/DIOR Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:36Z
Check the source to verify that this is the current version before use.