This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

5305

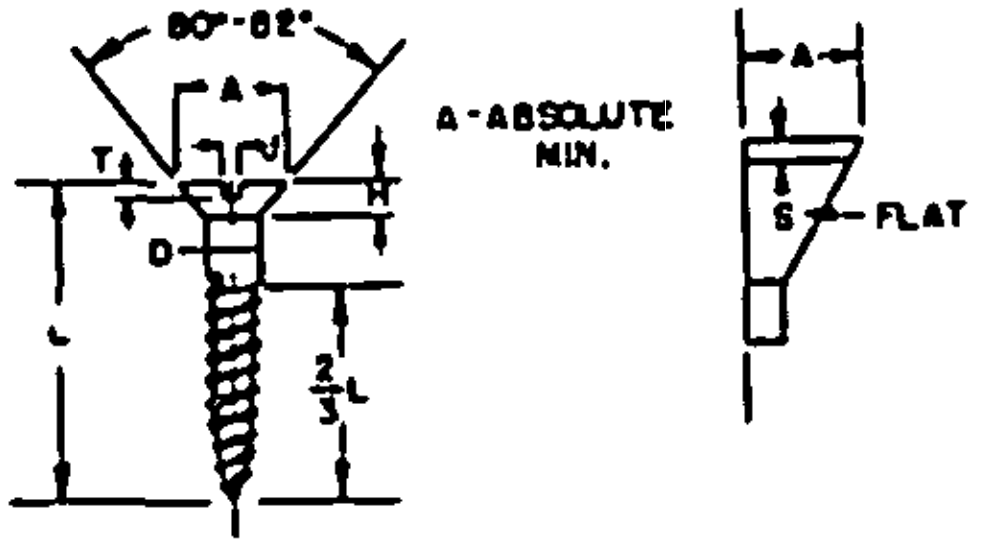

Nominal size		8	10	12	14
Threads per inch		15	13	11	10
(D) Basic diameter	-0.004 -0.007	0.164	0.190	0.216	0.242
(A) Diameter of head	Max. sharp	.332	.385	.438	.491
	Min. sharp	.308	.359	.410	.461
	Absolute min. with flat	.292	.340	.389	.437
(H) Height of head	Max.	.100	.116	.132	.148
	Min.	.084	.099	.112	.127
(J) Width of slot	Max.	.054	.050	.067	.075
	Min.	.045	.050	.056	.064
(T) Depth of slot	Max.	.045	.053	.060	.068
	Min.	.029	.034	.039	.044
(S) Flat on min. screw		.008	.007	.009	.009

(L) Length	Length tolerance	MS part No.	FIIN	MS part No.	FIIN	MS part No.	FIIN	MS part No.	FIIN
1/2	+0 -1/32	1		--		--		--	
5/8		2		--		--		--	
3/4	+0 -3/64	3		12		23		--	
7/8		4		13		24		--	
1		5		14		25		36	
1-1/4		6		15		26		37	
1-1/2		7		16		27		38	
1-3/4	+0 -1/16	8		17		28		39	
2		9		18		29		40	
2-1/4		10		19		30		41	
2-1/2		11		20		31		42	
2-3/4		--		21		32		43	
3	+0 -3/32	--		22		33		44	
3-1/2		--		--		34		45	
4		--		--		35		46	
4-1/2		--		--		--		--	
5		--		--		--		--	

(Project 5303-N012Sh) Ⓐ For changes see sheets 1 and 2

APPROVED 8 MAY 1957 REVISED Ⓐ 19 AUGUST 1966

CUSTODIANS
Ships

OTHER INT.
A -
N -
AF -

PROCUREMENT SPECIFICATION
Ⓐ FF-S-111

MILITARY STANDARD

SCREWS, WOOD, SLOTTED FLAT HEAD 82°, AUSTENITIC, CORROSION-RESISTING STEEL, NONMAGNETIC

SUPERSEDES:

MS16217 (SHIPS)

SHEET 1 OF 2

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP. CLASS
5305

	Nominal size		16	18	20	24
	Threads per inch		9	8	8	7
(D)	Basic diameter	+0.004 -0.007	0.268	0.294	0.320	0.572
(A)	Diameter of head	Max. sharp Min. sharp Absolute min. with flat	.544 .512 .485	.597 .563 .534	.650 .614 .582	.756 .716 .679
(H)	Height of head	Max. Min.	.164 .141	.180 .155	.196 .170	.228 .198
(J)	Width of slot	Max. Min.	.075 .064	.084 .072	.084 .072	.094 .081
(T)	Depth of slot	Max. Min.	.075 .049	.083 .054	.090 .059	.105 .069
(S)	Flat on min. screw		.010	.011	.012	.013

(L) Length	Length tolerance	MS part No.	FIIN	MS part No.	FIIN	MS part No.	FIIN	MS part No.	FIIN
1/2	+0 -1/32	--		--		--		--	
5/8		--		--		--		--	
3/4	+0 -3/64	--		--		--		--	
7/8		--		--		--		--	
1		47		--		--		--	
1-1/4		48		--		--		--	
1-1/2		49		60		71		--	
1-3/4		50		61		72		--	
2	+0 -1/16	51		62		73		--	
2-1/4		52		63		74		--	
2-1/2		53		64		75		--	
2-3/4		54		65		76		--	
3	+0 -3/32	55		66		77		82	
3-1/2		56		67		78		83	
4		57		68		79		84	
4-1/2		58		69		80		85	
5		59		70		81		86	

Material: Austenitic corrosion-resisting steel shall be in accordance with class 302, 303, 304, 305, 310 or 316 of Specification QQ-S-763 or composition FS 302, 304, 310 or 316 of Specification QQ-W-423.
Tensile strength: Tensile strength shall be 70,000 p.s.i. minimum.
Permeability: The magnetic permeability of the screws shall not exceed 2.0 (μ) when measured with a permeability indicator in accordance with Specification MIL-I-17214.
Length of thread: Length of thread shall be approximately 2/3 L.
Dimensions: All dimensions are in inches, unless otherwise specified.
Protective coating: Screws shall be passivated in accordance with QQ-P-35. Ⓐ

Notes:
1. Referenced documents shall be the issue in effect on date of invitation for bids.
2. In case of conflict with any document referenced herein, this standard shall govern.

APPROVED 8 MAY 1957 REVISED Ⓐ For changes see sheets 1 and 2

CUSTODIANS Ships	OTHER INT. A - N - AF -	**MILITARY STANDARD** SCREWS, WOOD, SLOTTED FLAT HEAD 82°, AUSTENITIC, CORROSION-RESISTING STEEL, NONMAGNETIC	**MS16217** **(SHIPS)**
PROCUREMENT SPECIFICATION Ⓐ FF-S-111		SUPERSEDES:	SHEET 2 OF 2

DD FORM 672-1
1 OCT 52