
FED. SUP CLASS
5935

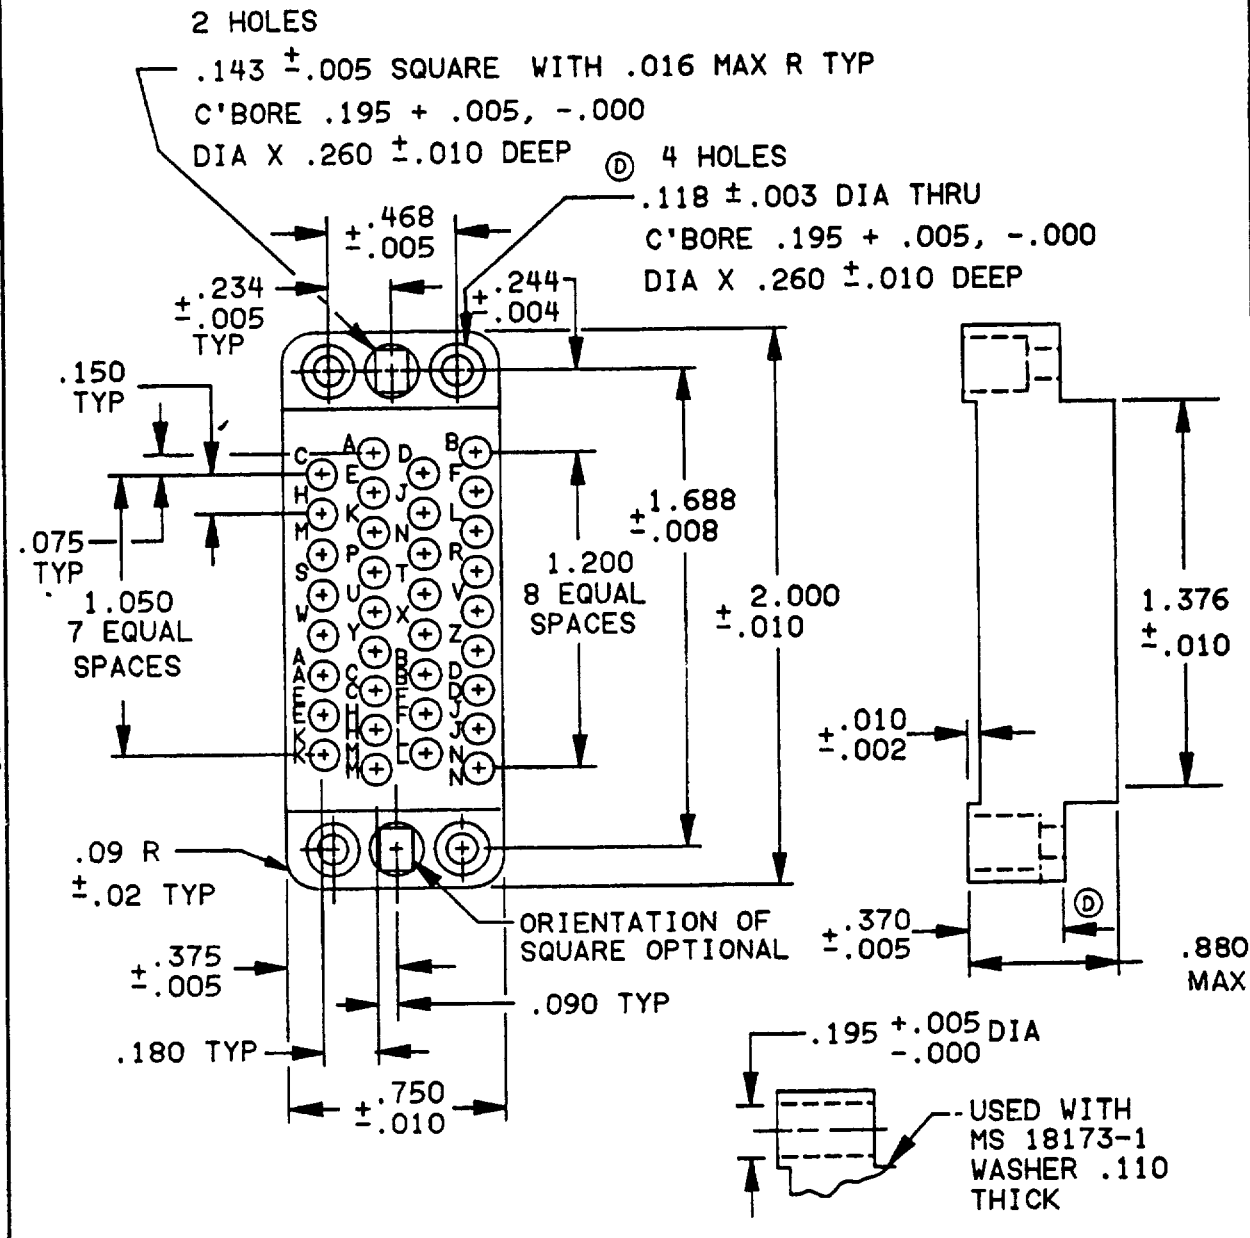

ALTERNATE CENTER HOLE CONSTRUCTIONS

DESIGN STANDARD FOR USE WITH MIL-C-28748/4.

MS Part No. MS18179-1 - Suitable for all applications
MS Part No. MS18179-2 - For long jackscrews and hood only (thru hole alternate construction)

Ⓓ denotes changes

APPROVED 20 December 1965 REVISED Ⓐ 20 May 1970 Ⓑ 23 June 1972 Ⓒ 18 March 1985 Ⓓ 9 February 1987

User activities: Army - AM, AR, ME; Navy - MC, OS; Air Force -

Review activities: Army - AT, MI; Navy - AS, SH; Air Force - 11; DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A Navy - EC Other Cus AF-85 Army - CR	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, ELECTRICAL, 34 (SIZES 16 and 20 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS18179
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) previous editions of this form are obsolete

5935-3564

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities
Army - AM, AR, ME
Navy - MC, OS
Air Force -

Review activities
Army - AT, MI
Navy - AS, SH
Air Force - 11
DLA-ES

FED SUP CLASS
5935

Inches	mm
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.008	0.20
.010	0.25
.016	0.41
.02	0.51
.072	1.83
.075	1.91
090	2.29
.118	3.00
.143	3.63
.150	3 81
.180	4.57
.195	4.95
.224	5.69
.234	5.94
.244	6.20
.260	6.60
.370	9.40
.375	9.53
.51	12.95
.750	19.05
856	21.74
1.050	26.67
1.376	34.95
1.688	42.88
2.290	58.17

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (0.38 mm)
3. Metric equivalents are given for general information only.
4. Tolerance between any two adjacent contact centers shall be ±.004 (0.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (0.15 mm).
5. Contact identification may be located on either side of the contact hole but shall appear on the front and rear of each insert.
6. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
7. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.
8. Designed for use with MIL-C-39029/35 contacts.
9. Contact hole details shall be in accordance with MIL-C-28748.
10. The maximum insertion and withdrawal force (connector assembly) shall be 42.5 pounds.
11. Insert material shall be in accordance with MIL-C-28748.

APPROVED 20 December 1965 REVISED (A) 20 May 1970 (B) 23 June 1972 (D) for changes see pages 1 and 2.

P A Navy - EC Other Cust AF-85 Army -CR	International interest	TITLE INSERT (INSULATOR), RECTANGULAR CONNECTOR, ELECTRICAL, 34 (SIZES 16 AND 20 CRIMP REMOVABLE) SOCKET CONTACTS	MILITARY STANDARD MS18179
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-29T14:16Z
Check for the most current version before use.