

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-8914

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

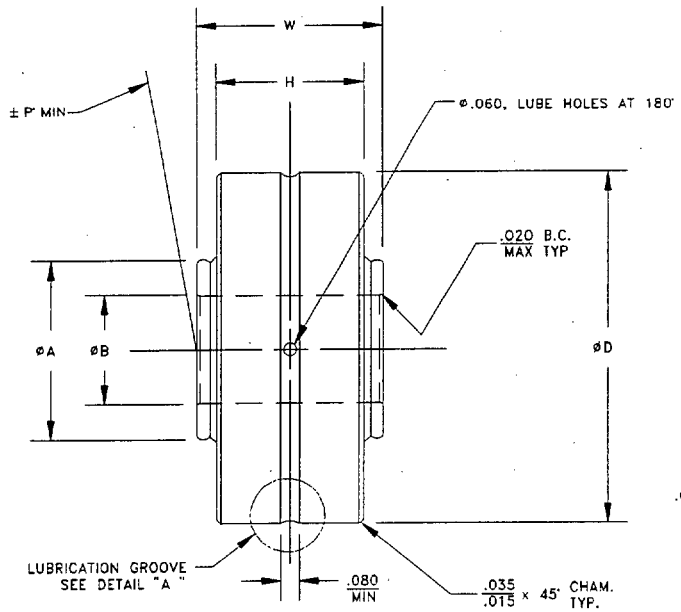

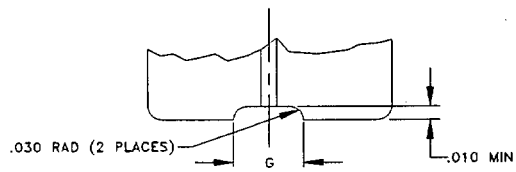

DETAIL "A"

Ⓐ TABLE 1

MS DASH NO.	REFERENCE NUMBER	øB +.0000 −.0005	øD +.0000 −.0005	W +.000 −.005	H +.000 −.005	øA +.005 −.005	F°	WT LB	LIMIT LOAD, LB RADIAL	LIMIT LOAD, LB THRUST	RADIAL DYNAMIC LOAD, LB
−3	SA3−16A−42	.1900	1.0000	.500	.344	.420	10°	.07	2,720	270	2,260
−4	SA4−16A−42	.2500	1.0000	.500	.344	.420	10°	.06	2,720	270	2,260
−5	SA5−20A−42	.3125	1.2500	.588	.375	.550	10°	.12	4,210	420	3,490
−6	SA6−23A−42	.3750	1.4375	.620	.469	.660	10°	.17	6,160	610	5,120
−7	SA7−24A−42	.4375	1.5000	.812	.625	.660	10°	.30	7,900	790	6,550
−8	SA8−26A−42	.5000	1.6250	.750	.687	.810	2.5°	.37	11,900	1,190	9,940

BASIC (NOMINAL) DIAMETER		BEARING ROUNDNESS LIMITS							
		BORE ACCEPTANCE LIMITS				O.D. ACCEPTANCE LIMITS			
			MEAN DIAMETER			MEAN DIAMETER			
OVER	INCL	d MIN	LOW	HIGH	d MAX	D MIN	LOW	HIGH	D MAX
———	2.0000	−.0005	−.005	+.00000	+.0001	−.0008	−.0005	+.0000	+.0003

Ⓐ DENOTES CHANGES

INCH−POUND

PREPARING ACTIVITY: NAVY−AS
CUSTODIANS: ARMY− AT NAVY− AS
AIR FORCE− 99 DLA−IS
REVIEW: AF−84 DLA−IS
USER:
PROJECT NUMBER: 3110−0910

MILITARY SPECIFICATION SHEET

TITLE
BEARING, ROLLER, SELF−ALIGNING SINGLE ROW ANTI−FRICTION, SEALED −65 TO 350 F, TYPE I

SPECIFICATION SHEET NUMBER
MS21431
05 DEC 94
REV A

SUPERSEDING
MS21431 22 NOV 1976

AMSC− N/A FSC −3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:39Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-8914

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

REQUIREMENTS:

1. MATERIAL: RINGS: STEEL, FED-STD-66, E52100.
   ROLLERS: STEEL, FED-STD-66, E51100 OR E52100.
2. SEALS: POLYTETRAFLUOROETHYLENE PER AMS 3652 OR POLYTETRAFLUORODETHYLENE SHEET, GLASS FABRIC REINFORCED PER AMS 3666.
3. SEAL RETAINERS: STEEL, CORROSION RESISTANT.

(A) 4. LUBRICANT: MIL-G-81322 OR MIL-G-23827. ALL BEARINGS SHALL BE PACKED WITH GREASE CONFORMING TO MIL-G-81322 UNLESS OTHERWISE SPECIFIED. IF MIL-G-23827 IS REQUIRED, ADD THE LETTER "G" AFTER THE MS21431 DASH NUMBER. MIL-G-23827 SHALL NOT BE USED FOR OPERATION WHERE TEMPERATURES EXCEED 250° F.

5. HARDNESS: HEAT TREAT RINGS AND BALLS TO ROCKWELL "E" 60 TO 66 AND STABILIZE FOR OPERATION AT 250° F.
6. SURFACE ROUGHNESS: RACEWAYS 8/ AND ROOLERS 6/ IN ACCORDANCE WITH ANSI/ASME B46.1.
7. INTERNAL CLEARANCE: RADIAL .0006 TO .0014.

(A) 8. PLATING: ALL EXTERNAL STEEL SURFACES EXCEPT BORE, SEALS AND SEAL RETAINERS, ZINC-NICKEL PLATED PER AMS 2417, TYPE I, OR CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE I, CLASS 2, TO A THICKNESS OF .0003 TO .0006 INCHES.

(A) 9. PART NUMBER: MS NUMBER AND DASH NUMBER WITH SUFFIX AS APPLICABLE.

EXAMPLE OF PART NUMBER:
MS21431 - 4G = BEARING, ROLLER, SELF-ALIGNING SINGLE ROW, .2500 IN BORE, 1.000 OUTER DIAMETER WITH MIL-G-23887, 250° F MAX
- LUBRICANT DESIGNATOR (SEE LUBRICANT REQUIREMENT)
- DASH NUMBER (SEE TABLE I)
- MILITARY SPECIFICATION

NOTES:

1. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
2. THESE LOAD RATINGS ARE FOR OPERATIONS UP TO 250° F. FOR OPERATIONS UP TO 350° F. THE RATINGS SHALL BE REDUCED BY 20%
3. DIMENSIONS TO BE MET AFTER PLATING.
4. REMOVE BURRS AND SHARP EDGES.

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY- AT NAVY- AS AIR FORCE- 99 DLA-IS REVIEW: AF-84 DLA-IS USER: PROJECT NUMBER: 3110-0910	MILITARY SPECIFICATION SHEET TITLE BEARING, ROLLER, SELF-ALIGNING SINGLE ROW ANTI-FRICTION, SEALED -65 TO 350 F, TYPE I	SPECIFICATION SHEET NUMBER MS21431 05 DEC 94 REV A SUPERSEDING MS21431 22 NOV 1976 AMSC- N/A FSC -3110
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 2 of 2

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:39Z
Check the source to verify that this is the current version before use.