FED. SUP CLASS.
4730

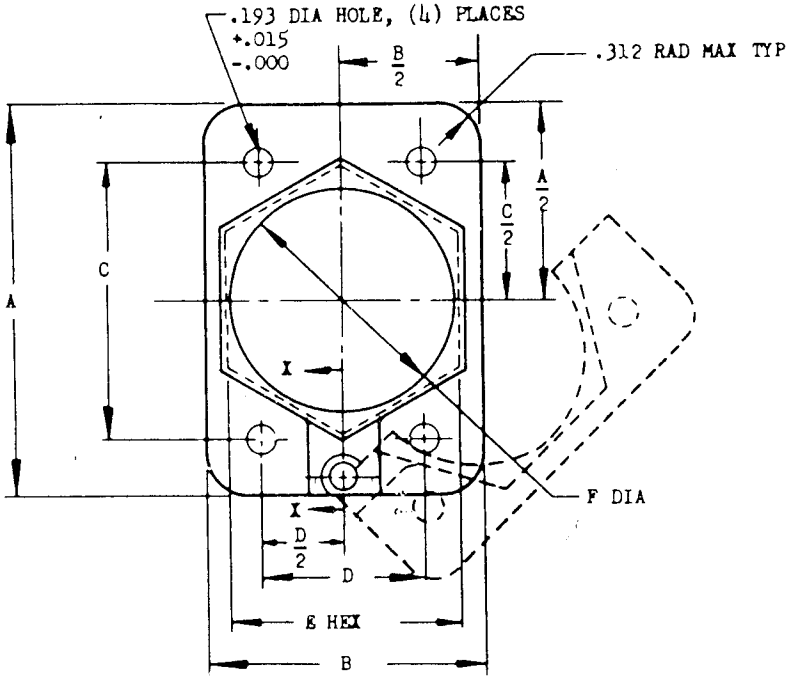

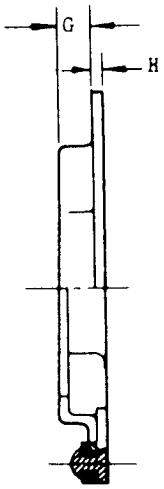

SECTION X-I

DASH NO.		EQUIV TUBE DIA	A +.000 -.010	B +.000 -.020	C ±.010	D ±.010	E +.010 -.000	F +.000 -.010	G +.000 -.016	H ±.015	WT IN LB
4		1/4	2.250	1.625	1.516	.876	1.130	1.090	.250	.060	
6		3/8	2.500	1.812	1.732	1.000	1.380	1.340			
8		1/2	2.750	1.938	1.948	1.126	1.642	1.602			
10		5/8		2.125							
12		3/4	3.000	2.375	2.162	1.250	1.892	1.852	.312		
16		1	3.250	2.625	2.380	1.376	2.146	2.106			
20 (B)		1-1/4	4.125	3.250	2.938	1.750	2.772	2.482			

MATERIAL: SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.

DIMENSIONS IN INCHES.

FLANGE FOR USE WITH STANDARDS MS24333 AND MS24334.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 12 Aug 57 REVISED (A) 7 Nov 57 (B) 10 May 68

Review activities:
Navy - AS
USAF - 82, 11

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

CUSTODIANS	OTHER INT.
PA USAF-82	A -
Cust Navy-AS (B)	N -
	AF -

MILITARY STANDARD

FLANGE, BULKHEAD MOUNTING, HYDRAULIC, SELF-SEALING COUPLING

MS24335 (ASG)

Procurement Specification: MIL-C-25427

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672
1 OCT 62

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-509 A 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.