

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THE SOLICITATION. DODISS SPECIFIED MIL-T-27535

Form Approved
OMB No 0704-0188

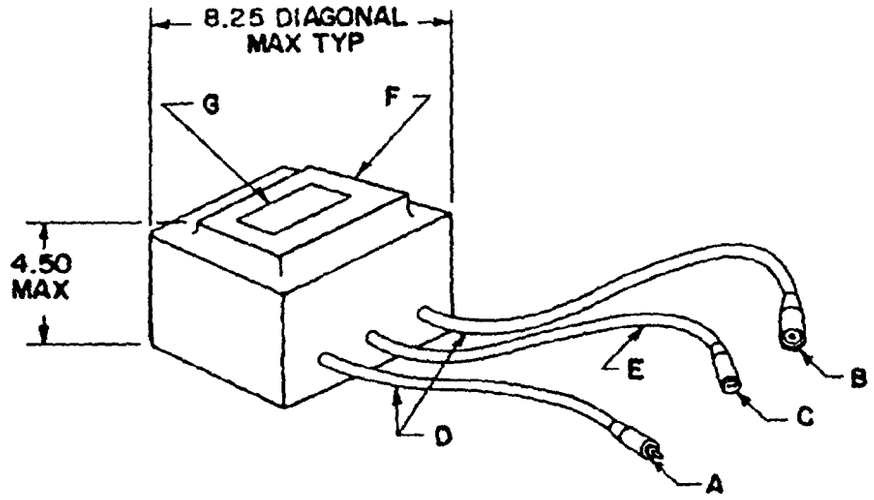

© ENVELOPE OPTION 1

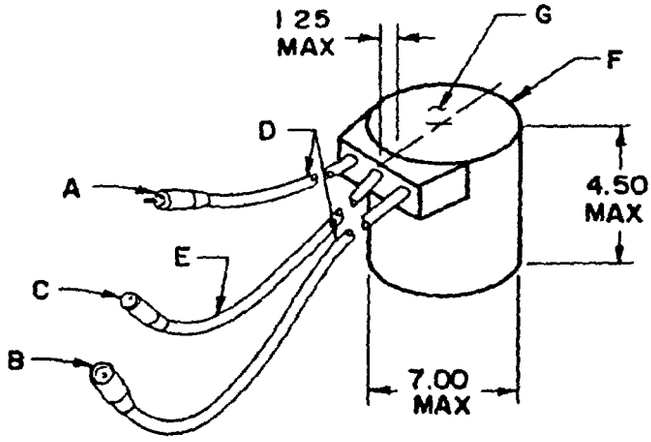

© ENVELOPE OPTION 2

Ⓑ Denotes Changes

PREPARING ACTIVITY Air Force-85 CUSTODIANS ARMY NAVY AIR FORCE 85 DLA Navy-AS, YD REVIEW Air Force-99, 11, DLA-ES USER PROJECT NUMBER 5950-0759	MILITARY SPECIFICATION SHEET TITLE TRANSFORMER, POWER, ISOLATION; AIRPORT LIGHTING, 300W/6 6A/6 6A/5000V	SPECIFICATION SHEET NUMBER MS27134B 15 Nov 1990 SUPERSEDING MS27134A 18 Aug 1965 AMSC N/A FSC 5950
DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited.		Page 1 of 2

Source: https://assist.dla.mil -- Downloaded: 202640-23T15:16Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-T-27535

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No 0704 0188

ELECTRICAL CHARACTERISTICS					
PRI AMP	PRI PWR FACTOR MIN %	EFFICIENCY MIN %	MAX SEC VOLTS RMS	SECONDARY AMPS	LOAD
6 6	95	90		6.53-6 67	7 2 OHMS (a)
6 6				6.6 -7 1	SHORT CIRCUITED
6 6			135	0	OPEN CIRCUITED
5 2				5 1 -5 4	5 9 OHMS (a)
4 1				4 0 -4 3	4 8 OHMS (a)
3.4				3 3 -3 6	4 2 OHMS (a)
2 8				2 7 -3.0	3.8 OHMS (a)

(a) THE LOAD MAY BE EITHER A 300W, 6.6A LAMP OR THE OHMIC RESISTANCE SPECIFIED

A PLUG FIGURE 6a FAA SPECIFICATION L-823

B RECEPTACLE FIGURE 6b FAA SPECIFICATION L-823

C. RECEPTACLE AS SPECIFIED IN TABLE

D PRIMARY CABLE (SEE TABLE)

E SECONDARY CABLE (SEE TABLE)

F. CASE.

G IDENTIFICATION MARKING (LOCATION OPTIONAL).

PART NO.	C	LEAD LENGTH INCHES	
		D	E
MS27134-1	FIG 1b FAA SPEC L-823	18^{+3}_{-1}	12^{+3}_{-1}
MS27134-2	FIG 1c FAA SPEC L-823	30 ±3	54 ±3

IN COMPUTING EFFICIENCY, CORRECTION SHALL BE MADE FOR LEAD LOSSES

MAXIMUM WEIGHT 20 POUNDS.

DIMENSIONS IN INCHES

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

PREPARING ACTIVITY Air Force-85
CUSTODIANS ARMY NAVY- AIR FORCE 85 DLA- Navy-AS, YD
REVIEW Air Force- 99, 11, DLA-ES
USER
PROJECT NUMBER 5950-0759

MILITARY SPECIFICATION SHEET
TITLE TRANSFORMER, POWER, ISOLATION· AIRPORT LIGHTING, 300W/6.6A/6.6A/5000V

SPECIFICATION SHEET NUMBER MS27134B
SUPERSEDING MS27134A 18 Aug 1965
AMSC N/A FSC 5950

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-01-23 15:15:16Z
Check the source to verify that this is the current version before use.