

FED. SUP CLASS
5935

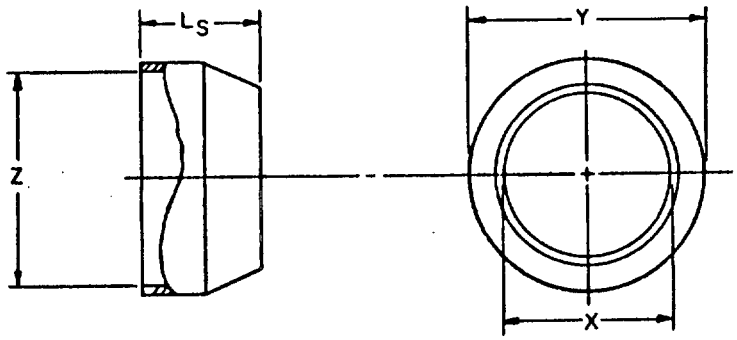


STRAIGHT -1

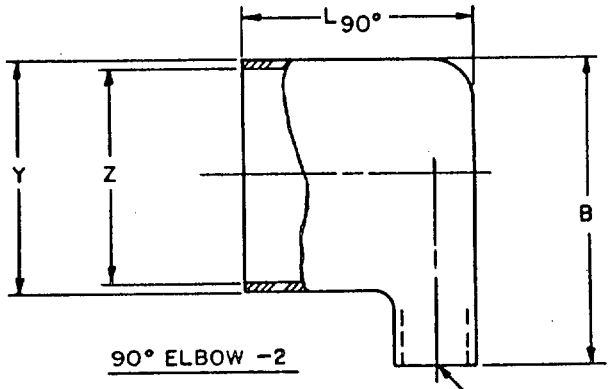


90° ELBOW -2

APPROVED 28 JAN '66 REVISED (A) 10 AUG '66 (B) 17 JAN 72 (C) 17 NOV 87

© CANCELED FOR PROCUREMENT
USE MIL-C-85049/74

| Shell size | A min. Cross-section area in sq | B Max | $L_S$ | | $L_{90°}$ Max | X Min ID | Y Max OD | Z +.000 -.010 Dia |
|---|---|---|---|---|---|---|---|---|
| | | | (B) Min | Max | | | | |
| 8 | .110 | 1.000 | .450 | .500 | .766 | .317 | .608 | .516 |
| 10 | .200 | 1.125 | | | .922 | .434 | .734 | .642 |
| 12 | .290 | | | | 1.031 | .548 | .858 | .766 |
| 14 | .400 | 1.297 | | | 1.016 | .673 | .984 | .892 |
| 16 | .490 | 1.375 | | | | .798 | 1.110 | 1.018 |
| 18 | .590 | 1.469 | | | 1.078 | .899 | 1.234 | 1.142 |
| 20 | .730 | 1.625 | .550 | .594 | 1.094 | 1.024 | 1.360 | 1.268 |
| 22 | .860 | 1.703 | | | | 1.149 | 1.484 | 1.392 |
| 24 | 1.070 | 2.047 | | | 1.281 | 1.274 | 1.610 | 1.518 |
| 28 | --- | --- | | | --- | 1.399 | 1.734 | 1.642 |

© Denotes change

| P.A. AF-85 Other Cust | International interest | TITLE BOOT, POTTING, ELECTRIC, CONNECTOR | MILITARY STANDARD MS27333 (USAF) |
|---|---|---|---|
| Procurement Specification MIL-C-27599 | | SUPERSEDES: | Page 1 of 2 |

DD FORM 1 SEP 63 672 (LIMITED COORDINATION) 5935-F305


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This standard has been approved by Department of the AF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

https://assist.dla.mil - Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

Example of part no.
MS27333 - 12 - 1

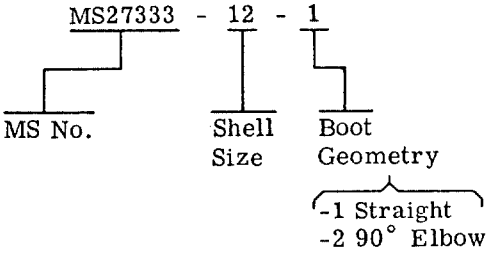


| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|
| .010 | .25 | .608 | 15.44 | 1.018 | 25.86 | 1.360 | 34.54 |
| .110 | 2.79 | .642 | 16.31 | 1.024 | 26.01 | 1.375 | 34.93 |
| .200 | 5.08 | .673 | 17.09 | 1.031 | 26.19 | 1.392 | 35.36 |
| .290 | 7.37 | .730 | 18.54 | 1.070 | 27.18 | 1.399 | 35.53 |
| .317 | 8.05 | .734 | 18.64 | 1.078 | 27.38 | 1.469 | 37.31 |
| .400 | 10.16 | .766 | 19.46 | 1.094 | 27.79 | 1.484 | 37.69 |
| .434 | 11.02 | .798 | 20.27 | 1.110 | 28.19 | 1.518 | 38.56 |
| .450 | 11.43 | .858 | 21.79 | 1.125 | 28.58 | 1.610 | 40.89 |
| .490 | 12.45 | .860 | 21.84 | 1.142 | 29.01 | 1.625 | 41.28 |
| .500 | 12.70 | .892 | 22.66 | 1.149 | 29.18 | 1.642 | 41.71 |
| .516 | 13.11 | .899 | 22.83 | 1.234 | 31.34 | 1.703 | 43.26 |
| .548 | 13.92 | .922 | 23.42 | 1.268 | 32.21 | 1.734 | 44.04 |
| .550 | 13.97 | .984 | 24.99 | 1.274 | 32.30 | 2.047 | 51.99 |
| .590 | 14.99 | 1.000 | 25.40 | 1.281 | 32.54 | | |
| .594 | 15.09 | 1.016 | 25.81 | 1.297 | 32.94 | | |

© FOR CHANGES, SEE PAGE I

APPROVED 28 JAN '66 REVISED

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Entrance configuration optional with indicated cross section area.
4. Material: Translucent nylon.
5. Minimum plastic wall thickness .020(.51 mm).
6. For design feature purposes, this standard takes precedence over documents referenced herein.
7. Referenced documents shall be of the issue in effect on the date of invitations for bid.

| P.A. AF- 85 Other Cust | International interest | TITLE: BOOT, POTTING, ELECTRIC, CONNECTOR | MILITARY STANDARD MS27333 (USAF) |
|---|---|---|---|
| Procurement Specification MIL-C-27599 | | SUPERSEDES: | Page 2 of 2 |

DD FORM 1 SEP 63 672 (LIMITED COORDINATION)

This standard has been approved by Department of the AF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.