This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5935

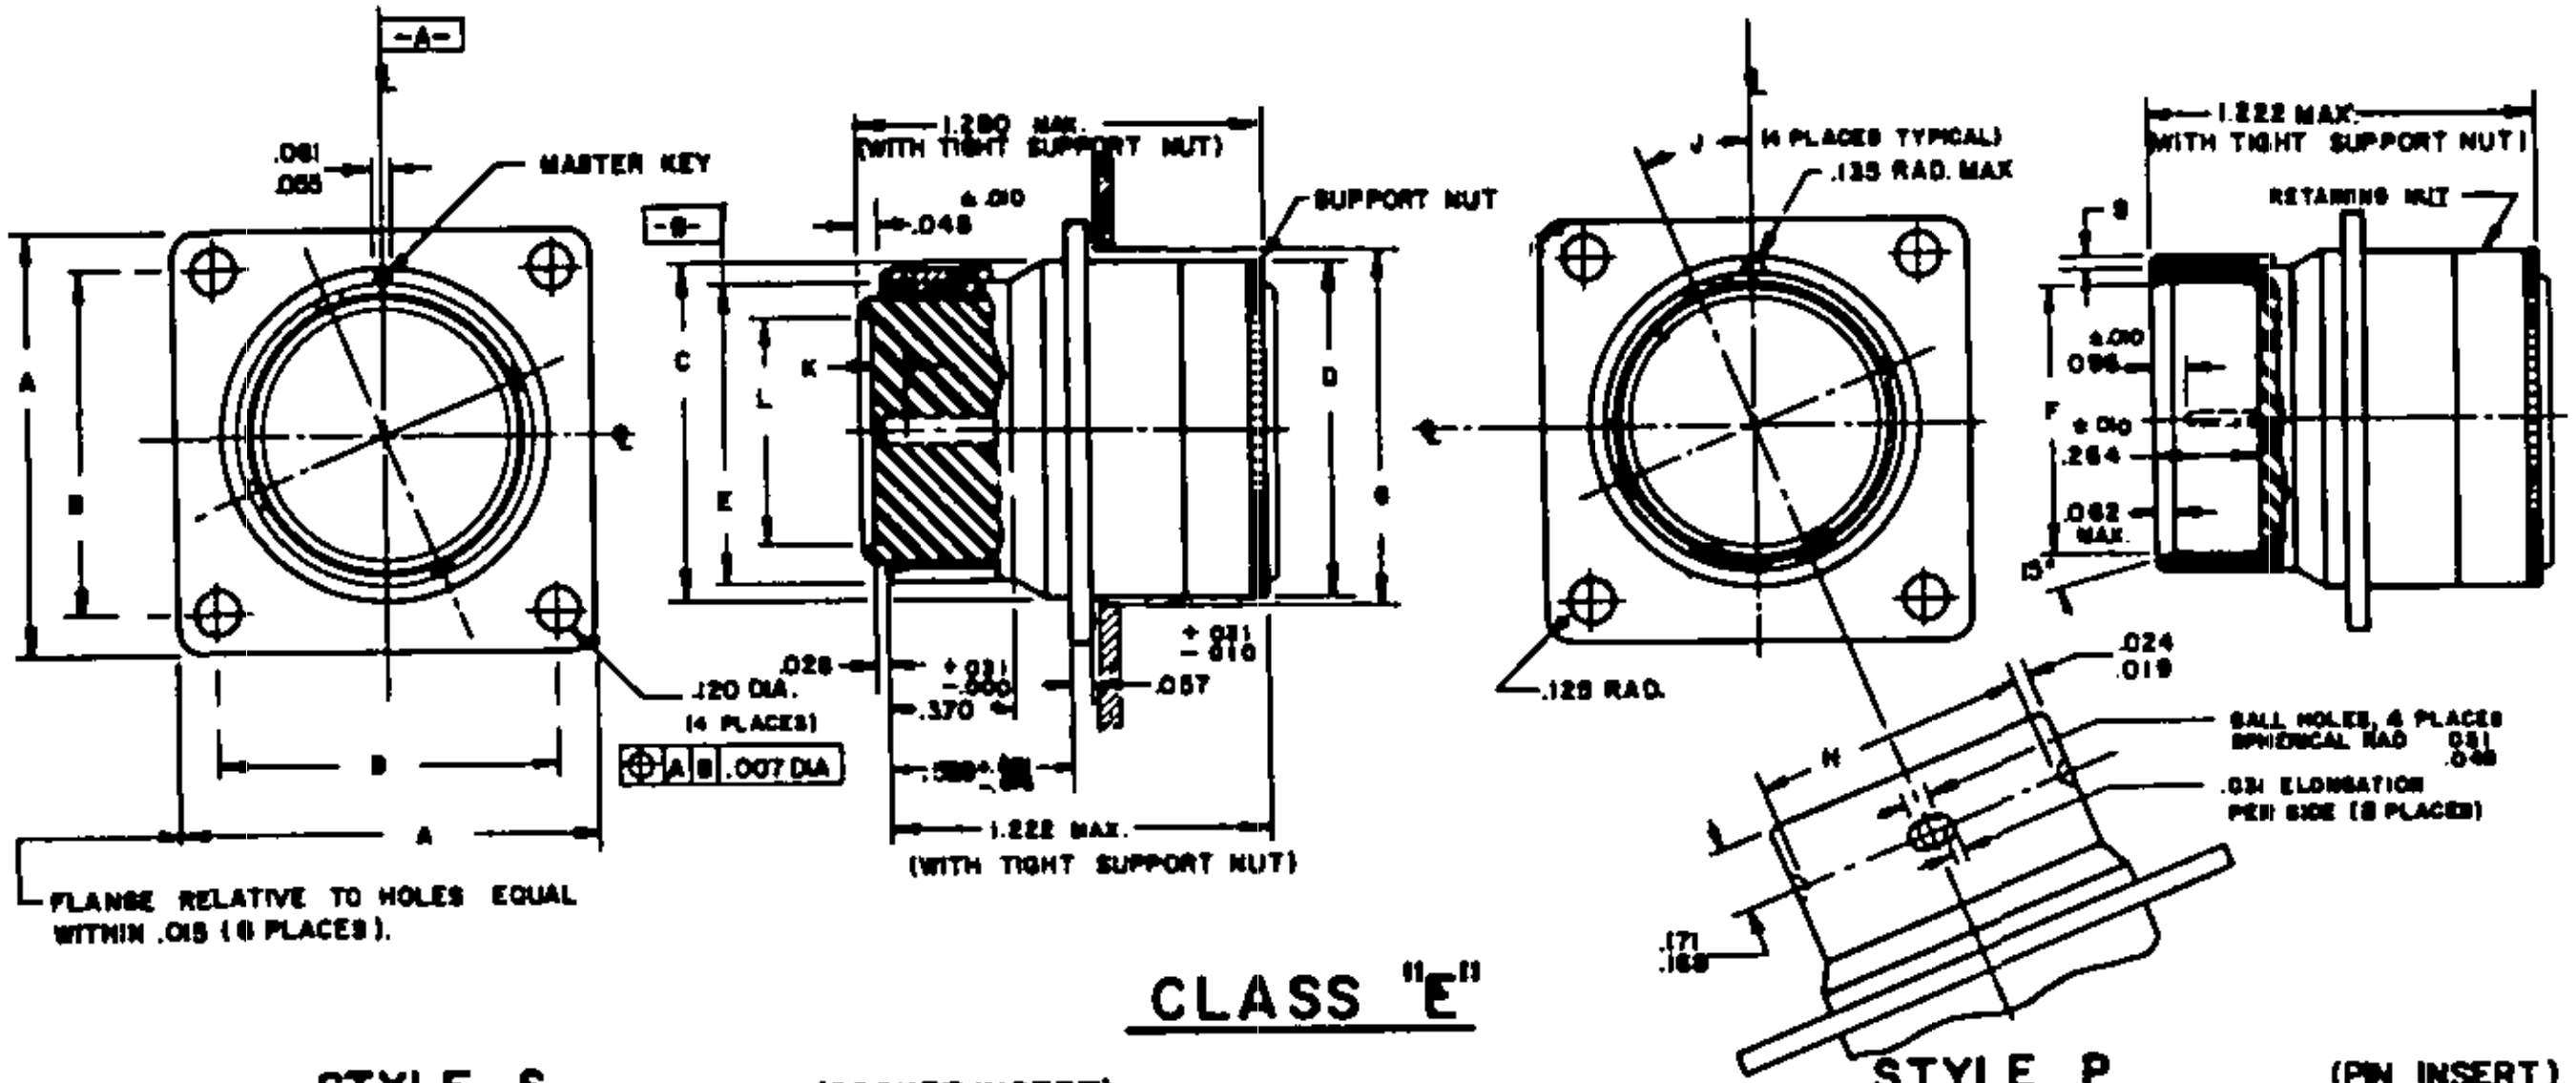
-A-
.061
.055
MASTER KEY
-B-
1.290 MAX.
(WITH TIGHT SUPPORT NUT)
±.010
.048
SUPPORT NUT
A
B
C
D
E
K
L
G
.028
.120 DIA.
(4 PLACES)
⊕ A B .007 DIA
+.031
-.000
.370
+.031
-.016
.057
1.222 MAX.
(WITH TIGHT SUPPORT NUT)
FLANGE RELATIVE TO HOLES EQUAL WITHIN .015 (8 PLACES).
J
(4 PLACES TYPICAL)
.135 RAD. MAX
.128 RAD.
1.222 MAX.
WITH TIGHT SUPPORT NUT
RETAINING NUT
g
±.010
.096
F
±.010
.264
.062
MAX.
13°
.024
.019
BALL HOLES, 4 PLACES
SPHERICAL RAD .031 .046
.031 ELONGATION
PER SIDE (8 PLACES)
H
.171
.166

CLASS "E"

STYLE S (SOCKET INSERT) — STYLE P (PIN INSERT)

SHELL SIZE DASH NO.	A MAX. LENGTH SIDE	B BSC. MOUNTING CENTERS	C MAX. DIA. FRONT	D MAX. DIA REAR	E +.000 -.004 SHELL O.D.	F +.003 -.007 SHELL I.D.	G MIN. DIA. MOUNTING HOLE	H +.003 -.000 BALL HOLE SPACING	J BALL HOLE LOCATION	K POINT OF SPRING CONTACT	L INSERT SEAL I.D.	g +.003 -.004 HEIGHT OF KEY	FOR INSERT ARRANGEMENT SEE DRAWING
-3	.896	.625	.578	.625	.435	.364	.532	.396	30°	.138 MAX. MEASURE WITH SQUARE NOSE PIN HAVING BASIC DIAMETER OF MATING CONTACT	.264	.045	MS 33698
-7	1.021	.719	.691	.702	.570	.480	.709	.531	$22\frac{1}{2}°$		.380		MS 33699
-12	1.114	.812	.828	828	.704	.621	.835	.666			.520		MS 33700
-19	1.208	.906	.953	.953	.843	.760	.960	.804			.660		MS 33701
-27	1.302	.969	1.136	1.102	.998	.915	1.143	.959			.815		MS 33702
-37	1.458	1.187	1.266	1.266	1120	1.037	1.273	1.081			.937		MS 33703

EXAMPLE OF PART NO: MS 3140 E 19-30 S Y

MS NUMBER — CLASS — SIZE — INSERT ARRANGEMENT — CONTACT STYLE — ALTERNATE INSERT POSITION

NOTES:

1. TRUE POSITION (T.P.) TOLERANCES SPECIFIED ARE IN ACCORDANCE WITH MIL-STD-8.
2. DIMENSIONS LOCATING TRUE POSITIONS ARE BASIC.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED, TOLERANCE DECIMALS: ±.016
ANGULAR TOLERANCE: ± ½°

APPROVED 10 SEPT 62 REVISED Ⓐ 1 NOV 1965 Ⓑ 6 Mar 67 Ⓒ 21 JULY 1971

P.A. NAVY-AS
Other Cust
USAF-11
ARMY-EL

International Interest

Procurement Specification
MIL-C-81703

TITLE
CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE,
WALL MOUNTING FLANGE, PUSH-PULL COUPLING.
SERIES 2 (CLASS E AND J)

SUPERSEDES:

MILITARY STANDARD

MS 3140

SHEET 1 OF 3

DD FORM 672 10 APR 64 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1761-7

[illegible]. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

CLASS J

JACKETED CABLE GLAND SEAL

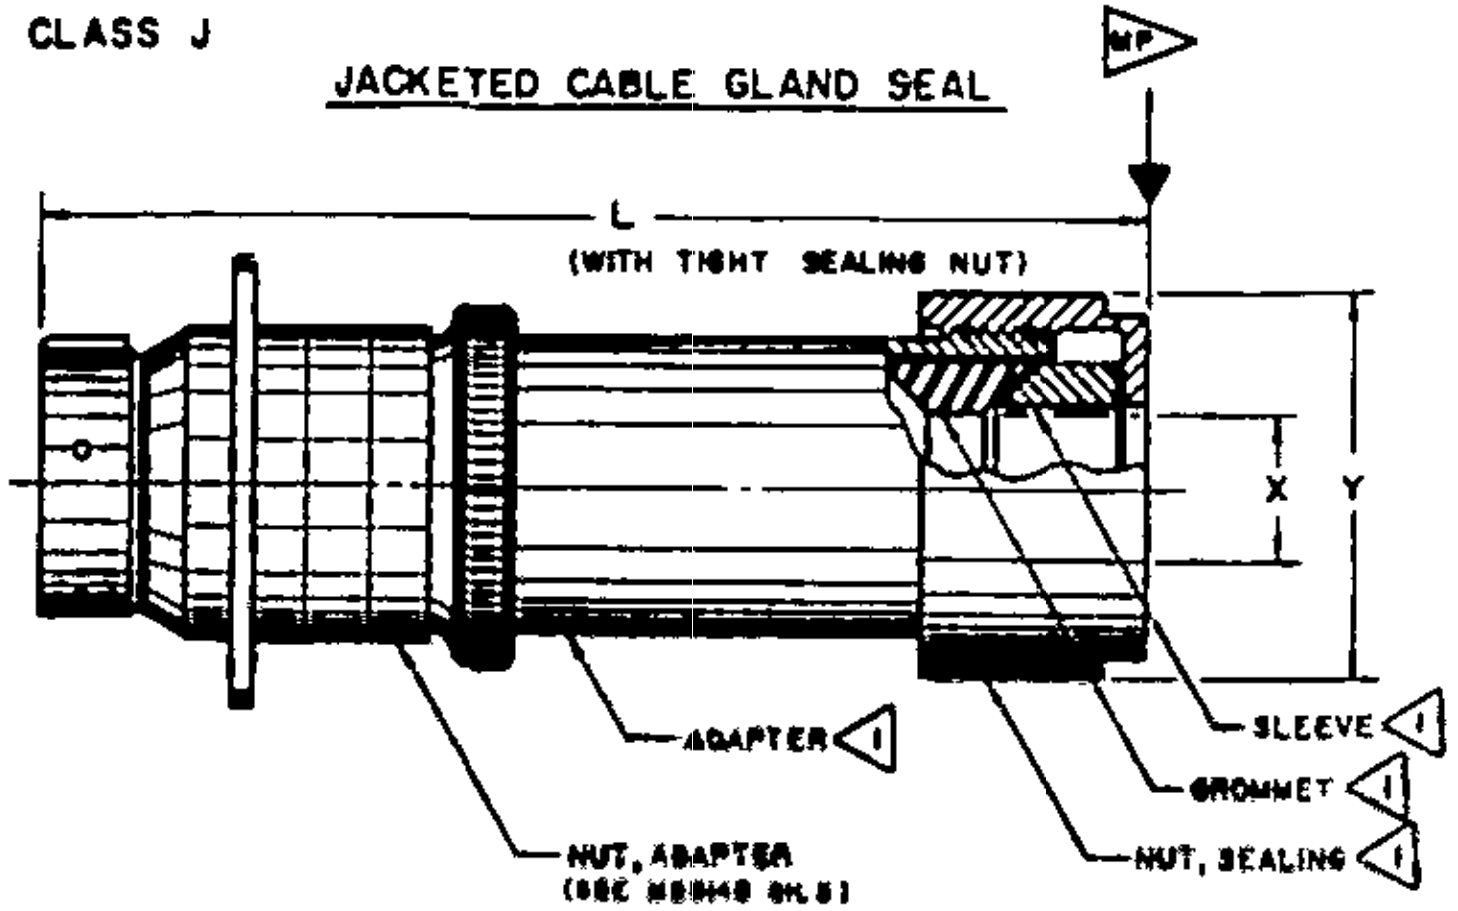

SHELL SIZE DASH NO.	L LENGTH MAX.	X INSIDE DIA.		Y MAX.	MP MAX. CABLE WEIGHTS IN POUNDS (ALLOWABLE FORCE IN DIRECTION INDICATED)
		MIN.	MAX.		
-3	3.010	.178	.210	.446	2.0
-7	3.994	.381	.413	.950	2.7
-12	4.460	.412	.444	.966	4.0
-19	4.494	.552	.584	1.113	5.5
-27	4.494	.600	.632	1.115	8.0
-37	4.525	.662	.694	1.176	12.0

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCE: DECIMALS ±.016, ANGULAR TOLERANCE ± 1/2°

1 FOR ADAPTER, SEALING NUT, GROMMET & SLEEVE SEE MS 3130 SH. 3.

CLASS J JACKETED CABLE GLAND SEAL - WATERTIGHT TYPE
FOR USE WITH CLASS E CONNECTORS

EXAMPLE OF PART NO.

MS3140 J 19-80 S Y

- MS NO.
- CLASS
- SIZE
- INSERT ARRANGEMENT
- CONTACT STYLE
- ALTERNATE INSERT POSITION

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

FED. SUP CLASS
5935

APPROVED 10 SEPT. '62 REVISED Ⓒ FOR CHANGES SEE SHEETS 1, 2 & 3.

P.A. NAVY-AS Other Cust USAF-11 ARMY-EL	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, WALL MOUNTING FLANGE, PUSH-PULL COUPLING, SERIES 2 (CLASS E AND J)	MILITARY STANDARD **MS3140**
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 2

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

FED. SUP CLASS
5935

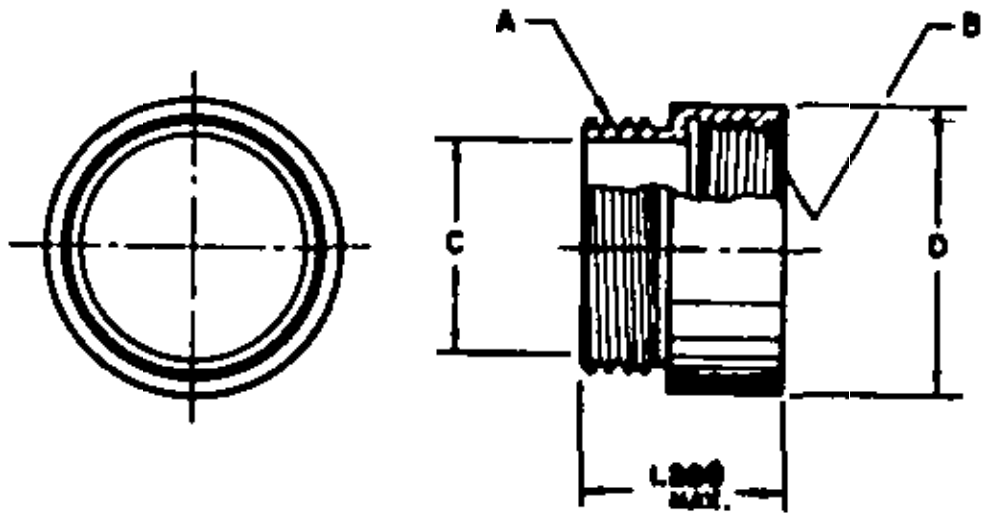

MS3140J-*A ADAPTER NUT, JACKETED CABLE SEALING

SHELL SIZE DASH NO.	A THREAD	B THREAD	C I.D.	D O.D.
-3	1/2-28 UNEF	1/2-28 UNEF	.379	.576
-7	5/8-24 UNEF	5/8-24 UNEF	.479	.687
-12	3/4-20 UNEF	3/4-20 UNEF	.594	.812
-19	7/8-20 UNEF	7/8-20 UNEF	.733	.937
-27	1-20 UNEF	1-20 UNEF	.886	1.067
-37	1-3/16-18 UNEF	1-3/16-18 UNEF	1.024	1.290

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCE: DECIMALS ±.010, ANGULAR TOLERANCE ± 1/2°.

EXAMPLE OF PART NO.

MS3140 J - 7 A

MS NUMBER
CLASS
SIZE
A ADAPTER NUT

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

NOTES:
1. SEE MS3140 SH. 2 FOR USE OF ADAPTER NUT.
2. THIS ADAPTER NUT IS INTENDED FOR USE WITH CLASS J CONNECTORS, JACKETED CABLE SEALING, WATERTIGHT TYPE.

APPROVED 10 SEPT 1962 REVISED Ⓒ FOR CHANGES SEE SHEETS 1, 2 & 3.

P.A. NAVY-AS Other Cust USAF - 11 ARMY-EL	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, CRIMP TYPE, WALL MOUNTING FLANGE, PUSH-PULL COUPLING. SERIES 2 (CLASS E AND J)	MILITARY STANDARD MS3140
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 3

DD FORM 1 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.