

FED. SUP CLASS
6640

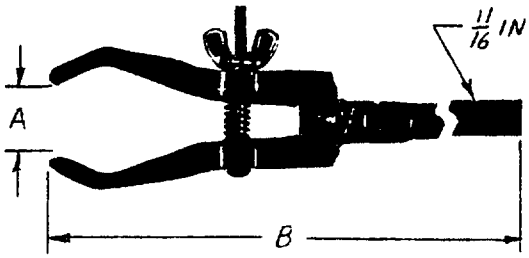

TYPE I
TWO PRONG (ROUND) FIXED JAW

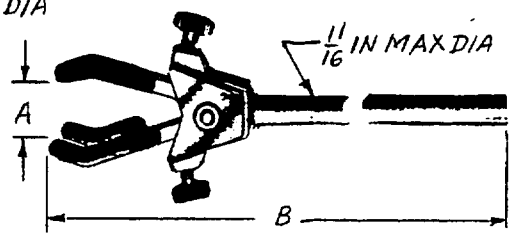

TYPE II
THREE PRONG JAW

PART NUMBER	TYPE OF JAW	JAW SLEEVES	A MAX (IN.)	B (IN.)
MS36012-1	I	Vinyl	1.50	8.0 ± 0.25
MS36012-2	I	Fiberglass	1.50	8.0 ± 0.25
MS36012-3	I	Vinyl	2.50	9.0 ± 0.25
MS36012-4	I	Fiberglass	2.50	9.0 ± 0.25
MS36012-5	II	Vinyl	3.5	10.0 ± 0.50
MS36012-6	II	Fiberglass	3.5	10.0 ± 0.50
MS36012-7	II	Vinyl	2.25	8.75 ± 0.25
MS36012-8	II	Fiberglass	2.25	8.75 ± 0.25

MATERIAL: Jaw and jaw housing shall be of aluminum-base alloy in accordance with Federal Specification QQ-A-591, Alloy No. A380 or zinc-base alloy in accordance with Federal Specification QQ-Z-363, Composition A.

Extension arms shall be solid extruded aluminum for aluminum-base jaws and seamless brass tubing for zinc-base alloy jaws.

Fittings shall be of forged aluminum in accordance with Federal Specification QQ-A-367, Composition 2017, or chemical resisting zinc alloy. Zinc-base alloy clamps and clamp holders may have copper alloy fittings in accordance with Federal Specification QQ-C-523 or QQ-C-525.

Springs shall be of phosphor bronze in accordance with Federal Specification QQ-P-330, Composition A, or corrosion-resisting steel in accordance with Federal Specification QQ-S-763, Class 202 or 302.

Plastic sleeves shall be formed by hot dipping the clamp jaw in vinyl plastisol in accordance with Military Specification MIL-P-20689, Type II.

Fiberglass sleeves shall be woven non-raveling slip on type.

DESIGN: Fitting threads shall be in accordance with Federal Handbook H28, Unified National Coarse Thread Series. Screws shall have one and one-half inches of thread.

Type I clamps shall have a two-pronged jaw that spreads under spring tension and be adjustable to maximum opening by means of a single screw and wingnut.

Type II clamps shall have a two-pronged jaw and a one-pronged jaw, each independently adjustable by means of a separate thumbscrew. The one-pronged jaw shall be so located that it is equidistant from both prongs of the two-pronged jaw.

©ENTIRE STANDARD REVISED

APPROVED 23 Dec 1959 REVISED (A) 15 Dec 1967 (B) 8 Oct 1975 (C) 4 Dec 1985

USER ACTIVITIES: ARMY - ME, NAVY - MS, AIR FORCE - 03

REVIEWER ACTIVITIES: ARMY - MD, NAVY - AS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		CLAMP, UTILITY, LABORATORY EXTENSION	MS36012
Procurement Specifications NNN-C-440	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-1310

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS

NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. For design features purposes, this standard takes precedence over procurement document referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. FSCM: 22527, 59728, 64484, 87664.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED REVISED

P.A. / Other Cust	INTERNATIONAL INTEREST	TITLE: CLAMP, UTILITY, LABORATORY EXTENSION	MILITARY STANDARD MS36012
Procurement Specifications	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.