THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-S-21472

Form Approved
OMB No 0704-0188

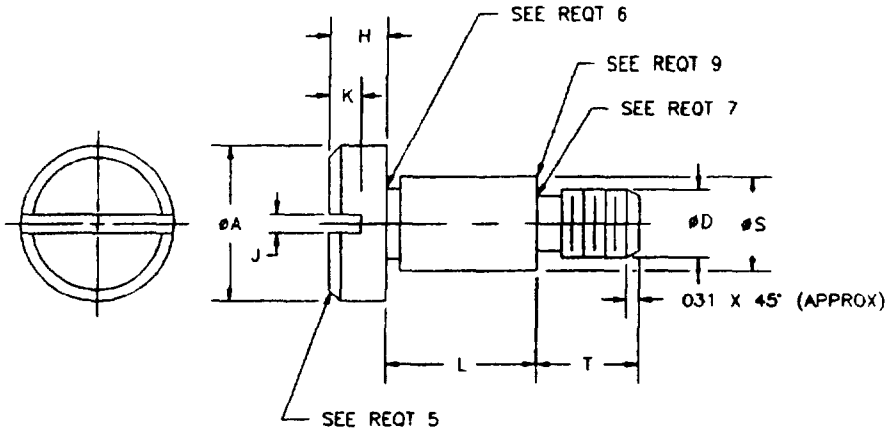


TABLE I DASH NUMBERS AND DIMENSIONS

NOMINAL SIZE		1250	1875	2500	3125	5000
øS SHOULDER	MAX	1245	1870	2495	3120	4995
	MIN	1235	1860	2485	3110	4985
øD NOMINAL THREAD SIZE		112 40UNC-2A	164 32UNC-2A	190 32UNF-2A	250 20UNC-2A	375 16UNC-2A
øA HEAD	MAX	2812	3437	4062	5312	7812
	MIN	2188	2813	3438	4688	7188
H HEAD HEIGHT	MAX	1562	1874	2187	2499	3437
	MIN	0938	1250	1563	1875	2813
T THREAD LENCTH	MAX	1874	2187	2812	4687	6562
	MIN	1250	1563	2188	4063	5938
J SLOT WIDTH	MAX	039	054	075	084	106
	MIN	031	045	064	072	091
K SLOT DEPTH	MAX	048	071	083	094	164
	MIN	035	054	064	081	133
(A) L SHOULDER LENGTH ± 003		DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
125		1	6	16		
188		2	7	17		
250		3	8	18	27	
313		4	9	19	28	
375		5	10	20		
500			11	21		29
625			12	22		
750			13	23		
1 000			14	24		
1 250			15	25		
1 500				26		

(A) DENOTES CHANGE(S)

INCH-POUND

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY- AR NAVY- AS
AIR FORCE- 99 DLA-
REVIEW AT, AV, MC MI, NS, OS 82
PROJECT NUMBER 5305-2037

MILITARY SPECIFICATION SHEET
TITLE
SCREW, SHOULDER, SLOTTED-HEAD, CORROSION-RESISTANT STEEL

SPECIFICATION SHEET NUMBER
MS51575 30 DEC 94 REV A
SUPERSEDING
MS51575 9 DEC 88
AMSC- N/A FSC 5305

DISTRIBUTION STATEMENT
A Approved for public release distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-S-21472

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

REQUIREMENTS

(A) 1 MATERIAL. STEEL CORROSION-RESISTANT UNS S30300 (TYPE 303) CONDITION A IN ACCORDANCE WITH ASTM A582/582M OR UNS S30400 (TYPE 304) OR UNS S30430 (FORMERLY TYPE XM-7) IN ACCORDANCE WITH ASTM A493

(A) 2 PASSIVATION. GRADE S30300 STEEL SHALL BE PASSIVATED IN ACCORDANCE WITH QQ-P-35 TYPE II GRADES S30400 AND S30430 STEEL SHALL BE PASSIVATED IN ACCORDANCE WITH QQ-P-35 TYPE VI OR VII

(A) 3 MAGNETIC PERMEABILITY. THE SCREWS SHALL HAVE A MAGNETIC PERMEABILITY OF 2.0 MAXIMUM (AIR = 1.0) IN A FIELD STRENGTH OF H = 200 OERSTEDS USING A MAGNETIC INDICATOR IN ACCORDANCE WITH ASTM A342 TEST METHOD NO 6

4 THREADS. THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20 SYSTEM 21

5 HEAD CHAMFER. THE CHAMFER SHALL BE AT AN ANGLE OF 30° TO 45° WITH THE PLANE OF THE TOP OF THE HEAD. THE EDGE BETWEEN THE TOP OF THE HEAD AND THE CHAMFER MAY BE SLIGHTLY ROUNDED

6 NECK AND FILLET UNDER HEAD. SCREWS MAY BE NECKED UNDER THE HEAD AT OPTION OF THE MANUFACTURER

7 NECK UNDER SHOULDER. THE NECK UNDER THE SHOULDER SHALL ALLOW THE SHOULDER TO SEAT AGAINST THE FACE OF A STANDARD BASIC "GO" THREAD RING GAGE

8 BEARING SURFACE. THE PLANE OF THE BEARING SURFACE OF THE HEAD SHALL BE PERPENDICULAR TO THE AXIS OF THE SHOULDER WITHIN A MAXIMUM DEVIATION OF 2°

9 EDGE OF SHOULDER. THE EDGE OF THE SHOULDER MAY BE BROKEN. THE RADIUS OR CHAMFER SHALL NOT EXCEED .005 INCH FOR SHOULDERS WITH NOMINAL DIAMETERS OF .3125 INCH AND UNDER. THE RADIUS OR CHAMFER SHALL NOT EXCEED .008 INCH FOR SHOULDERS WITH NOMINAL DIAMETERS OF .5000 INCH AND OVER

10 CONCENTRICITY. CONCENTRICITY SHALL BE IN ACCORDANCE WITH ASME/ANSI B18.3

11 PART NUMBER. THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS51575-24
- 24 — DASH NUMBER
- MS51575 — BASIC MS NUMBER

(A) MS51575-24 INDICATES - SCREW SHOULDER SLOTTED-HEAD CORROSION-RESISTANT STEEL
2500 INCH NOMINAL SIZE 1.000 NOMINAL SHOULDER LENGTH
190-32 UNF-2A NOMINAL THREAD SIZE

NOTES:

1 DIMENSIONS ARE IN INCHES

(A) 2 INTERPRET DIMENSIONS AND TOLERANCES IN ACCORDANCE WITH ANSI Y14.5M-1982

(A) 3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE

(A) 4 UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION

PREPARING ACTIVITY DLA-IS CUSTODIANS ARMY- AR NAVY- AS AIR FORCE- 99 DLA- REVIEW AT AV MC MI NS OS, 82 PROJECT NUMBER 5305-2037	MILITARY SPECIFICATION SHEET TITLE SCREW SHOULDER SLOTTED-HEAD CORROSION-RESISTANT STEEL	SPECIFICATION SHEET NUMBER MS51575 30 DEC 94 REV A SUPERSEDING MS51575 9 DEC 88 AMSC - N/A FSC 5305

DISTRIBUTION STATEMENT
A Approved for public release distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.