
FED. SUP CLASS
2320

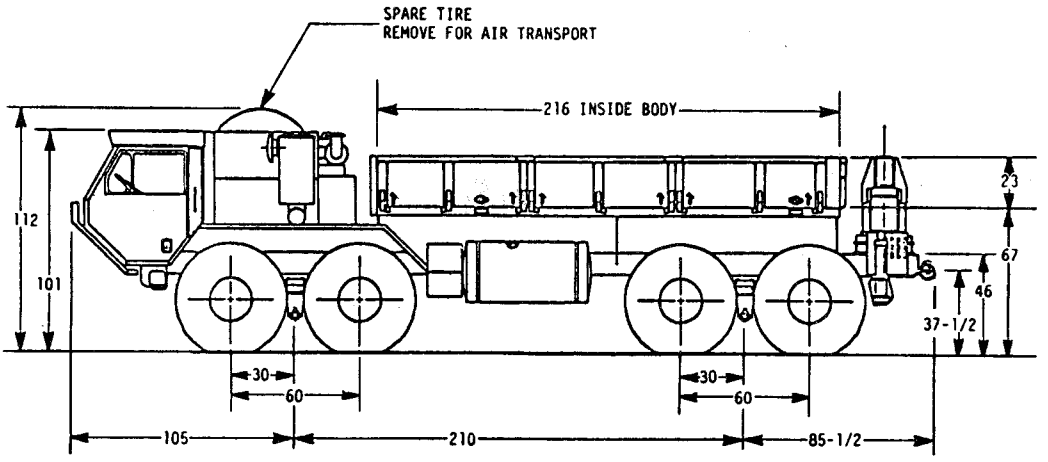

VEHICLE CHARACTERISTICS

MODEL:	M977
VEHICLE WIDTH:	96 IN
CURB WEIGHT:	
FULLY EQUIPPED	35,500 LBS
PAYLOAD:	
LOADED	24,500 LBS
GROSS WEIGHT:	
FULLY EQUIPPED, LOADED	60,000 LBS

ENGINE:
445 BHP DIESEL ENGINE.

TRANSMISSION:
FOUR SPEED AUTOMATIC.

TRANSFER CASE:
TWO SPEED.

DIFFERENTIALS:
FRONT AND REAR TANDEM LOCKING DIFFERENTIALS.

TIRES:
53 INCH DIAMETER TUBE TYPE RADIAL TIRES.

ELECTRICAL SYSTEM:
24 VOLT.

PERFORMANCE AT GVW:

GRADEABILITY:	60%
SIDE SLOPE:	30%
GROUND CLEARANCE:	16 IN
FORDING DEPTH:	48 IN
APPROACH ANGLE:	45°
DEPARTURE ANGLE:	45°
CRANE CAPACITY:	45,833 FT LBS

RANGE:
300 MILES, WITH RATED PAYLOAD, AT CONSTANT SPEED OF 55 MPH (HIGHWAY).

SPECIAL PURPOSE KITS:
100 AMP ALTERNATOR KIT
ARCTIC KIT, ENGINE/CHASSIS
ARCTIC HEATER KIT, PERSONNEL
M16 RIFLE MOUNTING KIT
MACHINE GUN MOUNTING KIT
GAS PARTICULATE FILTER UNIT (GPFU)
M-8 CHEMICAL ALARM KIT
M-13 DECONTAMINATION APPARATUS

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MI 48397-5000.

MS PART NO.	
MS52221-1	WITH WINCH
MS52221-2	LESS WINCH

APPROVED 26 AUG 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, CARGO, TACTICAL, AMMO, 10 TON, 8x8 M977	MILITARY STANDARD MS52221(AT)
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.