

FED. SUP CLASS
2350

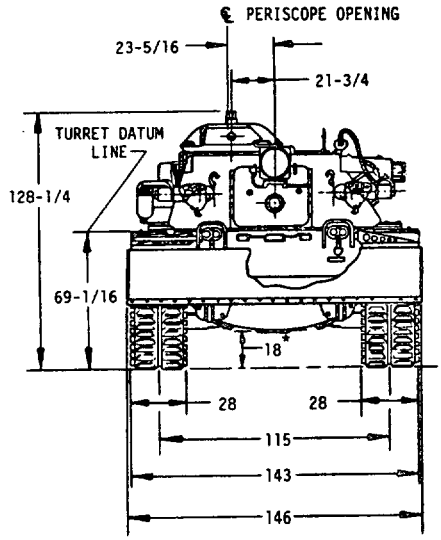

*15 @ CENTER OF ESCAPE HATCH

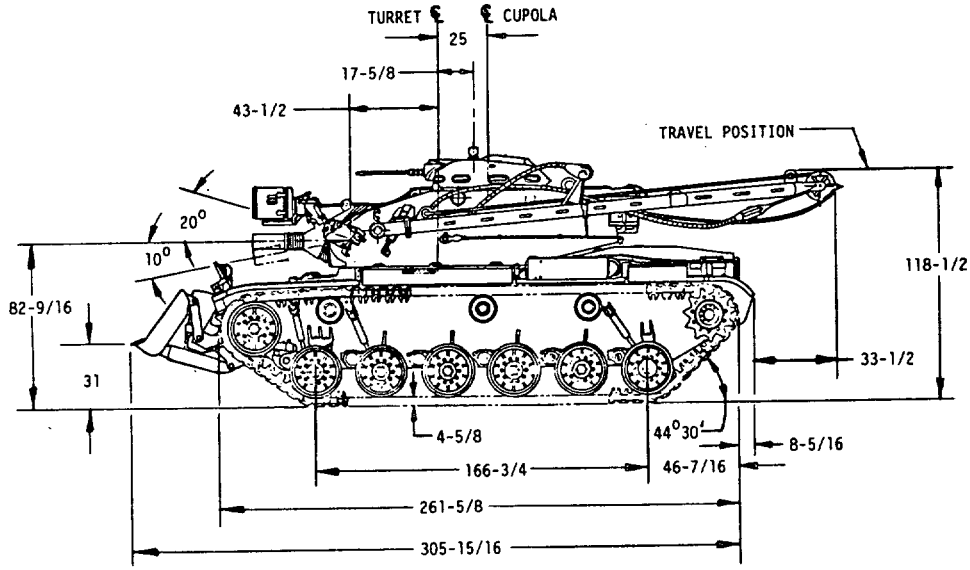

MS PART NO.	ENGINEERING DRAWING NO.
MS52222-1	8736334

APPROVED 26 AUG 85 REVISED

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: COMBAT ENGINEERS VEHICLE FULL TRACKED M728	MILITARY STANDARD MS52222(AT)
PROCUREMENT SPECIFICATION MIL-V-62008	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2350

VEHICLE CHARACTERISTICS

LIST OF EQUIPMENT:

BASIC ISSUE ITEMS	12291080
INTEGRAL COMPONENTS OF ITEMS	12291079
ADDITIONAL AUTHORIZED LIST	12291078
EXPENDABLE SUPPLIES AND MATERIALS LIST	12291077

VEHICLE INSTALLATION DRAWINGS:

CHASSIS ASSEMBLY	12270886
TURRET ASSEMBLY	9337885

SPECIFICATIONS:

VEHICLE SHIPMENT AND STORAGE SPEC	MIL-V-62060

REFERENCE DOCUMENTS:

CHART, PRODUCTION LUBRICATION	10940135
DIAGRAM, STRAP	10940574
CHART, TORQUE	10940607

WEIGHT:

FULLY EQUIPPED APPROX	117,400 LBS

ENGINE: AVDS-1790-2D
V-12, COMPRESSION IGNITION, AIR COOLED
GROSS HP 750 BHP @ 2400 RPM

TRANSMISSION: CD-850-6A
CROSS DRIVE
2 SPEEDS FORWARD, 1 REVERSE

VEHICLE ACCESSORY KITS:

KIT, WATER FORDING	11655621

PERFORMANCE:

MAX VEHICLE SPEED	30 MPH
CRUISING RANGE APPROX	280 MI
MAX GRADE ABILITY ASCENDING	60%
MAX GRADE ABILITY DECENDING	60%
MAX FORDING ABILITY WO/KIT	48 IN
VERTICAL OBSTACLE ABILITY	26 IN
MAX TRENCH WIDTH CROSSING	99 IN

ARMAMENT:

1 GUN, MACH, M240 TANK	7.62 MM
2 GUN, SUB MACH, M3A1	45 CAL
1 GUN, MACH, M85 (CUPOLA TYPE)	50 CAL
1 GUN, XM135	165 MM

AMMUNITION:

7.62 MM (MG)	3600 ROUNDS
CAL .45 (SMG)	360 ROUNDS
CAL 50 (MG)	728 ROUNDS
165 MM	63 ROUNDS
GRENADES,	12
GRENADES, SMOKE	24

CREW:
COMMAMDER, DRIVER,
GUNNER, LOADER

COMMUNICATION EQUIPMENT:

OPTIONAL RADIOS	AN/VRC-46
	AN/VRC-53
	AN/VRC-64
TRANSIENT SUPRESSOR	MX-7777-B/GRC
INTERCOM	AN/VIC-1

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 26 AUG 85 REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52222 -1	8736334

P. A. ARMY-AT / Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		COMBAT ENGINEERS VEHICLE FULL TRACKED M728	MS52222(AT)
PROCUREMENT SPECIFICATION MIL-V-62008	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.