


D24


FED. SUP CLASS
2320

REVIEW ACTIVITIES: ARMY-EL
USER ACTIVITIES: NAVY-DOCKS

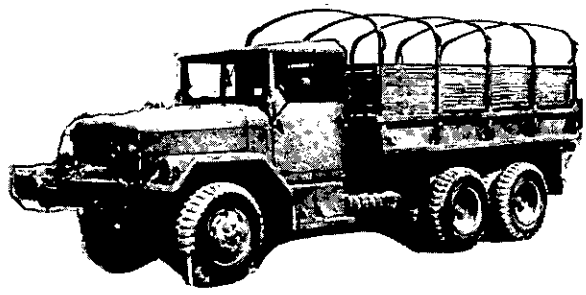

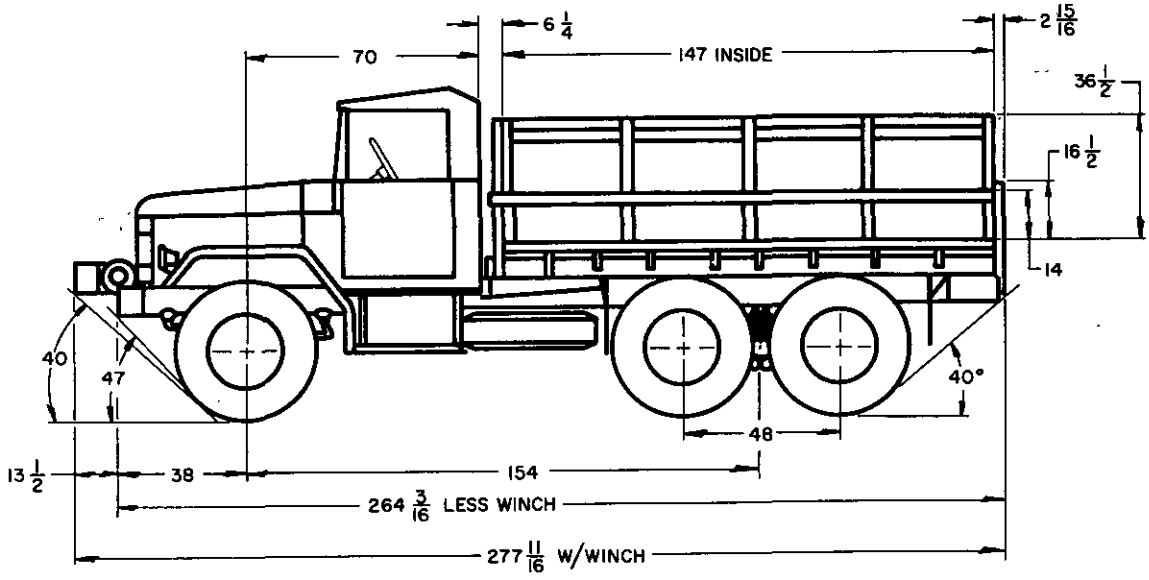

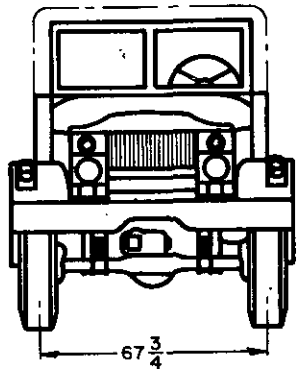

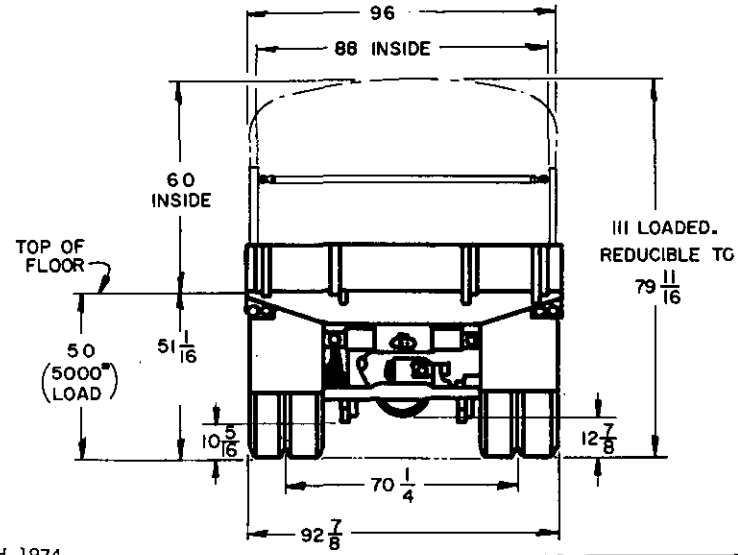

(A)

CANCELLED AFTER 20 MARCH 1974

SUPERSEDED BY MS500016 (M35A2)

MS PART NO.	DRAWING NO.	
MS 53071-1	8358464	WITH WINCH
MS 53071-2	8358463	LESS WINCH

APPROVED 15 MAY 1964 REVISED (A) 20 MARCH 1974

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MO (ATAC) Other Cust NAVY-MC	TITLE TRUCK, CARGO, 2-1/2 TON, 6X6, 154 IN. WHEEL BASE, M35	MILITARY STANDARD MS 53071
PROCUREMENT SPECIFICATION MIL-T-45362	SUPERSEDES:	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.

DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

VEHICLE CHARACTERISTICS

MODEL M35 CHASSIS M45
CHASSIS PART No. 8358196 W/WINCH MS 51392-1
CHASSIS PART No. 7368524 LESS/WINCH MS 51392-2

CURB WEIGHT FULLY EQUIPPED LESS PAYLOAD AND PERSONNEL

	WO/WINCH	W/WINCH
FRONT AXLE	5315	5810
REAR AXLE (BOGIE)	7150	7070
TOTAL	12465	12880

WEIGHT DISTRIBUTION: LOADED WITHOUT CREW

	CROSS COUNTRY		HIGHWAY	
	WO/W	W/W	WO/W	W/W
PAYLOAD	5000	5000	10000	10000
FRONT AXLE	5511	6006	5705	6700
INTER AXLE	5977	5937	8380	8340
REAR AXLE	5977	5937	8380	8340
TOTAL-LBS.	17465	17880	22465	23380

TOWED LOAD ALLOWANCE
LIMITED CROSS COUNTRY 6000 LBS.
HIGHWAY 10000 LBS

SHIPPING DIMENSIONS

	WO/WINCH	W/WINCH
CU. FT.	1164	1224
SQ. FT.	177	184.5

BODY ASSY.
INSTALLATION: CARGO BODY PART NO. 7370387
CARGO BODY PART NO. 8332225
CAB ASSY. PART NO. 8757744
BODY ASSY. PART NO. 7370332

GENERAL
THIS VEHICLE IS USED TO TRANSPORT GENERAL CARGO OR PERSONNEL. THE CAB IS CANVAS COVERED, OPEN TYPE. THE BODY IS A 12 FT. (147x88 IN. INSIDE) STEEL, FLAT BED TYPE. SIDES AND TARPAULIN FRAMES ARE REMOVABLE. BODY CARGO SPACE 456 CU FT. HEIGHT OF SIDES 14 IN., HEIGHT OF TAILGATE 16 1/2 IN. FOLDING TROOP SEATS (IN FOLDED POSITION FORM PART OF RACKS). BODY INCLUDES FIVE (5) TOP BOWS WITH TARPAULINS AND END FLAPS. STEP ON TAILGATE, FOR EASE OF ENTRANCE. FOUR AMBER REFLECTORS, TWO ON FRONT, ONE EACH SIDE FORWARD. FOUR RED REFLECTORS, TWO ON REAR. ONE EACH SIDE REARWARD.

ENGINE 6 CYL. 331 CU. IN.
COMP RATIO 6.73 TO 1 4 1/8 BORE 4 1/8 STROKE
BRAKE HP MAX. NET 127 @ 3400 RPM W/STD ACCESSORIES

FRONT SUSPENSION INSTALL. PART NO. 8757839
FRONT AXLE PART NO. 7521734
SHOCK ABSORBERS (2) PART NO. 7539007
SPRINGS, FRONT (2) PART NO. 7368628

REAR SUSPENSION INSTALL. PART NO. 8757834
REAR AXLE ASSY. (2) PART NO. 7368511
SPRINGS, REAR (2) PART NO. 7521792

WHEELS 7.5 x 20 (10) MS 53044-5

TIRES 9.00 - 20 (8) PLY (10) MS 35388-16
TREAD DESIGN NDCC TUBE (10) MS 35392-13
NUMBER OF SPARES - ONE

STEERING CAM AND TWIN LEVER PART NO. 8757840

BRAKES SERVICE
FRONT - HUB & DRUM ASSY. L.H. PART NO. 7529053
HUB & DRUM ASSY. R.H. PART NO. 7529054
REAR - HUB & DRUM ASSY. L.H. PART NO. 8757681
HUB & DRUM ASSY. R.H. PART NO. 8757682
DRUM SIZE - FRONT 15 X 3 REAR 15 X 3
ACTUATION - AIR/HYDRAULIC

BRAKES PARKING
DRUM SIZE - 14 X 3, MOUNTED ON REAR OUTPUT SHAFT OF TRANSFER

ELECTRICAL SYSTEM
WATERPROOF AND RADIO SUPPRESSED
POTENTIAL 24 VOLT
BATTERIES (2) 6TN,12 VOLT, MS 35000-4

STOP LIGHT TAILLIGHT (2) MS 51329-1

STOP LIGHT BLACKOUT (1) MS 51302-1

PERFORMANCE MILES PER GALLON 7 TO 5
CRUISING RANGE - HIGHWAY 300 MILES
MAXIMUM SPEED - 58 MPH @ 3400 R.P.M.

WINCH CAPACITY 10000 LBS. MS 51352-1

PINTLE CAPACITY 40000 LBS. MS 51118-1

TIE DOWNS 12 (6) EACH SIDE

FORDING KIT PART NO. 5701839
FORDING DEPTH W/FORDING KIT 72 IN.
FORDING DEPTH WO/FORDING KIT 30 IN.

THIS VEHICLE IS DESIGNED IN TWO (2) MAJOR COMPONENTS, CHASSIS AND BODY. FOR DATA ON CHASSIS, SEE MS 51392, AND DRAWINGS 8358196, 7368524.

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWINGS, PART NO. 8358464 WITH WINCH PART NO. 8358463 WITHOUT WINCH, COPIES OF WHICH MAY BE OBTAINED FROM ARMY TANK AUTOMOTIVE CENTER, DETROIT ARSENAL, WARREN, MICHIGAN, ATTN: STANDARDIZATION BRANCH.

REVIEW ACTIVITIES: ARMY-EL
USER: NAVY-DOCKS

APPROVED 15 MAY 1964 REVISED (A) FOR CHANGES SEE SHEET 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MO (ATAC) Other Cust NAVY-MC	TITLE TRUCK, CARGO, 2-1/2 TON, 6X6, 154 IN. WHEEL BASE, M35	MILITARY STANDARD MS 53071
PROCUREMENT SPECIFICATION MIL-T-45362	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.