


FED SUP CLASS
5306

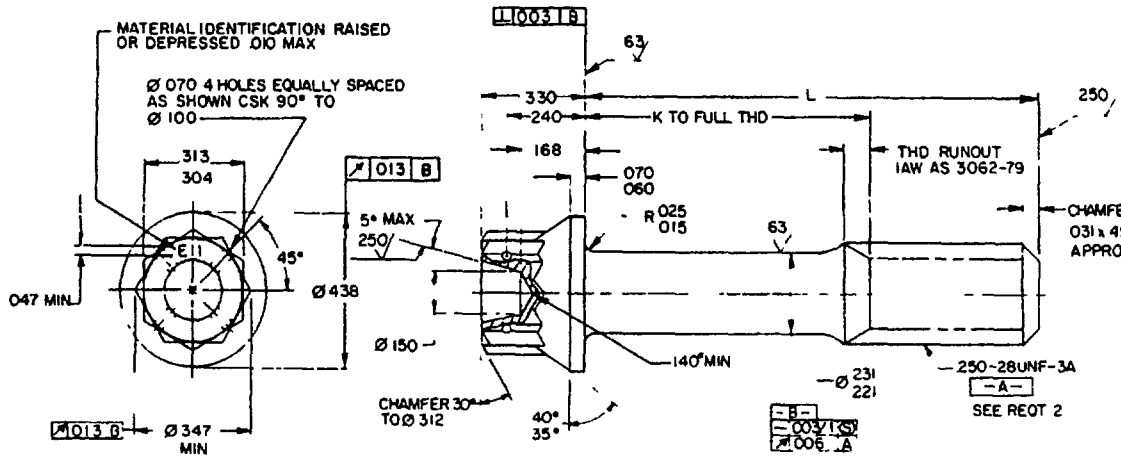


SECTION THRU THREAD PROFILE




OPTIONAL SHAPE OF HEAD

TABLE I. DASH NUMBERS AND DIMENSIONS

| DASH NUMBER | L | K +.000 -.060 | APPROX WEIGHT LBS/100 |
|---|---|---|---|
| -06 | .500 | 1/ | 1.29 |
| -07 | .562 | 1/ | 1.36 |
| -08 | .625 | 1/ | 1.44 |
| -09 | .688 | 1/ | 1.51 |
| -10 | .750 | 1/ | 1.58 |
| -11 | .812 | 1/ | 1.65 |
| -12 | .875 | .125 | 1.72 |
| -13 | .938 | .188 | 1.79 |
| -14 | 1.000 | .250 | 1.86 |
| -15 | 1.062 | .312 | 1.93 |
| -16 | 1.125 | .375 | 2.00 |
| -17 | 1.188 | .438 | 2.08 |
| -18 | 1.250 | .500 | 2.15 |
| -19 | 1.312 | .562 | 2.22 |
| -20 | 1.375 | .625 | 2.29 |
| -21 | 1.438 | .688 | 2.36 |
| -22 | 1.500 | .750 | 2.43 |
| -23 | 1.562 | .812 | 2.50 |
| -24 | 1.625 | .875 | 2.57 |
| -25 | 1.688 | .938 | 2.64 |
| -26 | 1.750 | 1.000 | 2.72 |
| -27 | 1.875 | 1.125 | 2.86 |
| -28 | 2.000 | 1.250 | 3.00 |
| -29 | 2.125 | 1.375 | 3.14 |
| -30 | 2.250 | 1.500 | 3.29 |
| -31 | 2.375 | 1.625 | 3.43 |
| -32 | 2.500 | 1.750 | 3.57 |
| -33 | 2.625 | 1.875 | 3.71 |
| -34 | 2.750 | 2.000 | 3.85 |
| -35 | 2.875 | 2.125 | 4.00 |
| -36 | 3.000 | 2.250 | 4.14 |
| -37 | 3.125 | 2.375 | 4.29 |
| -38 | 3.250 | 2.500 | 4.43 |
| -39 | 3.375 | 2.625 | 4.58 |
| -40 | 3.500 | 2.750 | 4.72 |
| -41 | 3.625 | 2.875 | 4.85 |
| -42 | 3.750 | 3.000 | 4.99 |
| -43 | 3.875 | 3.125 | 5.13 |
| -44 | 4.000 | 3.250 | 5.27 |
| -45 | 4.125 | 3.375 | 5.42 |
| -46 | 4.250 | 3.500 | 5.56 |
| -47 | 4.375 | 3.625 | 5.71 |
| -48 | 4.500 | 3.750 | 5.85 |
| -49 | 4.625 | 3.875 | 6.00 |
| -50 | 4.750 | 4.000 | 6.14 |
| -51 | 4.875 | 4.125 | 6.29 |
| -52 | 5.000 | 4.250 | 6.43 |
| -53 | 5.125 | 4.375 | 6.56 |
| -54 | 5.250 | 4.500 | 6.70 |
| -55 | 5.375 | 4.625 | 6.84 |
| -56 | 5.500 | 4.750 | 6.99 |
| -57 | 5.625 | 4.875 | 7.13 |
| -58 | 5.750 | 5.000 | 7.28 |
| -59 | 5.870 | 5.125 | 7.42 |
| -60 | 6.000 | 5.250 | 7.57 |

1/ THREAD TO HEAD, MAXIMUM TWO INCOMPLETE THREADS

INACTIVE FOR DESIGN AFTER
28 FEB 84
FOR PARTS WITH MIL-S-8879
SCREW THREADS SEE MS9924

© DENOTES CHANGES

APPROVED 25 APR 57 REVISED Ⓑ 25 SEP 86 ©12 JUN 87

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA-IS

| P.A. NAVY-AS Other Cust AIR FORCE-11 | INTERNATIONAL INTEREST | TITLE © BOLT-MACHINE, DRILLED 12 POINT HEAD, STEEL, .250-28 UNF-3A | MILITARY STANDARD MS 9089 |
|---|---|---|---|
| PROCUREMENT SPECIFICATION AMS 7452 | SUPERSEDES | | PAGE 1 OF 2 |

AMSC N/A

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

REQUIREMENTS:

(e) 1. MATERIAL: STEEL IN ACCORDANCE WITH AMS 6322-80

2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-7742. INCOMPLETE THREADS NOT TO ENTER FILLET.

3. FINISH: CADMIUM PLATE IN ACCORDANCE WITH AMS 2400-80. DIMENSIONS SPECIFIED ARE AFTER PLATING.

4. HARDNESS: 26-32 HRC.

5. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.

6. WRENCHING CONFIGURATION: WRENCHING CONFIGURATION IN ACCORDANCE WITH AS870-74.

7 SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES, EXCEPT UPSET HEAD, IN ACCORDANCE WITH ANSI B46.1.

8 MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83.

9. TOLERANCE UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ± 5°

10. EDGES. BREAK SHARP EDGES .003 - .015, UNLESS OTHERWISE SPECIFIED.

11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9089-06

DASH NUMBER

BASIC MS NUMBER

MS9089-06 INDICATES: BOLT, MACHINE, STEEL DRILLED 12 POINT HEAD; .250-28 UNF-3A; LENGTH .500

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. DO NOT USE UNASSIGNED PART NUMBERS.

3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6. AS AND AMS ARE SAE PUBLICATIONS.

7 SUBJECT TERM (KEY WORD) LISTING.

BOLT, MACHINE, STEEL DRILLED 12 POINT HEAD, CADMIUM PLATE

APPROVED 25 APR 57 REVISED © FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES.

REVIEWER ACTIVITIES. DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

| | | | |
|---|---|---|---|
| P A NAVY—AS Other Cust AIR FORCE-11 | INTERNATIONAL INTEREST | TITLE © BOLT-MACHINE, DRILLED 12 POINT HEAD, STEEL, .250-28 UNF-3A | MILITARY STANDARD MS 9089 |
| PROCUREMENT SPECIFICATION AMS 7452 | SUPERSEDES: | | PAGE 2 OF 2 |

DD FORM 672-1 COORDINATED! PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1189

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.