KKK-T-1286A
April 17, 1974

SUPERSEDING
Int. Fed. Spec. KKK-T-001286
February 28, 1967

FEDERAL SPECIFICATION

TRUCK, HAND, SHELF

(TRAY-SERVICE AND GENERAL UTILITY)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for trucks used for tray-service, medium-duty material handling and general utility.

1.2 Classification. The truck covered by this specification is one type only.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation of bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

FF-C-77 - Casters, Institutional Duty.
QQ-S-766 - Steel Plates, Sheets, and Strip-Corrosion Resisting.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-C-650 - Crates, Wood, Open and Covered

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards, and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-P-116 - Preservation, Methods of.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents from a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:46Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies shall be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N.W. Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Construction. The trucks covered by this specification shall be all welded construction, except for attachment of bumper, casters, and wheels, in accordance with figures 1 and 2.

3.2 Tolerances. The overall tolerances shall be ± 1-inch. Tolerances for shelf spacing shall be ± 1/4-inch.

3.3 Material. Except where otherwise specified, the material shall be in accordance with QQ-S-766, class 304, 18-8 stainless steel. The thickness of material used will be as specified in table I.

TABLE I. Minimum thickness of material used

Component part	Thickness (inches)
Frame	0.065
Shelves	0.050
Push handle	0.065
Caster mounting channel	0.093
Axle brackets	0.125

3.4 Frame. The frame shall be U-shape and constructed of 1-1/4-inch diameter stainless steel tubing.

3.5 Shelves. Shelves shall be class 304, 18-8 stainless steel. The shelves shall be recessed approximately 1/2-inch at a point 1-inch from all four edges at which point the shelves slope upward at an angle as illustrated in section A-A of figure 1. The edges shall be flanged down and hemmed. The flange shall be approximately 1-1/2-inch and the hem shall be not less than 7/8-inch. The corners shall be notched to fit the frame at approximately 90° to provide greater strength.

3.6 Push handle. The handle shall be class 304, 18-8 stainless steel 1-inch diameter push handle. The handle shall be attached to the uprights of the truck and shall provide a clearance of not less than 1-3/4-inch from the truck. The ends shall be closed flush with sides of truck.

3.7 Casters. Casters shall be in accordance with FF-C-77, type II, class C, 5-inch wheel diameter, style A and mounting P. The casters shall be mounted on a channel mounted on the push handle end of the truck. The mounting channel shall be approximately 4-1/4 inches wide, 3/4-inch deep, and 24 inches long. The casters shall be mounted on each end of the mounting channel without extending beyond the side of the truck. They shall provide maximum stability and maneuverability requiring not more than 40 pounds of lateral pressure (applied to handle) to move the loaded truck from a standing position.

3.8 Wheels. Wheels shall be 10 inches in diameter, separable steel disc construction and having not less than 1-3/16-inch wide demountable soft tread gray non-marking rubber tires. All exposed parts shall be cadmium plated. Ball bearing wheels shall be provided with dust caps over the bearings.

3.8.1 Wheel axle. The wheel axle shall be not less than 5/8-inch diameter cold-rolled steel enclosed in a corrosion-resistant steel tubular housing of proper inside diameter to prevent rattling and proper length to act as a spacer between the wheels. The ends of the axle shall be threaded to receive nuts for securing the wheels.

3.9 Bumper. The bumper shall be gray non-marking rubber, not less than 1-inch wide nor less than 3/4-inch thick, extending beyond all other parts of the truck, and securely mounted in a stainless steel channel, to permit easy removal for repair or replacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

3.10 Finish. Unless otherwise specified, exposed surfaces shall have a No. 4 finish.

3.11 Marking. Trucks shall be permanently and inconspicuously marked with the manufacturer's name or trade-mark.

3.12 Workmanship. Workmanship shall be first-class in every respect. The hand trucks shall be free from sharp edges, slivers, and burrs that may be injurious to personnel and any other defects affecting appearance and serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Lot. A lot shall consist of all hand trucks submitted for inspection at the same time.

4.2.1 Sampling for inspection and acceptance. Unless otherwise specified, sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105.

4.2.2 Inspection of materials and components. The supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2.3 Intermediate visual and dimensional examination. Examination shall be made at appropriate intermediate stations to check for defects in construction, workmanship, dimensions, and material which cannot be checked or measured after final assembly.

4.2.4 Visual examination. Each end item shall be examined for defects,in finish material, construction, workmanship, and marking, as outlined in table II.

TABLE II. Classification of defects

Examine	Defects	Major	Minor
Finish	Not as specified.	X	
Material	Not as specified.	X	
Design	Any characteristic not in accordance with specification.	X	
Construction and Workmanship	Parts missing or not specified type or size.	X	
	Sharp edges or burrs; bowed, malformed, deteriorated, dented or otherwise affect serviceability or that may be injurious to personnel.	X	
	Not connected or joined as specified, or poorly accomplished, affecting serviceability.	X	
Welding	Burn holes; incomplete, missing, or otherwise not fused properly.	X	
Bolts, Nuts, and Screws (when applicable)	Stripped, loose or broken.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (continued)

Examine	Defects	Major	Minor
Assembly	Out of alignment, not properly assembled, secured or otherwise affecting serviceability.	X	
	Not properly assembled or secured, but not affecting serviceability.		X

4.2.4.1 Dimensional examination. Examination shall be made of the end item to determine compliance with dimensional requirements. Any dimension which does not meet the specified tolerances shall be classified as a defect. The inspection level shall be S-2 with an acceptable quality level (AQL) of 6.5 defects, expressed in defects per hundred units.

4.2.4.2 Sampling for test. A random sample of hand trucks shall be taken from each lot in accordance with 4.3. If any truck fails any of the test, the lot shall be rejected.

4.3 Test.

4.3.1 Shelf load. Each shelf shall support 200 pounds placed on the center square foot area for a period of one (1) hour after which the truck shall be examined for any damage and permanent deformation.

4.3.2 Handle pull test. Restrain the truck from tipping and apply a downward test pull of 100 pounds at the handle center for a period of 1/2-hour after which the handle shall be inspected for any damage or permanent deformation.

4.4 Inspection of preparation for delivery. An inspection shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table III. For examination of contents the sample unit shall be one shipping container fully prepared for delivery selected just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be III and the AQL shall be 4.0 defects per hundred units.

TABLE III. Classification of preparation for delivery defects

Examine	Defects
Markings	Omitted; incorrect; illegible; or improper size, location; sequence, or method of application.
Materials	Any component missing, or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps; loose strapping, inadequate stapling; bulging or distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, or C, as specified (see 6.2).

5.1.1 Level A. The trucks shall be packaged method III in accordance with MIL-P-116.

5.1.2 Level C. Trucks, packaged as specified in 5.1, shall be packaged in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification Rules or the National Motor Freight Classification Rules.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T12:46Z
Check the source to verify that this is the current version before use.

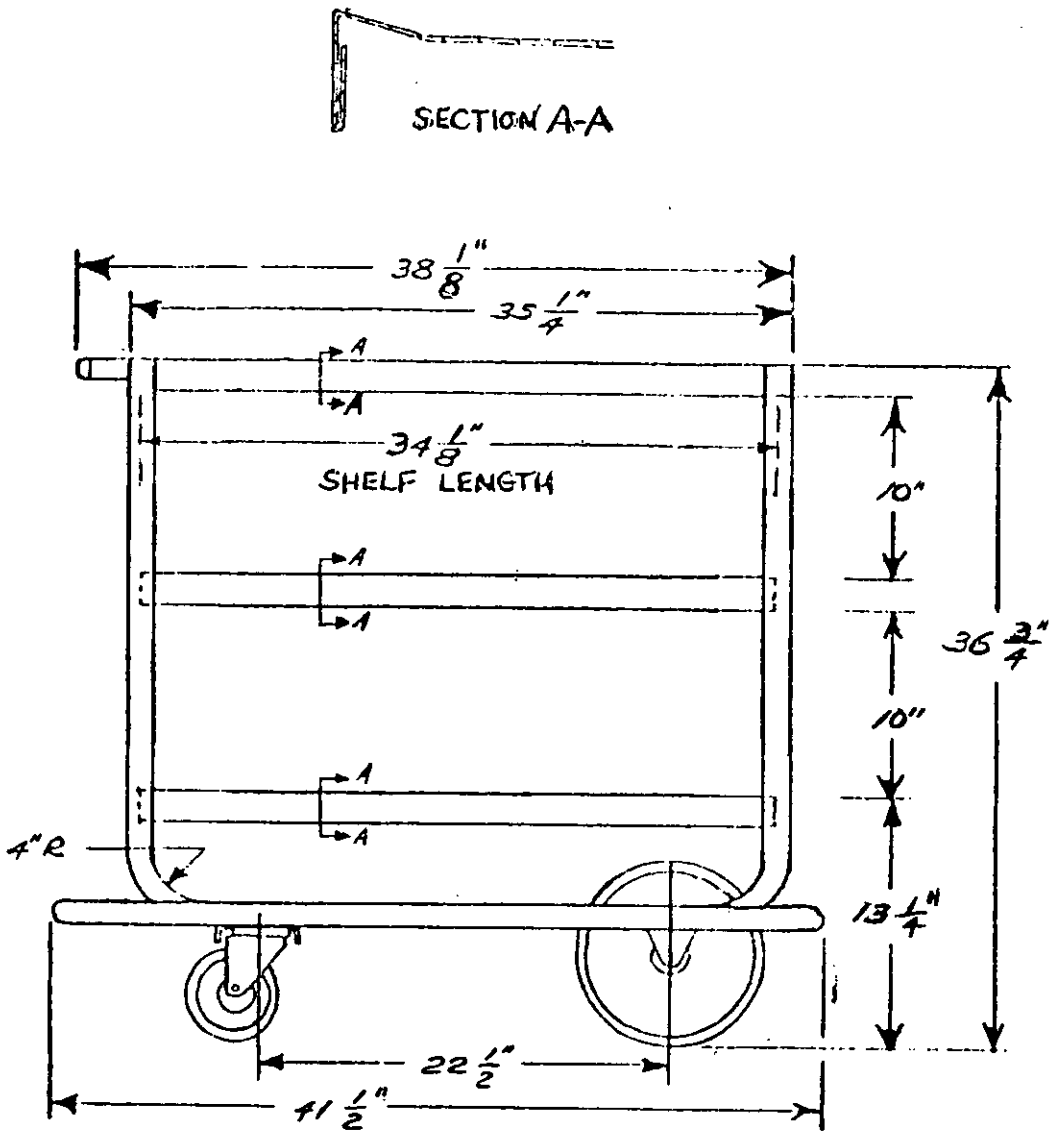


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T12:46Z
Check the source to verify that this is the current version before use.

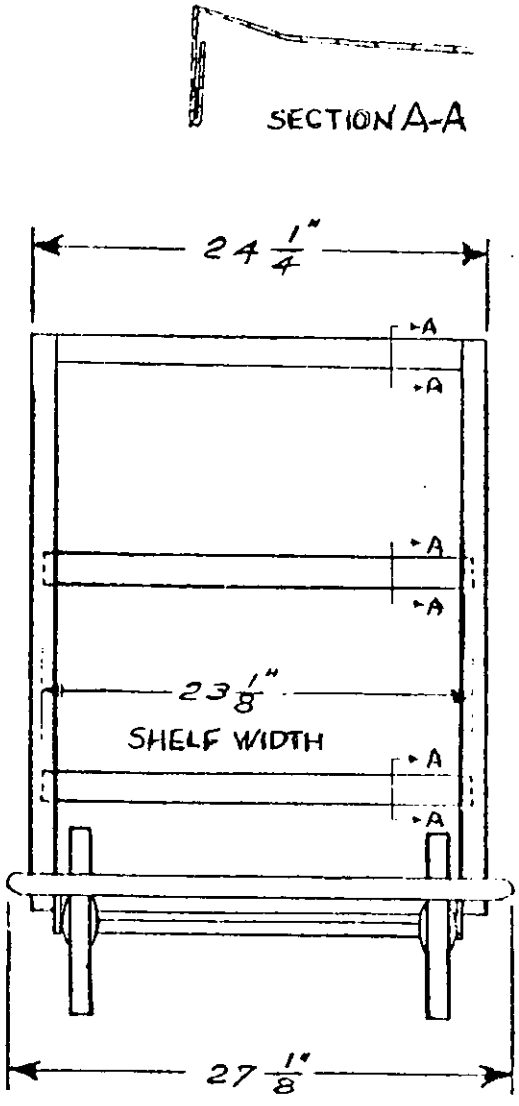


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:46Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2)

5.2.1 Level A. Trucks shall be packed in a close-fitting crate conforming to PPP-C-650, type I, style B. A shroud shall be provided. Strapping shall be in accordance with the appendix to the crate specification.

5.2.2 Level B. Trucks shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with method II of the appendix to the box specification. The gross weight of the shipping container shall not exceed the weight limitation of the box specification.

5.2.3 Level C. Trucks packaged as specified in 5.1 shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification Rules or the National Motor Freight Classification Rules.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order (see 6.2), packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to markings required by the contract or order (see 6.2), the packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The hand truck covered by this specification is intended for use in hospitals.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Level of packaging required (see 5.1).
(c) Level of packing required (see 5.2).
(d) Additional marking when required (see 5.3.1 and 5.3.2).

Military coordination activity:

DGSC-GS

Preparing activity:

GSA-FSS

CIVIL AGENCY COORDINATING ACTIVITIES:

DC GOVT - DCG
GSA-FSS
VA-DMS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:46Z
Check the source to verify that this is the current version before use.