
MIL-C-13516/8A
23August 1968
SUPERSEDING
MIL-C-13516/8
18 January 1966

MILITARY SPECIFICATION SHEET
CIRCUIT BREAKERS; 28 VOLT DC, AUTOMATIC, NONWATERPROOF, 105 to 200 AMP

The complete requirements for procuring the circuit breakers described herein shall consist of this document and the issue in effect of Specification MIL-C-13516.

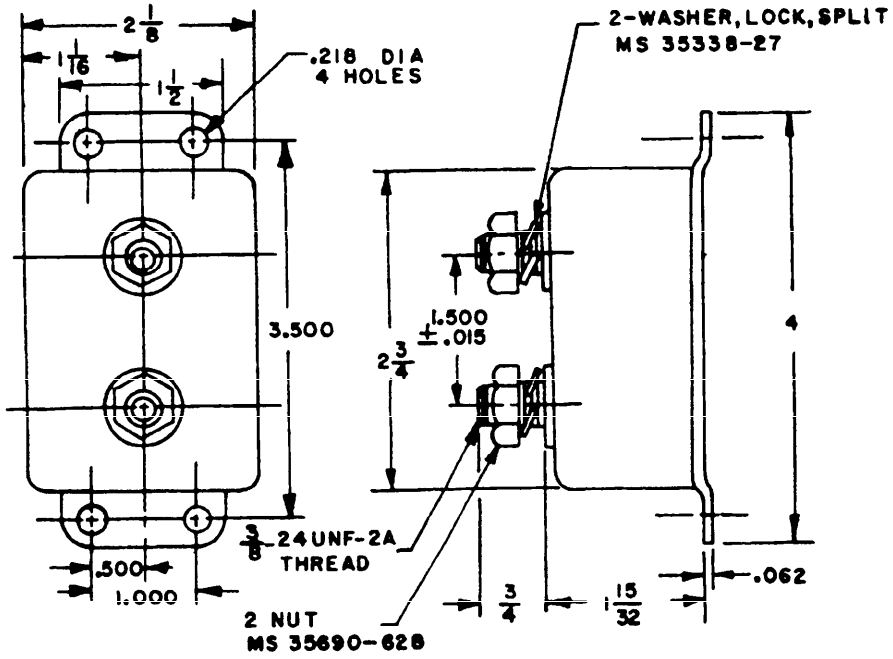

NOTE: Unless otherwise specified dimensions are in inches: Tolerance ± 1/32 on fractions; ± .010 on decimals.

CLASSIFICATION: Type II (Automatic reset), Grade B (Nonwaterproof), Class 2 (Over 30 amperes rating).

FSC-5925

Source: https://assist.dla.mil -- Downloaded: 202610-18T00:47Z
Check the source to verify that this is the current version before use.

Part No.	Former Part No.	Amperage Rating
M13516/8-1		105
M13516/8-2		120
M13516/8-3		135
M13516/8-4		150
M13516/8-5		160
M13516/8-6	MS 39069-1	175
M13516/8-7	MS 39069-2	200

Custodian:
Army - AT
Navy - EC
AF - 85

Review activities:
Army - EL, MU

User activities:
Army - AV, ME

Preparing activity:
Army - AT

Project No. 5925-0048-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:47Z
Check the source to verify that this is the current version before use.