INCH-POUND
MIL-DTL-13531/1
22 April 1998
SUPERSEDING
A-A-52548/1
11 March 1996
MS500077C(AT)
19 June 1976

DETAIL SPECIFICATION SHEET

HOSE ASSEMBLY, NONMETALLIC: HYDRAULIC AND PNEUMATIC, MEDIUM PRESSURE, FLARED TUBE

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-13531.

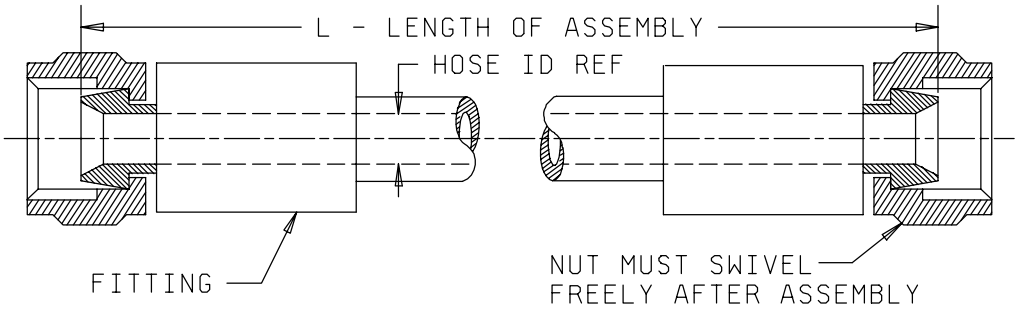

NOTES:
1. All undimensioned pictorial representations are for reference purposes only.
2. Dimension “L” is the defined length of the hose assembly.
3. Hose assemblies shall be specified in the following length increments:
   a. Under 24 inches - ½ inch increments.
   b. 24 to 36 inches - 1 inch increments.
   c. Over 36 inches - in not less than 2 inch increments.
4. Tolerances : ± 1/8 for length under 24 inches, ± 1/4 for length from 24 to 36 inches, ± 1% for length over 36 inches.

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:49Z
Check the source to verify that this is the current version before use.

TABLE I. Hose and fitting thread sizes.

Size	Hose ID reference		Hose OD reference				Fitting thread reference
			Class A		Class B		
	Inch	mm	Inch	mm	Inch	mm	
3	0.187	5.0	0.500	12.5	0.465	11.8	3/8-24
4	0.250	6.5	0.625	15.9	0.527	13.4	7/16-20
5	0.312	8.0	0.688	17.5	0.590	15.0	½-20
6	0.375	9.5	0.781	20.0	0.684	17.4	9/16-18
8	0.500	12.5	0.906	23.0	0.805	20.5	¾-16
10	0.635	15.9	1.031	26.0	0.930	23.6	7/8-14
12	0.750	19.0	1.187	30.0	1.086	27.6	1-1/16-12
14	0.875	22.0	1.313	33.3	1.211	31.0	1-3/16-12
16	1.000	25.5	1.500	38.1	1.430	36.3	1-5/16-12
20	1.250	32.0	1.812	46.0	1.741	44.2	1-5/8-12
24	1.500	38.0	2.082	53.0	1.968	50.0	1-7/8-12
32	2.000	51.0	2.625	66.7	2.500	63.5	2-1/2-12

REQUIREMENTS

Design and configuration: See figure 1.

Hose material: Type I, class A or B.

Fitting material:

S - Corrosion resistant steel.
C - Carbon steel zinc plated.

Fittings: In accordance with SAE J516 female 37°, flared type.

Part or Identifying Number (PIN). The PIN's to be used for hose assemblies acquired to this specification are created as shown below.

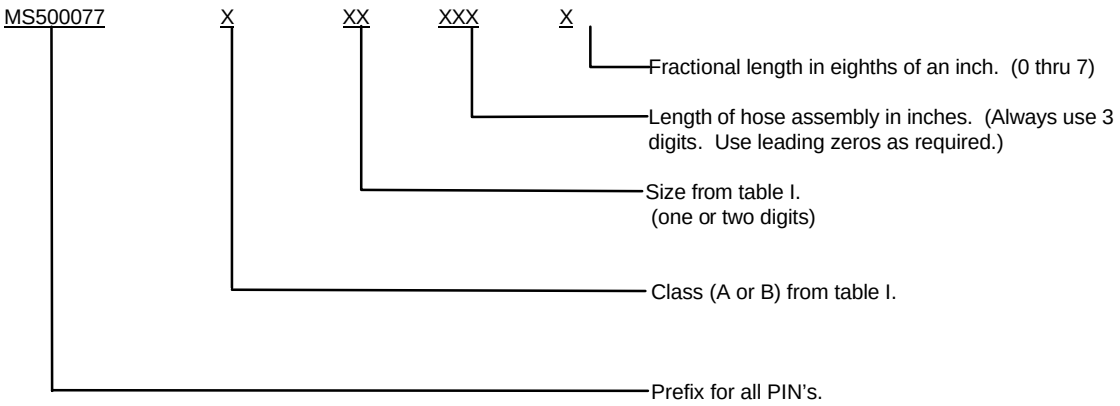

The old MS number is used in the PIN to maintain backwards compatibility with existing parts and higher level drawings. Some existing MS PIN's do not completely fit the above layout, but they should continue to be used without change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:49Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Army - AT

Preparing activity:
Army - AT

Review activities:
Army - AR, AV, CR4, MI

(Project 4720-0136)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:49Z
Check the source to verify that this is the current version before use.