INCH-POUND
MIL-DTL-13531/2
22 April 1998
SUPERSEDING
A-A-52548/2
11 March 1996
MS500083C(AT)
24 October 1973

DETAIL SPECIFICATION SHEET

HOSE ASSEMBLY, NONMETALLIC: HYDRAULIC AND PNEUMATIC, HIGH PRESSURE, FLARED TUBE

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-13531.

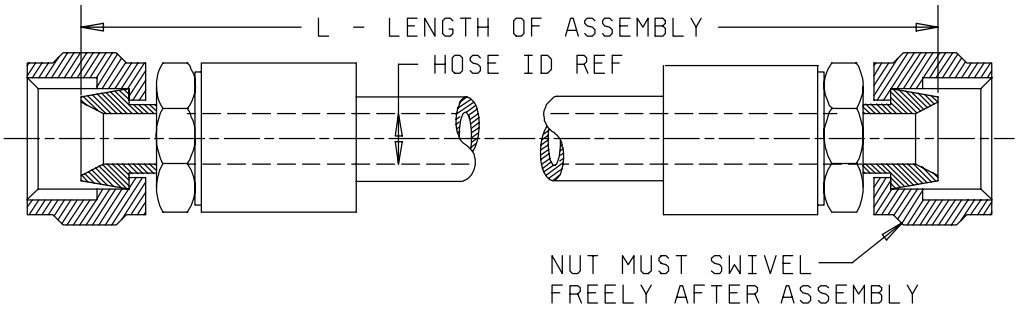

NOTES:
1. All undimensioned pictorial representations are for reference purposes only.
2. Dimension “L” is the defined length of the hose assembly.
3. Hose assemblies shall be specified in the following length increments:
   a. Under 24 inches - ½ inch increments.
   b. 24 to 36 inches - 1 inch increments.
   c. Over 36 inches - in not less than 2 inch increments.
4. Tolerances : ± 1/8 for length under 24 inches, ± 1/4° for the length from 24 to 36 inches, ± 1% for length over 36 inches.

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:49Z
Check the source to verify that this is the current version before use.

TABLE I. Hose and fitting thread sizes.

Dash number		Hose ID reference		Hose OD reference				Fitting thread reference
				Class A		Class B		
Permanent fittings	Reuseable fittings	Inch	mm	Inch	mm	Inch	mm	
3	33	0.187	5.0	0.625	15.9	0.535	13.6	3/8-24
4	34	0.250	6.5	0.687	17.5	0.593	15.0	7/16-20
6	35	0.375	9.5	0.843	21.4	0.754	19.0	9/16-18
8	36	0.500	12.5	0.968	24.6	0.874	22.2	¾-16
10	37	0.635	15.9	1.093	27.8	1.008	25.6	7/8-14
12	38	0.750	19.0	1.250	31.8	1.156	29.4	1-1/16-12
16	39	1.000	25.5	1.562	39.7	1.500	38.1	1-5/16-12
20	40	1.250	32.0	2.000	51.0	1.867	47.4	1-5/8-12
24	41	1.500	38.0	2.250	57.1	2.148	54.5	1-7/8-12
32	42	2.000	51.0	2.750	70.0	2.648	67.3	2-1/2-12

REQUIREMENTS

Design and configuration: See figure 1.

Hose material: Type II or III, class A or B.

Fitting material:

S - Corrosion resistant steel.
Z - Carbon steel zinc plated.

Fittings: In accordance with SAE J516 female 37°, flared type.

Part or Identifying Number (PIN). The PIN's to be used for hose assemblies acquired to this specification are created as shown below.

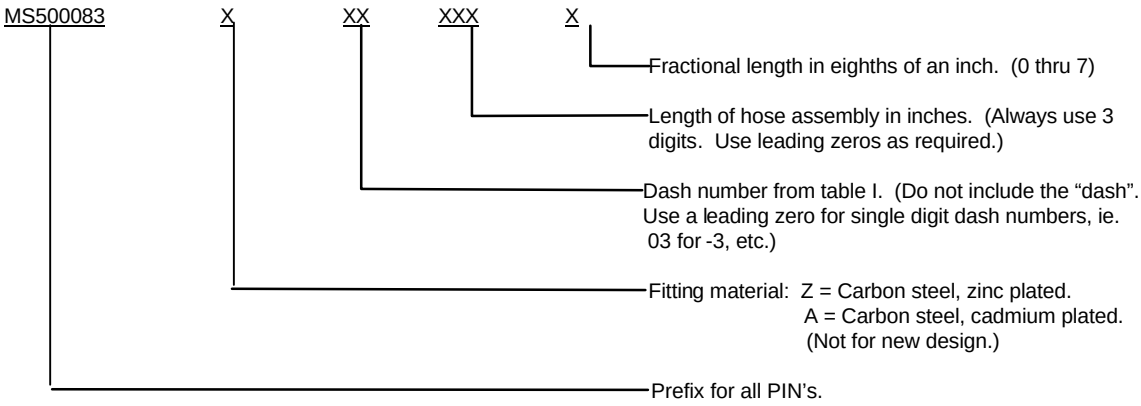

The old MS number is used in the PIN to maintain backwards compatibility with existing parts and higher level drawings. Some existing MS PIN's do not completely fit the above layout, but they should continue to be used without change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:49Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Army - AT

Preparing activity:
Army - AT

Review activities:
Army - AR, AV, CR4, MI

(Project 4720-0137)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:49Z
Check the source to verify that this is the current version before use.