MIL-P-13538(Ord)
13 July 1954
SUPERSEDING
FCP No. 957 - 54
20 April 1954

MILITARY SPECIFICATION

PACKAGING OF MOUNT, TELESCOPE, M54

1. SCOPE

1.1 This specification covers the preservation, packaging, packing, and marking of Mount, Telescope, M54 for overseas shipment or domestic shipment involving extended storage; domestic shipment for limited storage; and domestic shipment for immediate use.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standard, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

C-F-206	- Felt, Mechanical Roll
FF-N-105	- Nails, Wire, and Staples
MM-P-515	- Plywood, Container Grade
QQ-S-781	- Strapping, Flat, Steel
QQ-S-790	- Strapping, Round; Steel, Bare and Zinc-Coated
UU-T-111	- Tape; Paper, Gummed (Sealing and Securing)
PPP-B-601	- Boxes, Wood, Cleated-Plywood

Military

JAN-P-100	- Packaging and Packing for Overseas Shipment - General Specification
MIL-A-101	- Adhesive, Water-Resistant, for Sealing Fiberboard Boxes
JAN-P-106	- Boxes, Wood, Nailed (Overseas Type)
JAN-P-108	- Boxes, Fiberboard, Corrugated and Solid (Military Type)
MIL-P-116	- Preservation, Methods of
JAN-P-117	- Packaging and Packing for Overseas Shipment - Bags, Interior Packaging
JAN-B-121	- Barrier-Materials, Greaseproof
JAN-P-127	- Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant

STANDARD

Military

MIL-STD-129	- Marking for Shipment and Storage

(Copies of specifications, standards, and drawings, required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Disassembly.--Clamp assembly C7670105 shall be removed from the mount.

3.2 Cleaning.--All exposed unpainted metal surfaces shall be cleaned in accordance with process C-4 followed by C-8 of Specification MIL-P-116. The cleaned surfaces shall be dried in accordance with method D-4 of Specification MIL-P-116.

3.3 Preservation.-

3.3.1 The cleaned and dried surfaces of the mount including the mounting hardware shall be coated with P-5 preservative conforming to Specification MIL-P-116. The telescope holding clamp shall be unloosened and preservative applied to the hidden inner surfaces. The unpainted surfaces of the clamp assembly C7670105 shall be coated with P-5 preservative conforming to Specification MIL-P-116.

3.4 Packaging.

3.4.1 The preserved surfaces of the telescope holding assembly shall be covered with greaseproof barrier material conforming to type I or II, grade C, class 2 of Specification JAN-B-121. (See figure 2.)

3.4.2 The clamp assembly and the set of mounting hardware shall each be wrapped in greaseproof barrier material conforming to grade A, any class, of Specification JAN-B-121. Each wrap shall be secured with gummed tape conforming to Specification UU-T-111. The two packages shall be placed in one waterproof bag conforming to type I or II, grade A, class b or c of Specification JAN-P-117. The bag shall be closed by heat sealing after the excess entrapped air is removed. (See figure 2.)

3.4.3 The plywood support block shall be prepared as shown. The plywood shall conform to Specification NN-P-515. The slot shall be cushioned with felt, impregnated to resist mildew, and shall conform to classification 8R, type 5, of Specification C-F-206. The felt shall be glued to the sides of the slot. The mounting end of the support block, facing the mount, shall be covered with at least one layer of grade C, type I or II, class 2, barrier material of Specification JAN-P-121. (See figures 3 and 4.)

3.4.4 The mount shall be positioned in such a manner that the extension will slide into the cushioned slot and the mounting holes line up with the holes in the support block. Two bolts with washers under heads shall be placed through the support block and barrier material. A flat washer and a lock washer shall be placed under each nut. The exposed threads above the nuts shall be coated with unthinned paint or preservative conforming to type P-1 of Specification MIL-P-116. (See figure 4.)

3.4.5 The bag containing the clamp assembly and the mounting hardware shall be secured to the inside of the yoke of the mount with pressure-sensitive tape, conforming to any type or grade of Specification JAN-P-127. (See figure 5.)

3.4.6 Cleats shall be attached to side boards with clinched nails. A spreader shall be nailed in position between the side boards (see figure 6.) The lumber used for the side boards, cleats, and spreader shall conform to Specification JAN-P-106, group I or II. The areas on one pair of cleats and the area on the spreader, where the mount will make contact, shall be covered with greaseproof barrier material conforming to type I or II, grade C, class 2 of Specification JAN-B-121. (See figures 3 and 6.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

3.4.7 The side boards with spreader shall be positioned in a fiberboard box conforming to compliance symbol V2s, V3s, or V3c, style RSC of Specification JAN-P-108. The support block with prepackaged mount shall fit snugly between the side board cleats. The fiberboard box shall be closed by folding the flaps parallel to the side boards first. Water-resistant adhesive, conforming to Specification MIL-A-101, shall be applied over all areas of contact between the flaps, and by covering all seams, including the manufacturer's joint with pressure-sensitive tape conforming to any type or grade of Specification JAN-P-127. (See figure 7.)

3.5 Packing.

3.5.1 Oversea shipment or domestic shipment involving extended storage.- Four packaged mounts shall be immobilized in a shipping container conforming to style A or B of Specification PPP-B-601, type III, class 1; or style 2 or 4 of Specification JAN-P-106.

3.5.2 Domestic shipment for limited storage.-The unit container may be utilized as the shipping container.

3.5.3 Domestic shipment for limited storage.-The unit container may be utilized as the shipping container.

3.6 Marking.

3.6.1 Marking shall be in accordance with Standard MIL-STD-129.

3.6.2 The bag containing the mounting hardware and the clamp assembly shall be identified respectively as:

1 SET OF MOUNTING HARDWARE
1 CLAMP, ASSEMBLY

3.6.3 The serial number of each mount shall appear with the permanent marking on each unit container. A shipping box, containing more than one unit, shall have a packing list, as specified in Standard MIL-STD-129, showing the serial numbers of the mounts contained therein.

3.6.4 Each container for either DOMESTIC SHIPMENT FOR IMMEDIATE USE or DOMESTIC SHIPMENT FOR LIMITED STORAGE shall be plainly marked as such on the shipping container.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection.-Inspection of the entire packaging process shall be made. The shipping container and the contents of at least one fiberboard box (see 3.4.7) from each item inspection lot shall be examined thoroughly to determine compliance with this specification.

4.2 Test procedure.-When deemed necessary by the inspector, one packed shipping container from each item inspection lot shall be subjected to the preservative retention test and the rough handling test specified in Specifications MIL-P-116 and JAN-P-100, respectively. Failure of either test shall be cause for rejection of the lot.

5. PREPARATION FOR DELIVERY

(Not applicable.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data.-Procurement documents should specify the title, number, and date of this specification and the type of shipment to be made.

6.2 The following indicates the stock number to be added in the identification data:

Item	Stock No.
Mount, Telescope, M54, with mounting hardware	F002-7578424

TABLE I
DIMENSIONS OF SHIPPING CONTAINERS

DOMESTIC AND OVERSEAS SHIPMENT

	Dimensions in Inches		
	Length	Width	Height
Inside	31	16-5/8	16-5/8
Outside	34	17-3/4	17-3/4
Displacement:	6.2 cubic feet		

TABLE II
WEIGHTS

	Fiberboard Box	Domestic and Overseas Container
Net	25 lbs.	100 lbs.
Tare	7 lbs.	52 lbs.
Gross	32 lbs.	152 lbs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

TABLE III
BILL OF MATERIAL

Dimensions in Inches (Min.)

Part	Req'd	Length	Width	Thickness	Reference
Domestic and Overseas Container (per 4 Items)					
*Sheathing (Top & Bottom)	2	32-1/2	17-3/4	9/16	JAN-P-106
*Sheathing (Side)	2	34	16-5/8	9/16	JAN-P-106
*Sheathing (End)	2	16-5/8	16-5/8	3/4	JAN-P-106
*Cleats (End)	4	17-1/2	2-1/4	3/4	JAN-P-106
Strapping, Flat	2	80	1/2	.020	QQ-S-781 type I, cl A or B QQ-S-790 cl A or B
or Round	2	80	.0915 (13 gage)		
Nails, 8d	As required for assembly				FF-N-105
Nails, 5d	As required for cleating				FF-N-105
Interior Fiberboard Box and Contents (per Item)					
*Box (Inside Dimensions)	1	16-1/8	16-1/8	7 (Depth)	JAN-P-108, V2s, V3s or V3c, RSC
Support Block	1	14-5/8	7	3/4	NN-P-515 Fig. 3
Side Boards	2	16	7	3/4	JAN-P-106 Fig. 3
Cleats	4	7	1-1/4	3/4	JAN-P-106 Fig. 3
Spreader	1	14-5/8	1-5/8	1-5/8	JAN-P-106 Fig. 3
Nails, 5d	16	For cleating			FF-N-105
Nails, 8d	4	For spreader			FF-N-105
Felt	1	8	3/4	1/2	C-F-206 (Type 5) Cl. 8R

* Container dimensions are approximate and may vary slightly due to manufacturer's practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

Dimensions in Inches (Min.)

Part	Req'd	Length	Width	Thickness	Reference
Barrier-Material Greaseproof	1	18	12		JAN-B-121, gr A, any class
Barrier-Material Greaseproof	1	18	12		JAN-B-121, type I or II, gr C, class 2
Bag, Waterproof	1	10	8		JAN-P-117, type I or II,gr A, class b or c
Tape, Pressure-Sensitive		14 ft.	2 in.		JAN-P-127 any type or grade
Tape, Paper		6 in.	1 in.		UU-T-111
Bolt, Machine	2	2-1/2 in. 3/8 dia. with 2 flat washers, lock washer and nut per bolt			
Adhesive, Water Resistant		As required			MIL-A-101
Cleaning Material		As required			MIL-P-116 method C-4 and C-8
Preservative		As required			MIL-P-116, type P-5
Unthinned Paint or Preservative		As required			MIL-P-116, type P-1

PATENT NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or therwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related hereto.

CUSTODIAN:

Army-Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

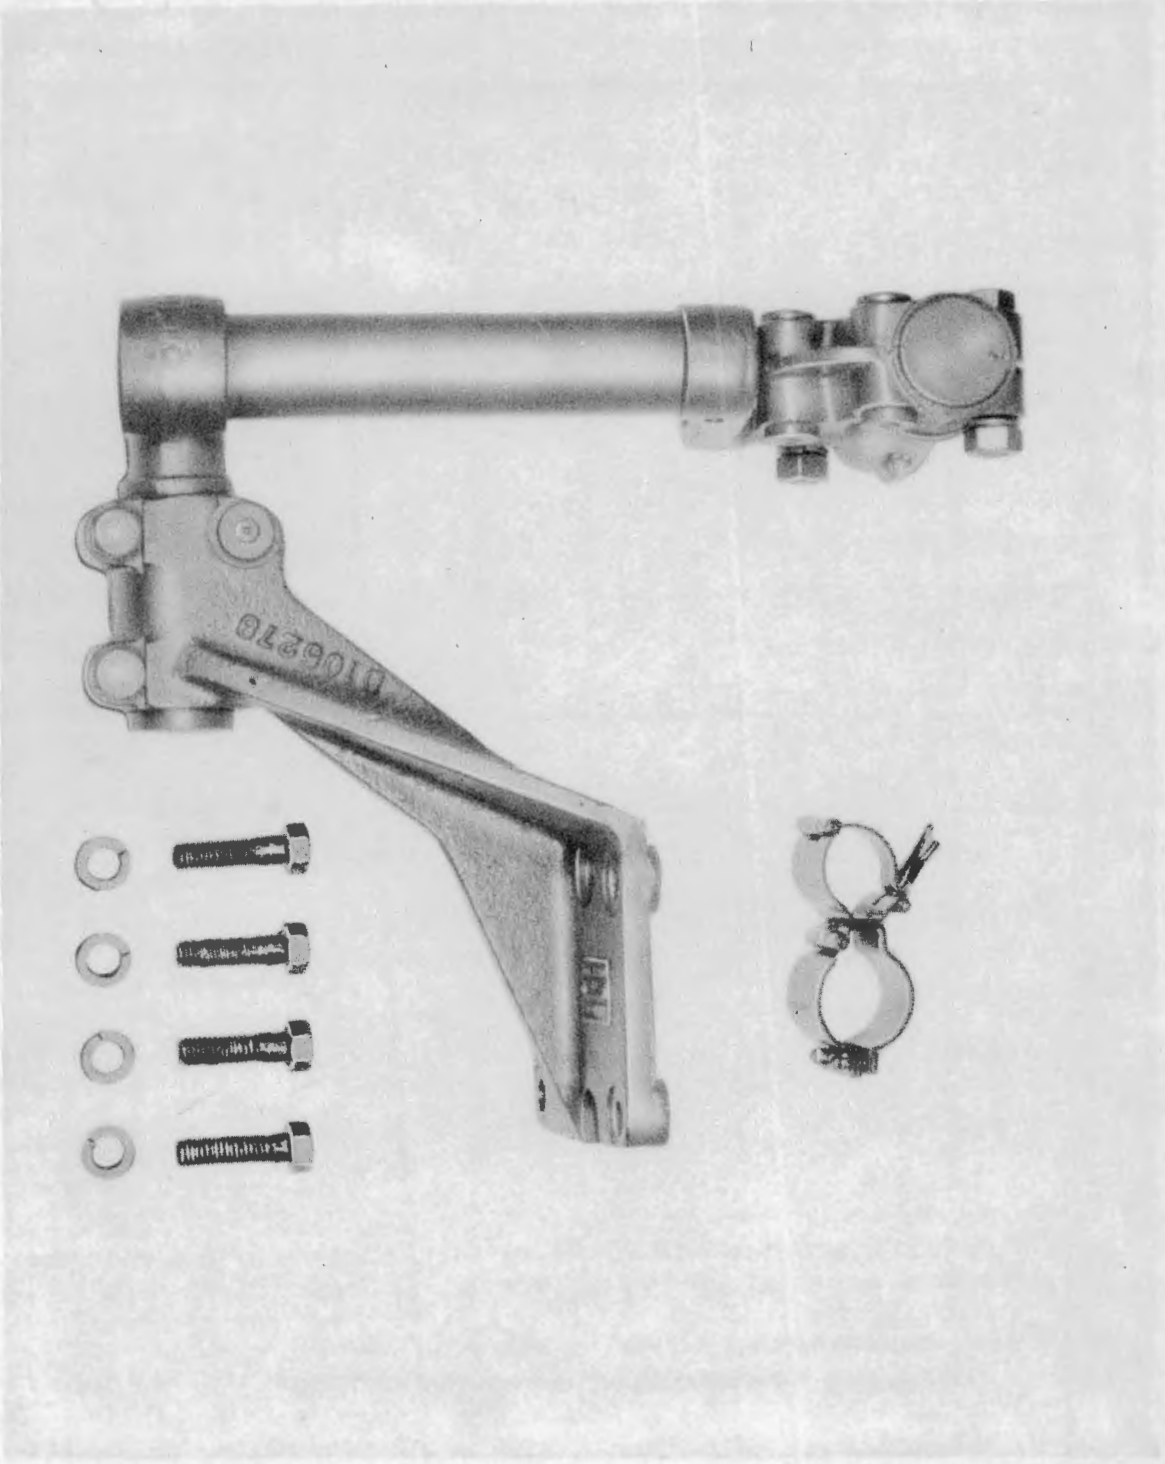


FIGURE 1
MOUNT, TELESCOPE, M54, WITH MOUNTING HARDWARE AND CLAMP ASSEMBLY DISMOUNTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

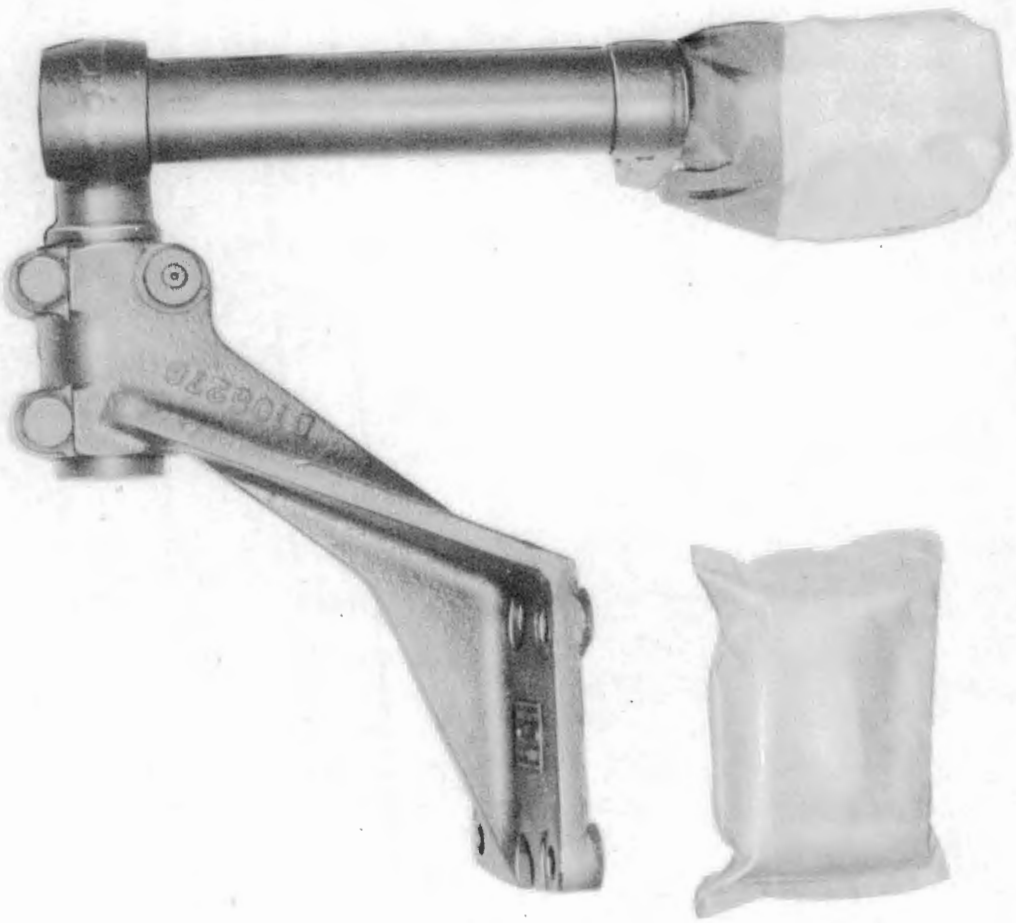


FIGURE 2
MOUNT, TELESCOPE, M54, WITH MOUNTING HARDWARE PREPARED FOR PACKING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

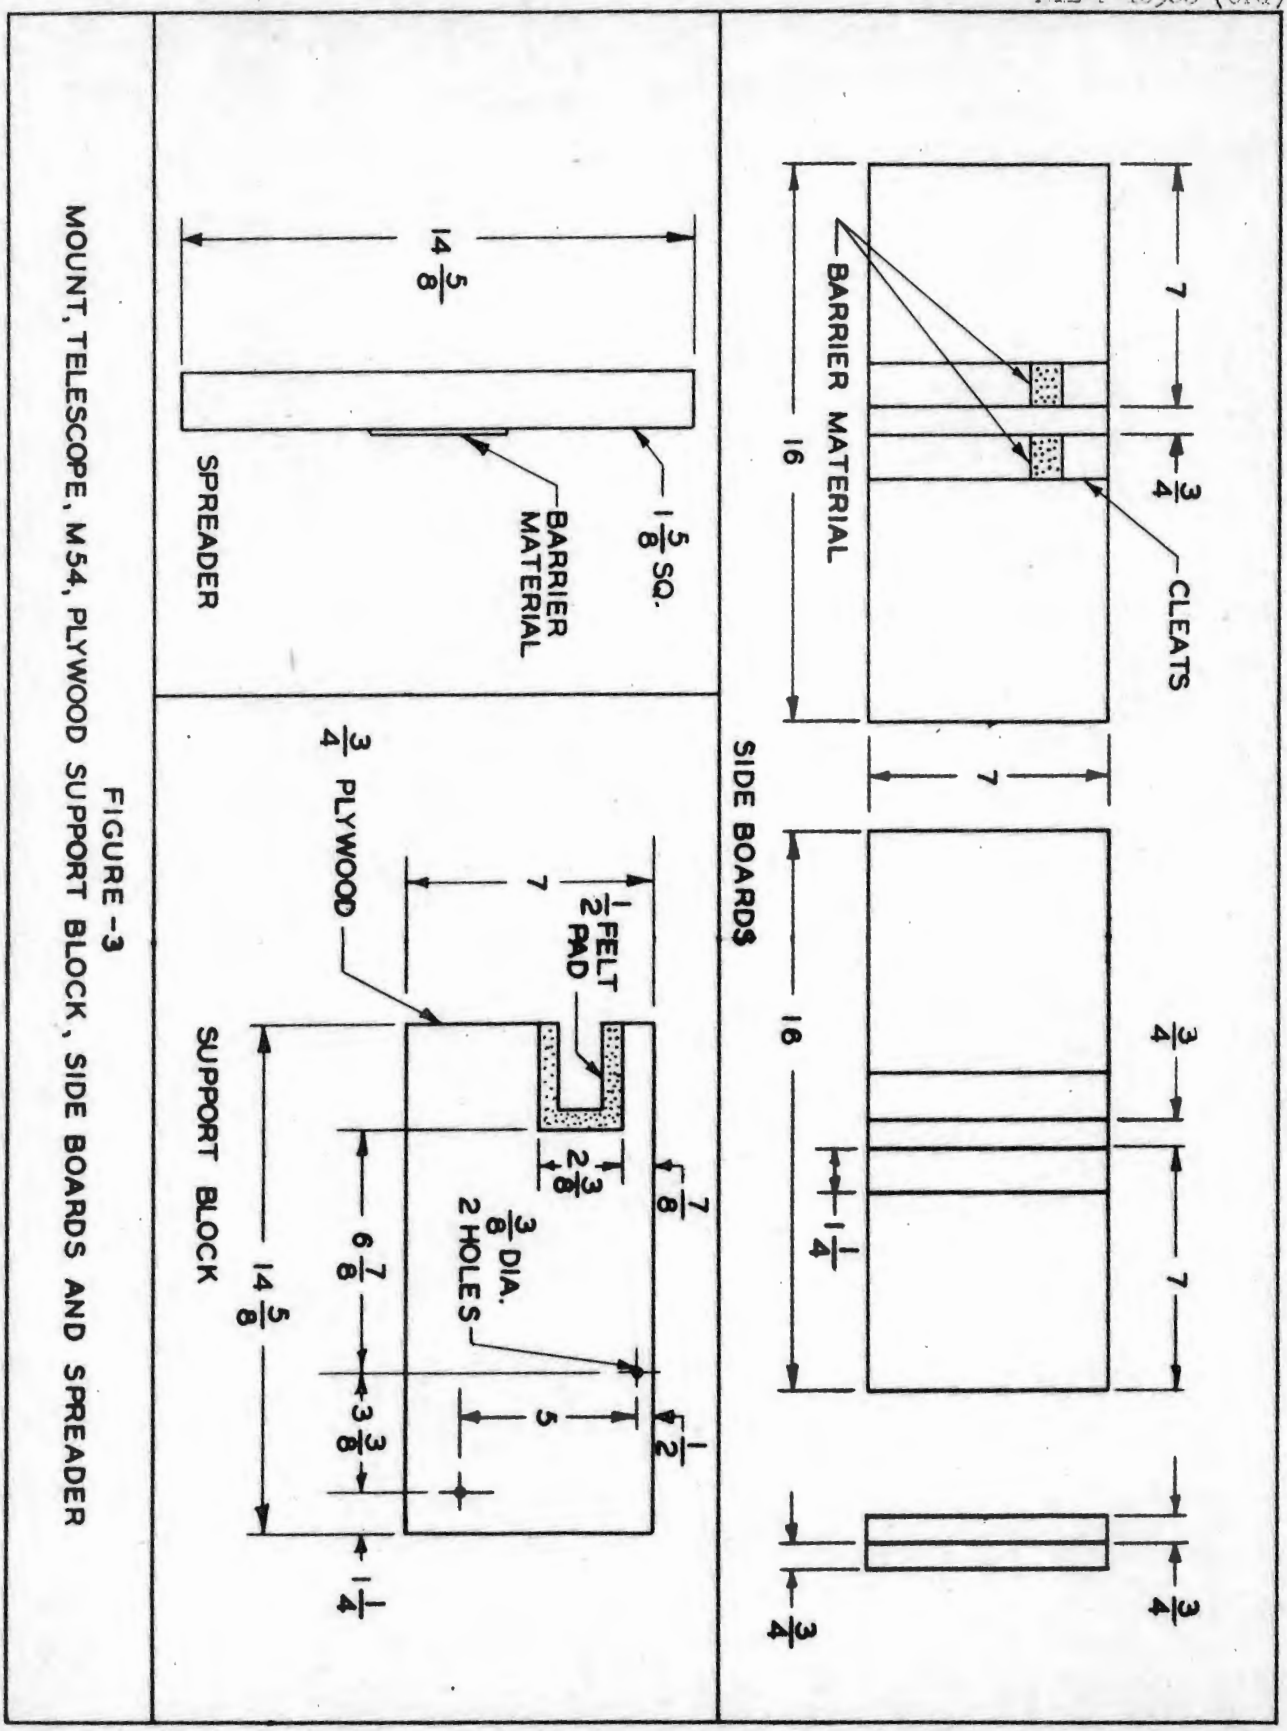


FIGURE -3

MOUNT, TELESCOPE, M54, PLYWOOD SUPPORT BLOCK, SIDE BOARDS AND SPREADER

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

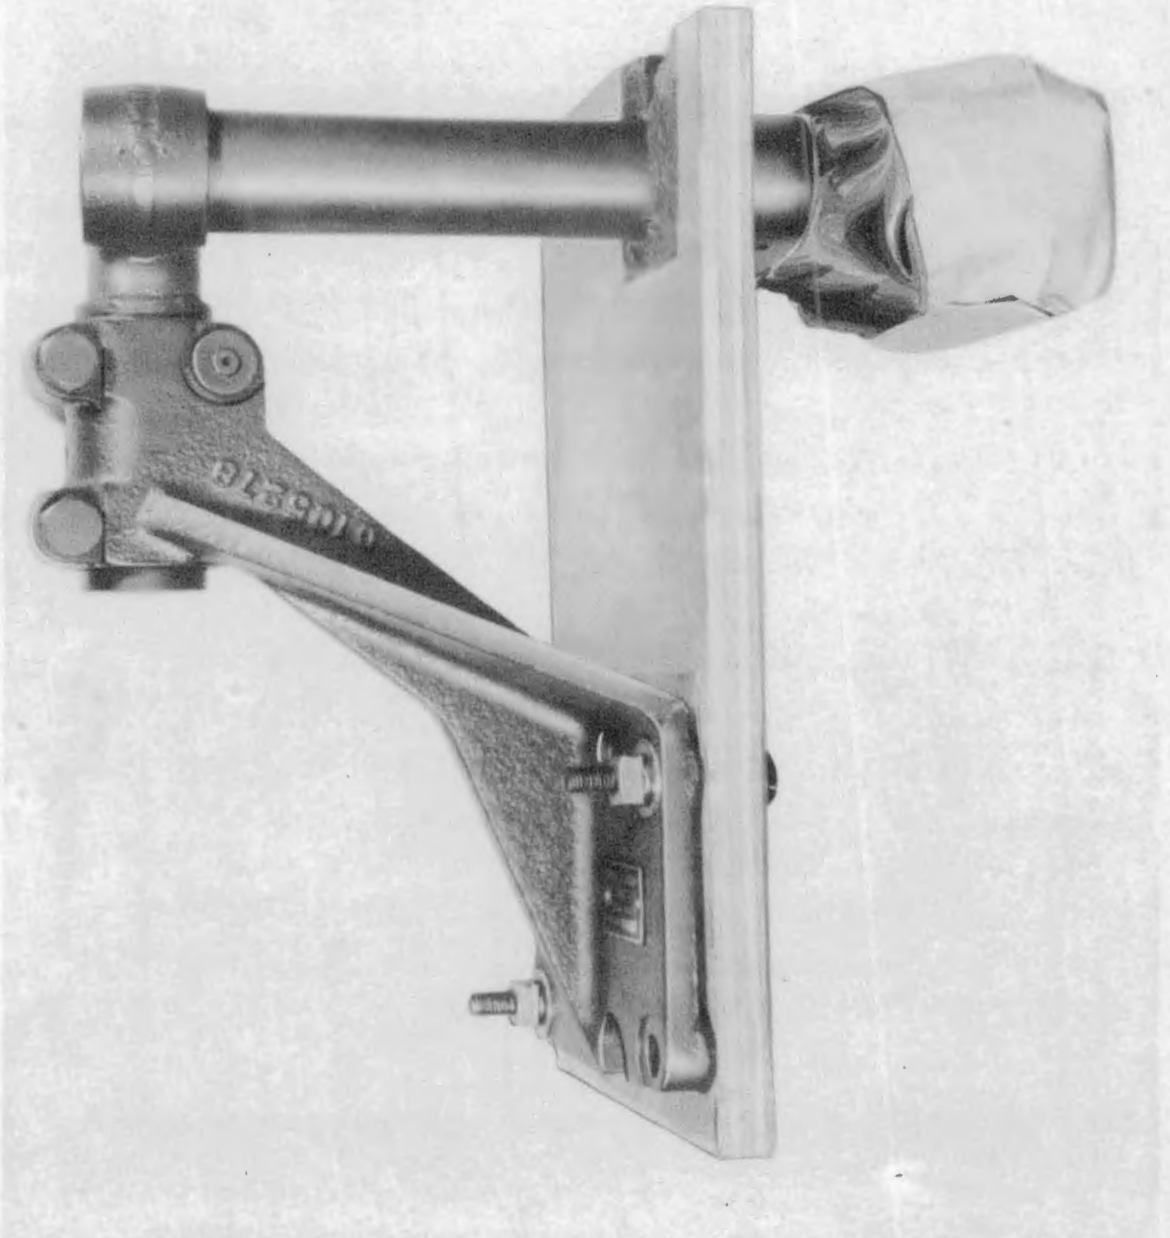


FIGURE 4. MOUNT, TELESCOPE, M54, MOUNTED ON SUPPORT BLOCK.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

FIGURE 5
MOUNT, TELESCOPE, M54, BAGGED CLAMP ASSEMBLY AND HARDWARE TAPED TO YOKE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

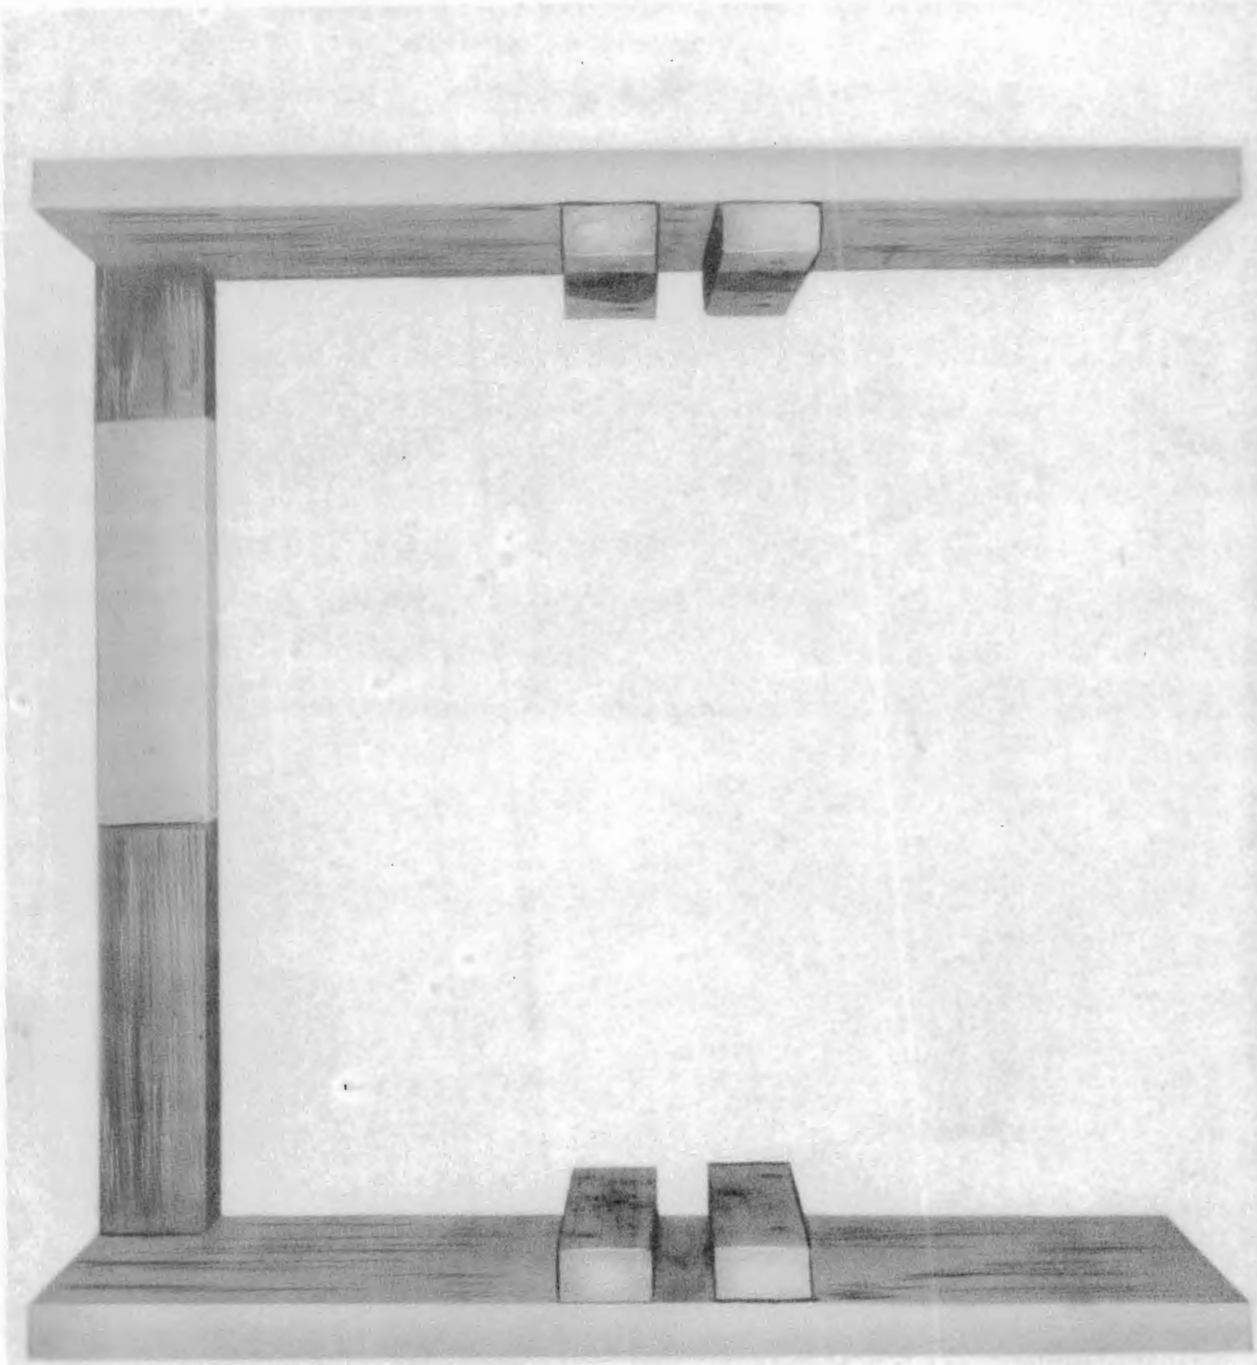


FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.

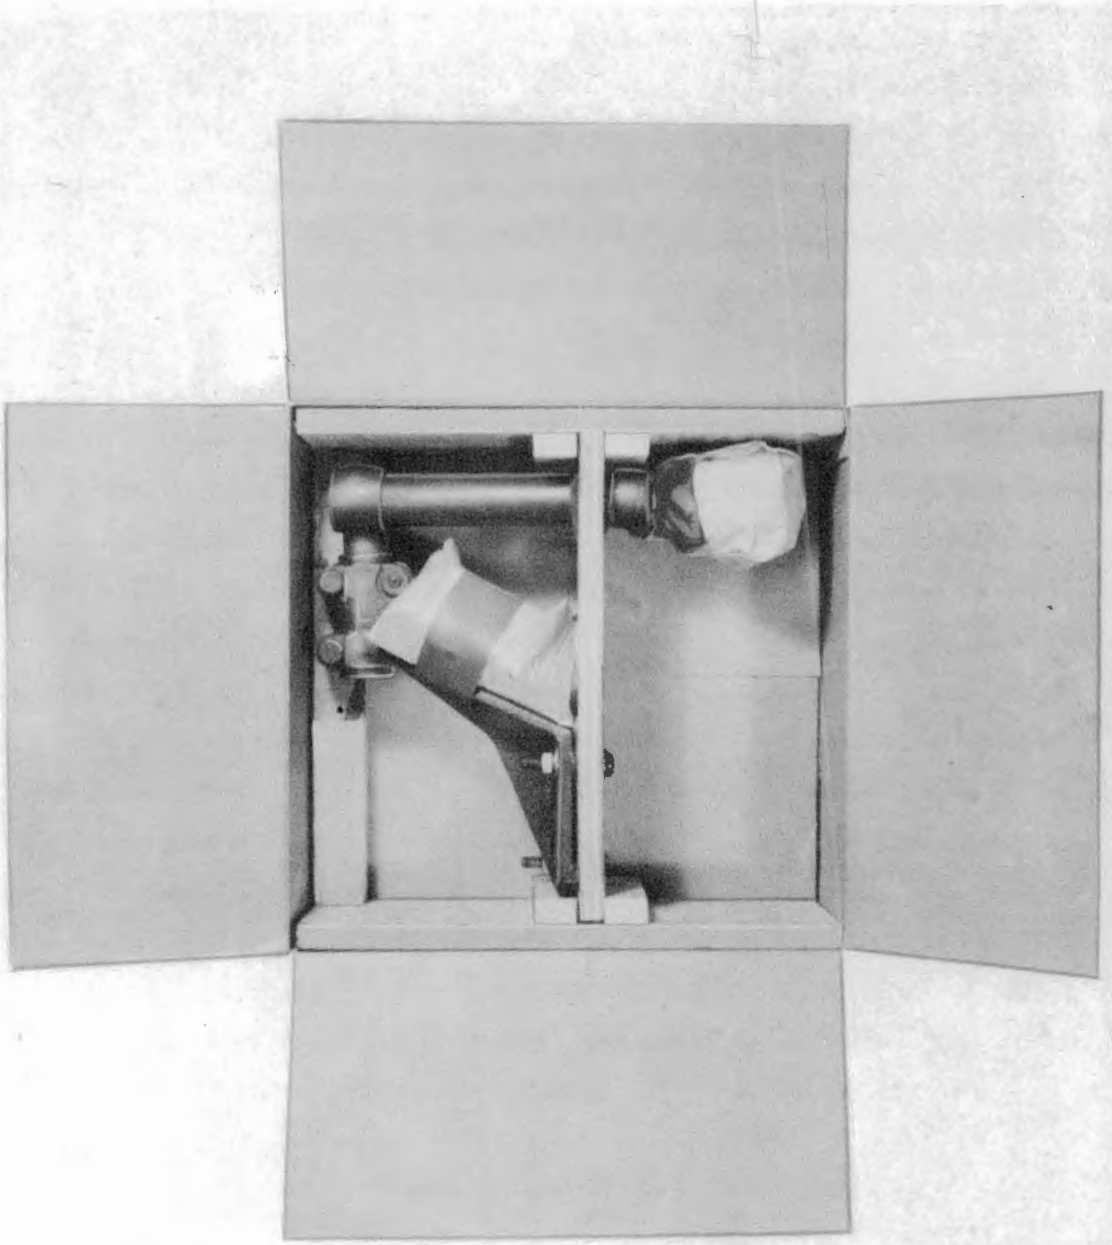


FIGURE 7. MOUNT, TELESCOPE, M54, WITH MOUNTING HARDWARE AND CLAMP ASSEMBLY POSITIONED IN FIBERBOARD CONTAINER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T00:50Z
Check the source to verify that this is the current version before use.